

# Matrox® Display Wall

**Mura™ IPX Series • Mura™ MPX Series • C-Series™**

System Builder's Guide

20149-101-0580  
2021.08.20

[www.matrox.com/video](http://www.matrox.com/video)

**matrox®**

---

# Contents

<b>Product overview .....</b>	<b>6</b>
Hardware summary – Mura MPX Series .....	6
Mura MPX-4/4 .....	6
Mura MPX-4/2 .....	7
Mura MPX-4/0 .....	8
Mura MPX-V16 .....	9
Mura MPX-V8 .....	10
Mura MPX-SDI .....	11
Hardware summary – Mura IPX Series .....	12
MURAIPXI-E4SF/MURAIPXI-E4SHF .....	12
MURAIPXI-E2MF/MURAIPXI-E2MHF .....	13
MURAIPXI-D2MF/MURAIPXI-D2MHF .....	14
MURAIPXI-E4JF/MURAIPXI-E4JHF .....	15
MURAIPXI-D4JF/MURAIPXI-D4JHF .....	16
Hardware summary – Matrox C-Series .....	17
Matrox C900 .....	17
Matrox C680 .....	18
<b>Why choose a validated platform? .....</b>	<b>19</b>
Platforms validated by Matrox .....	19
Validated systems .....	19
Validated motherboards .....	20
Validated PCIe expansion solution .....	20
Validated chassis .....	20
C-Series system requirements .....	22
<b>Validated systems .....</b>	<b>23</b>
Before you begin .....	23
Mura MPX Series based video wall system .....	23
C900/C680 based video wall system .....	24
Third party based video wall system .....	25
Currently supported systems .....	26
Advantech (AVS-540 with ASMB-815 MB) .....	26
Dell® Precision™ Rack 7910 .....	28
Dell® Precision™ 5810 Tower Workstation .....	29
Dell® Precision™ 5820 Tower Workstation .....	31
HP® Z4 G4 Workstation .....	33
HP® Z420 Workstation .....	34
HP® Z440 Workstation .....	35
HP® Z6 G4 Workstation .....	37
HP® Z620 Workstation .....	39
HP® Z640 Workstation .....	40
HP® Z8 Workstation .....	41
InoNet Magnus-II .....	43
Lenovo ThinkStation P520 .....	44
Portwell® M8030 .....	46
Portwell® M9030 (with ROBO-8110A SHB) .....	48

Portwell® M9030 (with ROBO-8113VG2AR SHB).....	50
Portwell® M9030 (with ROBO-8113VG2AR-Q170-KBL SHB) .....	52
Seneca VWC-PLUS.....	54
Shuttle SH97R6 .....	56
End of Life (EOL) systems .....	57
Advantech (AVS-240).....	57
Advantech (AVS-290).....	59
Advantech (AVS-540 with ASMB-822I MB).....	60
Advantech (AVS-541).....	62
Advantech (AVS-840 with PCE-5129 SHB).....	66
Advantech (AVS-840) .....	68
Advantech (AVS-840 with PCE-7129 SHB).....	71
Advantech (AVS-860).....	73
Advantech (AVS-860 with PCE-5129 SHB).....	75
Advantech (AVS-860 with PCE-7129 SHB).....	77
Blue Chip Ultima 2M.....	79
Blue Chip Ultima Mura i7 .....	81
Dell® Precision™ Workstation T3500 .....	81
Dell® Precision™ Workstation T3600 .....	81
Dell® Precision™ Workstation T3610.....	82
Delo Step-PC Professional VS-Series X79.....	82
Delo Step-PC Professional VS-Series Z77.....	83
Nijkerk (System MURA V1).....	85
Pyramid Multiplex R-19 Mura System.....	86
Pyramid Multiplex S Mura System.....	86
Seneca PrysmHD Plus.....	86
Seneca VWC-4.....	87
Synnex Canada Touch Mura X79 .....	91
Synnex Canada Touch Mura Z77 .....	92
Trenton TVC2404.....	93
Trenton TVC3400.....	94
Trenton TVC4400.....	95
Trenton TVC4403 with JXTS6966 .....	96
Trenton TVC4403 with TSB7053.....	98
Trenton TVC4406.....	100
Trenton TVC4502.....	101
Trenton TVC5401 (with JXTS6966 SHB) .....	101
Trenton TVC5401 (with TSB7053 SHB).....	104
Trenton TVC5402 .....	106
Trenton TVC5402 (with TKL8255 SHB) .....	108
<b>Validated motherboards .....</b>	<b>110</b>
Currently supported motherboards .....	110
Advantech ASMB-785G4-00A1E.....	110
Advantech ASMB-813I-00A1E .....	112
Advantech ASMB-815.....	114
Advantech PCE-5B12 BP with PCE-7129/PCE-5129 SHB .....	116
Advantech PCE-5B19/PCE-5128.....	118
Advantech PCE-5B19/PCE-5129 .....	121

Advantech PCE-5B19/PCE-7129 .....	124
ASUS® WS C422 PRO/SE .....	127
ASUS® WS C422 SAGE/10G .....	129
ASUS® WS C621E SAGE .....	131
ASUS® WS X299 SAGE .....	133
ASUS® WS Z390 PRO .....	135
GIGABYTE™ MW51-HP0 .....	137
MSI X299 SLI PLUS .....	139
Portwell® M9010A (with ROBO-8110A SHB) .....	141
Portwell® M9010A (with ROBO-8113-VG2AR SHB) .....	143
Portwell® M9010A (with ROBO-8113VG2AR-Q170-KBL SHB) .....	145
SUPERMICRO® C9Z390-PWG .....	147
SUPERMICRO® H11SS-i .....	149
<b>EOL (End of Life) motherboards .....</b>	<b>151</b>
ASUS® X99-A II .....	151
ASUS® X99-DELUXE II .....	153
ASUS® X99-E WS/USB 3.1 .....	155
ASUS® Z270-WS .....	157
Advantech ASMB-781G4-00A1E .....	159
Advantech ASMB-820I-00A1E .....	161
ASRock X79 Extreme 11 .....	163
ASUS® P6T7 WS .....	164
ASUS® P6X58-E WS .....	165
ASUS® P8Z77 WS .....	166
ASUS® P9X79 Pro .....	167
ASUS® P9X79-E WS .....	168
ASUS® P9X79 WS .....	169
ASUS® X99-A .....	170
ASUS® X99-DELUXE .....	171
ASUS® X99-E WS .....	173
ASUS® Z87 WS .....	174
GIGABYTE™ G1 Sniper3 .....	175
GIGABYTE™ GA-X79-UD3 .....	176
MSI® Big Bang-XPower .....	177
<b>Validated PCIe expansion boxes .....</b>	<b>178</b>
Currently supported PCIe expansion box .....	178
Magma ExpressBox 3T .....	178
<b>Validated chassis .....</b>	<b>179</b>
Currently supported chassis .....	179
Advantech ACP-4000MB-00XE .....	179
Advantech HPC-7400 .....	179
Advantech IPC-623 .....	179
Chenbro RM41300-FS81 .....	180
iStarUSA® D-400-2F80 .....	180
iStarUSA D-400L-7 .....	181
NORCO RPC-432 .....	182
Portwell 10 slot chassis .....	182
Rackmaster 20 slot chassis .....	182

SUPERMICRO® SuperChassis 842XTQ-R606B .....	183
EOL (End of Life) chassis.....	183
Advantech C-MAT1A-ACP4010-01 .....	183
Advantech IPC-7130-00XE.....	183
Delo Step Multi-View.....	184
Nijkerk NCS-R416A-MB-NOIR.....	184
SUPERMICRO® SuperChassis 836 .....	184
<b>System ventilation.....</b>	<b>185</b>
<b>Power supply sizing for Matrox Mura MPX Series based, C-Series based, and Third party based systems.</b>	<b>186</b>
Shipping an integrated system.....	186
<b>PCI Express® bandwidth considerations in Matrox Mura MPX Series based or C-Series based systems ...</b>	<b>187</b>
Input source bandwidth requirements.....	187
PCI Express architecture overview .....	188
General bandwidth guidelines.....	190
A word about system architectures.....	190
<b>Appendix .....</b>	<b>192</b>
Approved fans for iStarUSA® D-400-2F80 chassis .....	192
<b>Contact us .....</b>	<b>193</b>
<b>Disclaimer.....</b>	<b>194</b>

# Product overview

Matrox Mura MPX Series products combine input and output cards onto a single-slot PCIe® ×16 2.0 card. Mura MPX Series products feature universal input channel support for both digital and analog video (HD, DVI, RGB/VGA®, SDI, Component, S-video, and Composite). Mura MPX Series video capture cards work with output/input boards to provide additional analog video inputs.

Mura IPX Series products are PCIe ×8 Gen 2.0 cards that provide high-density capture, encode, and decode functionality to enhance video walls and operator workstations with advanced video processing and networking capabilities.


Matrox C-Series multi-display video cards, featuring six and nine-output models, allow you to drive multiple displays or projectors from a single graphics card. Designed and built to ensure excellent reliability, stability and ease of deployment, C-Series PCIe ×16 Gen 3.0 cards are ideal for demanding commercial and critical systems.

## Hardware summary – Mura MPX Series

The Matrox Mura MPX Series family of products includes the following key features:

- Maximum output resolution of 2048 × 1152 (DVI) and 2048 × 1536 (RGB/VGA) per display.
- Maximum input resolution of 2560 × 1600 @ 30 Hz (DVI), 2048 × 1536 @ 47 Hz (RGB/VGA), and 1920 × 1080 (Component) per input.
- Designed for control rooms, operation centers and other mission critical environments, as well as digital signage and presentation systems.
- Facilitates video switching, signal conversion, scaling, compositing, and de-interlacing from a single card.

### Mura MPX-4/4

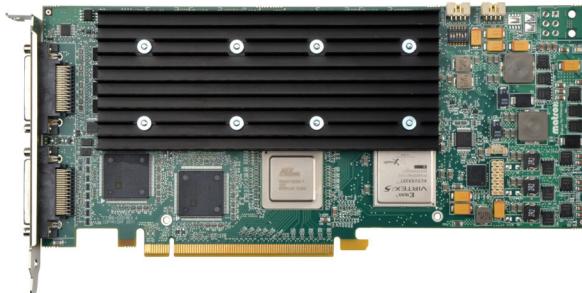

	Mura MPX-4/4
<b>Part number</b>	MURA-MPX44HF
<b>Card type</b>	PCIe ×16 2.0
<b>Form factor</b>	ATX
<b>Connectors</b>	2× KX20
<b>Memory</b>	2 GB DDR2
<b>Output support</b>	4
<b>Input support</b>	4
<b>Power consumption</b>	Typical: 37W @ 12V, 0.5W @ 3.3V or 37.5W Total Worst Case: 43W @ 12V, 0.5W @ 3.3V or 43.5W Total
<b>Weight</b>	298 g
<b>Dimensions</b>	L: 9.50 in / W: 0.75 in / H: 4.407 in L: 24.13 cm / W: 1.91 cm / H: 11.2 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Mura MPX-4/2



	<b>Mura MPX-4/2</b>
<b>Part number</b>	MURA-MPX42HF
<b>Card type</b>	PCIe x16 2.0
<b>Form factor</b>	ATX
<b>Connectors</b>	2x KX20
<b>Memory</b>	2 GB DDR2
<b>Output support</b>	4
<b>Input support</b>	2
<b>Power consumption</b>	Typical: 37W @ 12V, 0.5W @ 3.3V or 37.5W Total Worst Case: 43W @ 12V, 0.5W @ 3.3V or 43.5W Total
<b>Weight</b>	294 g
<b>Dimensions</b>	L: 9.50 in / W: 0.75 in / H: 4.407 in L: 24.13 cm / W: 1.91 cm / H: 11.2 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Mura MPX-4/0



	Mura MPX-4/0
<b>Part number</b>	MURA-MPX40HF
<b>Card type</b>	PCIe x16 2.0
<b>Form factor</b>	ATX
<b>Connector</b>	1x KX20
<b>Memory</b>	2 GB DDR2
<b>Output support</b>	4
<b>Input support</b>	0
<b>Power consumption</b>	Typical: 36W @ 12V, 0.5W @ 3.3V or 36.5W Total Worst Case: 41W @ 12V, 0.5W @ 3.3V or 41.5W Total
<b>Weight</b>	290 g
<b>Dimensions</b>	L: 9.50 in / W: 0.75 in / H: 4.407 in L: 24.13 cm / W: 1.91 cm / H: 11.2 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Mura MPX-V16



	Mura MPX-V16
<b>Part number</b>	MURA-MPXV16F
<b>Card type</b>	PCIe x4 1.0
<b>Form factor</b>	ATX
<b>Connectors</b>	2x DVI-I
<b>Memory</b>	256 MB DDR SDRAM
<b>Output support</b>	—
<b>Input support</b>	16 inputs
<b>Power consumption</b>	Maximum: 17W @ 12V
<b>Weight</b>	184 g
<b>Dimensions</b>	L: 8.10 in / W: 0.75 in / H: 4.376 in L: 20.6 cm / W: 1.91 cm / H: 11.1 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Mura MPX-V8



	Mura MPX-V8
<b>Part number</b>	MURA-MPXV8F
<b>Card type</b>	PCIe x4 1.0
<b>Form factor</b>	ATX
<b>Connector</b>	1x DVI-I
<b>Memory</b>	128 MB DDR SDRAM
<b>Output support</b>	—
<b>Input support</b>	8 inputs
<b>Power consumption</b>	Maximum: 10W @ 12V
<b>Weight</b>	158 g
<b>Dimensions</b>	L: 8.10 in / W: 0.75 in / H: 4.376 in L: 20.6 cm / W: 1.91 cm / H: 11.1 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Mura MPX-SDI




Mura MPX-SDI	
<b>Part number</b>	MURA-MPXSDIF
<b>Card type</b>	PCIe ×16 1.0
<b>Form factor</b>	ATX
<b>Connectors</b>	1× KX20, 2× DIN 1.0/2.3
<b>Memory</b>	1 GB DDR2
<b>Output support</b>	2
<b>Input support</b>	2
<b>Power consumption</b>	Typical: 20W @ 12V, 0.03W @ 3.3V or 20.03W Total
<b>Weight</b>	236 g
<b>Dimensions</b>	L: 6.60 in / W: 0.75 in / H: 4.407 in L: 16.80 cm / W: 1.91 cm / H: 11.2 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Hardware summary – Mura IPX Series

The Matrox Mura Series of products include the following key features:

- Multi-channel 4K/HD/SD encode and decode over standard IP
- DisplayPort™ and HDMI® capture, IP encode and IP decode support on a single card
- Flexible stream and record capabilities anywhere on the network
- Separate on-board network interface controller for zero impact on the system
- RGB 10:10:10 and 8:8:8 plus YUV 4:4:4, 4:2:2, and 4:2:0 color space support
- Ideal for control rooms, operation centers, board rooms and other mission critical environments as well as digital signage and presentation systems.

### MURAIPXI-E4SF/MURAIPXI-E4SHF

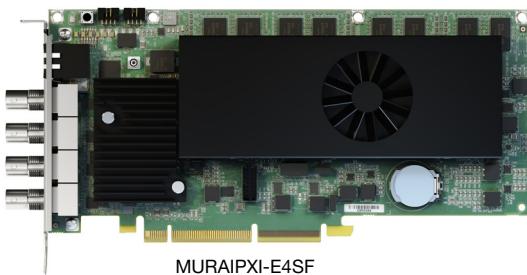


MURAIPXI-E4SF



MURAIPXI-E4SHF


	MURAIPXI-E4SF	MURAIPXI-E4SHF
<b>Part number</b>	MURAIPXI-E4SF	MURAIPXI-E4SHF
<b>Card type</b>	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	4x BNC 1x 100/1000 Base-T RJ45 Ethernet Port	4x BNC 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	4x BNC + IP	4x BNC + IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Power consumption</b>	Typical: 27.12W @ 12V, 6.27W @ 3.3V, or 33.39W Total	Typical: 27.12W @ 12V, 6.27W @ 3.3V, or 33.39W Total
<b>Weight</b>	398g	334g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPXI-E2MF/MURAIPXI-E2MHF

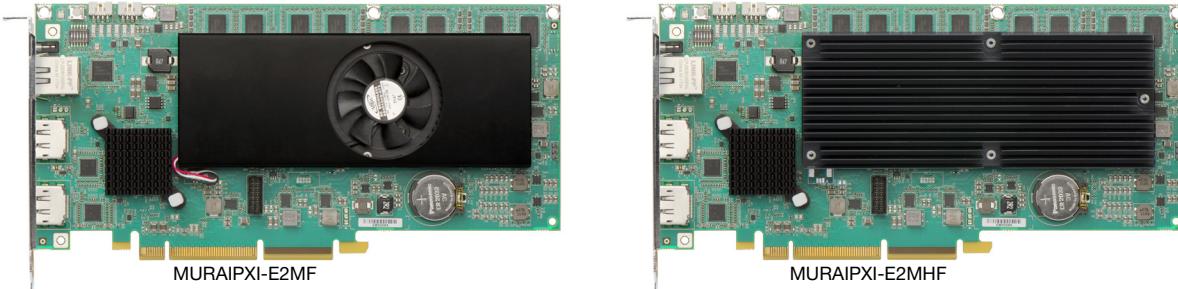


	<b>MURAIPXI-E2MF</b>	<b>MURAIPXI-E2MHF</b>
<b>Part number</b>	MURAIPXI-E2MF	MURAIPXI-E2MHF
<b>Card type</b>	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	2x DisplayPort 1.2 + IP	2x DisplayPort 1.2 + IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Power consumption</b>	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total
<b>Weight</b>	304g	268g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPXI-D2MF/MURAIPXI-D2MHF

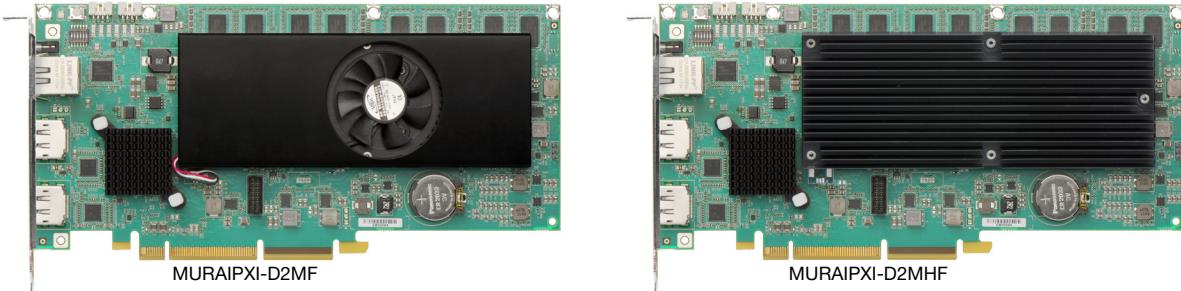


	<b>MURAIPXI-D2MF</b>	<b>MURAIPXI-D2MHF</b>
<b>Part number</b>	MURAIPXI-D2MF	MURAIPXI-D2MHF
<b>Card type</b>	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	2x DisplayPort 1.2 + IP	2x DisplayPort 1.2 + IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	—	—
<b>Power consumption</b>	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total
<b>Weight</b>	304g	268g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPXI-E4JF/MURAIPXI-E4JHF

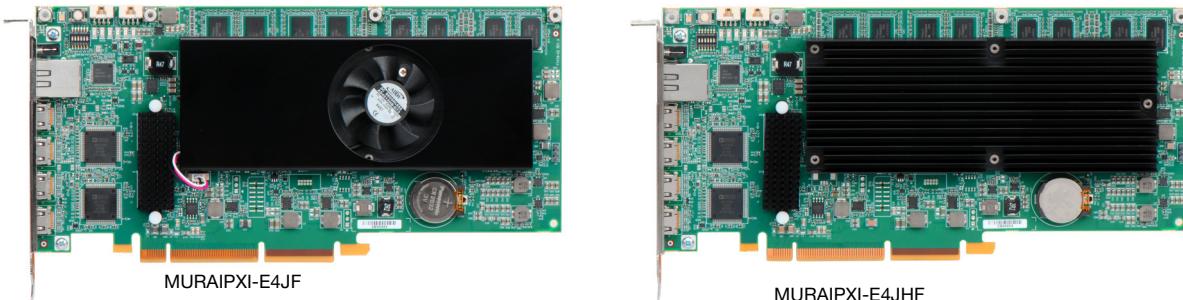

	<b>MURAIPXI-E4JF</b>	<b>MURAIPXI-E4JHF</b>
<b>Part number</b>	MURAIPXI-E4JF	MURAIPXI-E4JHF
<b>Card type</b>	PCIe ×16 2.0 (x8 2.0 electrically)	PCIe ×16 2.0 (x8 2.0 electrically)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	4x HDMI, IP	4x HDMI, IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Power consumption</b>	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total
<b>Weight</b>	312g	278g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPXI-D4JF/MURAIPXI-D4JHF

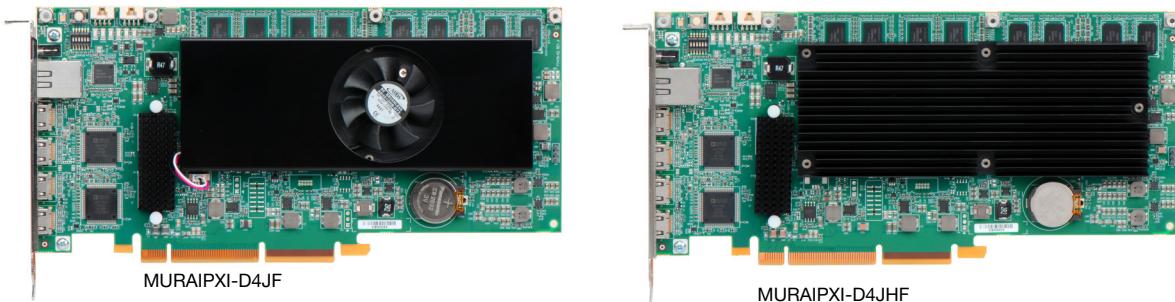

	<b>MURAIPXI-D4JF</b>	<b>MURAIPXI-D4JHF</b>
<b>Part number</b>	MURAIPXI-D4JF	MURAIPXI-D4JHF
<b>Card type</b>	PCIe ×16 2.0 (x8 2.0 electrically)	PCIe ×16 2.0 (x8 2.0 electrically)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	4 GB	4 GB
<b>Output support</b>	—	—
<b>Input support</b>	4x HDMI, IP	4x HDMI, IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	—	—
<b>Power consumption</b>	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total	Typical: 24.6W @ 12V, 6.105W @ 3.3V, or 30.705W Total
<b>Weight</b>	304g	268g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## Hardware summary – Matrox C-Series

The Matrox C-Series family of products includes the following key features:


- Pair up to two (2) C-Series for up to 18 synchronized outputs
- High-resolution monitor support, including Full HD and 4K/UHD
- **C900** – maximum resolution of 1920 × 1080 @ 60 Hz per output
- **C680** – maximum resolution of 3840 × 2160 @ 60 Hz for 3 outputs or 3840 × 2160 @ 30 Hz for 6 outputs
- Low-cost video wall integration with six and nine-output card options
- OpenGL® 4.4, OpenCL™ 1.2, and Microsoft® DirectX 12 support enables latest professional applications
- Support for the following operating systems:
  - All professional, embedded, and standard versions of Windows® 10 and 7
  - Window® Server® 2016, 2008 R2, 2012 R2
  - Linux®
- Ideal for control rooms, operation centers, board rooms, and other mission critical environments as well as digital signage and presentation systems

### Matrox C900



Matrox C900	
<b>Part number</b>	C900-E4GBF
<b>Card type</b>	PCIe ×16 3.0
<b>Form factor</b>	ATX
<b>Connector</b>	9x Mini HDMI
<b>Memory</b>	4 GB
<b>Output support</b>	9
<b>Input support</b>	—
<b>Power consumption</b>	75W Total
<b>Weight</b>	414g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.376 in L: 22.91 cm / W: 1.91 cm / H: 11.12 cm
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

## Matrox C680

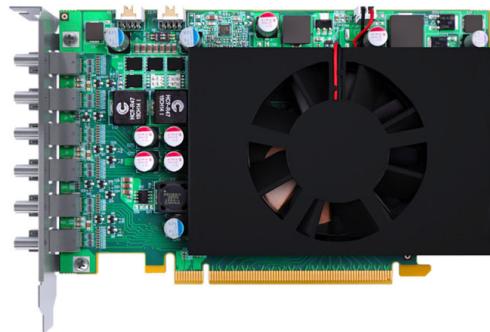

	Matrox C680
<b>Part number</b>	C680-E4GBF
<b>Card type</b>	PCIe x16 3.0
<b>Form factor</b>	ATX
<b>Connector</b>	6x Mini DisplayPort™
<b>Memory</b>	4 GB
<b>Output support</b>	6
<b>Input support</b>	—
<b>Power consumption</b>	50W Total
<b>Weight</b>	302g
<b>Dimensions</b>	L: 6.60 in / W: 0.75 in / H: 4.045 in L: 16.76 cm / W: 1.91 cm / H: 10.27 cm
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC

# Why choose a validated platform?

Matrox display wall products are designed for control rooms, operation centers, and other mission critical environments that require stable, reliable, and durable solutions. Matrox display wall products work in numerous non-validated, COTS motherboards and systems, but only a select few of these off-the-shelf solutions can be thoroughly tested, verified, and validated by Matrox. Choosing a validated platform guarantees a high-quality solution to drive your display wall system.

Some of the key benefits of using a Matrox-validated platform include:

- **Optimized Performance** – Carefully selected by Matrox to ensure better performance, a validated platform guarantees that your display wall product will work at or close to optimum performance.
- **Extensive Validation Process** – Systems are put to the test by Matrox Engineering, QA, Sales, and Marketing departments. From development and testing to sales and product demos, our employees use these systems in various practices to monitor performance. Using a validated platform guarantees the same level of performance experienced by Matrox staff.
- **Easier Deployment** – Using an already validated system takes the guesswork out of building a display wall system. Integrators can use a validated platform to quickly and easily deploy solutions across a wide range of project sizes.
- **Faster Customer Support** – Customer support is faster, easier, and more precise because our technical support team is already familiar with the validated system you're using.
- **Uncompromised Compatibility** – Using a validated platform ensures that your display wall product has been thoroughly tested and verified for uncompromised compatibility.
- **Improved Reliability** – Systems validated by Matrox have guaranteed thermal and ventilation characteristics, resulting in better product longevity.

## Platforms validated by Matrox

Matrox is constantly reviewing new systems and looking to validate new platforms across multiple price points. Any system suggestions are welcome. The following tables are summaries of the active list.

### Validated systems

Validated System	Maximum number of boards supported per system
<b>Advantech (AVS-540 with ASMB-815 MB)</b>	6
<b>Dell® Precision™ Rack 7910</b>	11
<b>Dell® Precision™ 5810 Tower Workstation</b>	4
<b>Dell® Precision™ 5820 Tower Workstation</b>	4
<b>HP® Z4 G4 Workstation</b>	4
<b>HP® Z420 Workstation</b>	3
<b>HP® Z440 Workstation</b>	4
<b>HP® Z6 G4 Workstation</b>	6
<b>HP® Z620 Workstation</b>	6
<b>HP® Z640 Workstation</b>	4
<b>HP® Z8 Workstation</b>	6
<b>InoNet Magnus-II</b>	2
<b>Lenovo ThinkStation P520</b>	4
<b>Portwell® M8030</b>	8
<b>Portwell® M9030 (with ROBO-8110A SHB)</b>	10

Validated System	Maximum number of boards supported per system
Portwell® M9030 (with ROBO-8113VG2AR SHB)	10
Portwell® M9030 (with ROBO-8113VG2AR-Q170-KBL SHB)	10
Seneca VWC-PLUS	7
Shuttle SH97R6	2

### Validated motherboards

Validated motherboard	Maximum number of boards supported per system
Advantech ASMB-785G4-00A1E	3
Advantech ASMB-813I-00A1E	6
Advantech ASMB-815	6
Advantech PCE-5B12 BP with PCE-7129/PCE-5129 SHB	11
Advantech PCE-5B19/PCE-5128	17
Advantech PCE-5B19/PCE-5129	16
Advantech PCE-5B19/PCE-7129	16
ASUS® WS C422 PRO/SE	4
ASUS® WS C422 SAGE/10G	7
ASUS® WS C621E SAGE	7
ASUS® WS X299 SAGE	7
ASUS® WS Z390 PRO	4
GIGABYTE™ MW51-HP0	7
MSI X299 SLI PLUS	4
Portwell® M9010A (with ROBO-8110A SHB)	10
Portwell® M9010A (with ROBO-8113-VG2AR SHB)	10
Portwell® M9010A (with ROBO-8113VG2AR-Q170-KBL SHB)	10
SUPERMICRO® C9Z390-PWG	4
SUPERMICRO® H11SS-i	4

### Validated PCIe expansion solution

Validated expansion solution	Maximum number of boards supported per system
Magma ExpressBox 3T	2

### Validated chassis

Validated chassis	Currently supported motherboards
Advantech ACP-4000MB-00XE	<ul style="list-style-type: none"> <li>▪ Advantech ASMB-815</li> </ul>
Advantech HPC-7400	<ul style="list-style-type: none"> <li>▪ Advantech ASMB-813I-00A1E</li> </ul>
Advantech IPC-623	<ul style="list-style-type: none"> <li>▪ Advantech PCE-5B19/PCE-5128</li> <li>▪ Advantech PCE-5B12/PCE-7127</li> <li>▪ Advantech PCE-5B12/PCE-5129</li> <li>▪ Advantech PCE-5B12/PCE-7129</li> <li>▪ Advantech PCE-5B19/PCE-5129</li> <li>▪ Advantech PCE-5B19/PCE-5127</li> <li>▪ Advantech PCE-7B17/PCE-7127</li> </ul>

Validated chassis	Currently supported motherboards
<b>Chenbro RM41300-FS81</b>	<ul style="list-style-type: none"> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS C422 SAGE/10G</li> <li>▪ ASUS® WS C621E SAGE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® WS Z390 PRO</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-DELUXE</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS/USB3.1</li> <li>▪ ASUS® Z270-WS</li> <li>▪ GIGABYTE™ MW51-HP0</li> <li>▪ MSI X299 SLI PLUS</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> <li>▪ SUPERMICRO® H11SSL-i</li> </ul>
<b>iStarUSA® D-400-2F80</b>	<ul style="list-style-type: none"> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS C422 SAGE/10G</li> <li>▪ ASUS® WS C621E SAGE</li> <li>▪ ASUS® WS X299 SAGE</li> <li>▪ ASUS® WS Z390 PRO</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-Deluxe</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS/USB3.1</li> <li>▪ ASUS® Z270-WS</li> <li>▪ GIGABYTE™ MW51-HP0</li> <li>▪ MSI X299 SLI PLUS</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> <li>▪ SUPERMICRO® H11SSL-i</li> </ul>
<b>iStarUSA D-400L-7</b>	<ul style="list-style-type: none"> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS C422 SAGE/10G</li> <li>▪ ASUS® WS C621E SAGE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® WS Z390 PRO</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS/USB3.1</li> <li>▪ ASUS® Z270-WS</li> <li>▪ GIGABYTE™ MW51-HP0</li> <li>▪ MSI X299 SLI PLUS</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> <li>▪ SUPERMICRO® H11SSL-i</li> </ul>
<b>NORCO RPC-432</b>	<ul style="list-style-type: none"> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS Z390 Pro</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> </ul>

Validated chassis	Currently supported motherboards
<b>Portwell 10 slot chassis</b>	<ul style="list-style-type: none"> <li>▪ PBPE-11A-MT (BP) / ROBO-8110A (SHB)</li> <li>▪ PBPE-11A-MT (BP) / ROBO-8113VG2AR (SHB)</li> </ul>
<b>Rackmaster 20 slot chassis</b>	<ul style="list-style-type: none"> <li>▪ Advantech PCE-5B19 (BP)/PCE-5128 (SHB)</li> <li>▪ Advantech PCE-5B19 (BP)/PCE-5129 (SHB)</li> <li>▪ Advantech PCE-5B19 (BP)/PCE-7129 (SHB)</li> <li>▪ Advantech PCE-5B12 (BP)/PCE-7127 (SHB)</li> <li>▪ Advantech PCE-5B12 (BP)/PCE-5129 (SHB)</li> <li>▪ Advantech PCE-5B12 (BP)/PCE-7129 (SHB)</li> </ul>
<b>SUPERMICRO® SuperChassis 842XTQ-R606B</b>	<ul style="list-style-type: none"> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-DELUXE</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS</li> <li>▪ ASUS® X99-E WS / ASUS® X99-E WS/USB 3.1</li> <li>▪ ASUS® Z270-WS</li> <li>▪ ASUS® Z87 WS</li> <li>▪ GIGABYTE™ MW51-HPO</li> <li>▪ MSI X299 SLI PLUS</li> </ul>

## C-Series system requirements

For C-Series based display walls (with or without Mura IPX Series cards), the demands and requirements of a system are more generic than for Mura MPX Series based display walls. To use as a C-Series based display wall, a system *must* meet the following requirements:

- The system must be properly ventilated and the Mura IPX Series and C-Series cards must not exceed the maximum allowed temperature. For more information, see “[System ventilation](#)”, page 185.
- A system with a QPI based architecture has poor peer-to-peer bandwidth. Support for intercard transfers should be limited to cards installed on the same segment of the QPI bus. It shouldn’t cross over the QPI bus due to limited bandwidth available over the QPI interface. For more information, see “[A word about system architectures](#)”, page 190.
- Mura IPX Series cards used in a non-validated system *must* have a fansink.

# Validated systems

The following systems have been validated by Matrox to work with Matrox Mura MPX Series, Mura IPX Series, C900, and C680 products.



**Note:** For Windows 7 installation, make sure your Mura system is in Legacy BIOS mode (MBR drive format). If your system came with UEFI mode (GPT drive format), make sure the Compatibility Support Module (CSM) is enabled to use the Legacy BIOS mode.

## Before you begin

To ensure optimal performance, read the following guidelines before installing your Matrox graphics hardware.

### Mura MPX Series based video wall system



**Note:** If graphics hardware is built into the motherboard of your system, you need to disable it in Windows® Device Manager on Mura MPX Series based video wall systems. For more information, see your system manual or Windows help.



**Note:** 7th generation desktop processors are unsupported for Mura MPX Series based controllers.



**Note:** Always insert your *Mura MPX-4/4, MPX-4/2, MPX-4/0*, and *Mura IPX Series* cards in the *PCIe® 2.0/3.0 ×16* slots ( $\times 16$  or  $\times 8$  electrical). All other Mura cards can be inserted in PCIe  $\times 4$  slots if no other PCIe  $\times 16$  slot is available.

Mura MPX Series based video wall system *MUST* use Matrox validated platforms.



**Note:** The ribbon cables for framlock are currently unsupported with Mura IPX Series.

- **Mura MPX-4/4, MPX-4/2, MPX-4/0, and Mura IPX Series** – Insert these cards in the PCIe  $\times 16$  slots that are  $\times 16/\times 8$  electrical.
- **Console display** – To add a console display to your Mura Series based system, you can use the following graphics cards in a PCIe  $\times 4, \times 8$ , or  $\times 16$  slot:
  - Matrox M9148 LP PCIe  $\times 16$  (P/N: M9148-E1024LAF)\*
  - Matrox M9140 LP PCIe  $\times 16$  (P/N: M9140-E512LAF)\*
  - Matrox M9138 LP PCIe  $\times 16$  (P/N: M9138-E1024LAF)\*
  - Matrox M9128 LP PCIe  $\times 16$  (P/N: M9128-E1024LAF)\*
  - Matrox M9125 PCIe  $\times 16$  (P/N: M9125-E512F)\*
  - Matrox M9120 Plus LP PCIe x16 (P/N: M9120-E512LPUF)\*
  - Matrox M9120 Plus LP PCIe x1 (P/N: M9120-E512LAU1F)\*
  - Matrox M9120 PCIe  $\times 16$  (P/N: M9120-E512F)\*
  - Matrox P690 PCIe  $\times 16$  (P/N: P69-MDDE128F)
  - Matrox P690 Plus LP PCIe  $\times 16$  (P/N: P69-MDDE256LAUF)
- **Mura MPX-V16, MPX-V8, and MPX-SDI** – Insert these cards in the PCIe  $\times 4$  slot.

\* Supported with Mura display wall drivers version 3.01 or later

## Supported configurations

- Multiple Mura MPX Series cards
- Multiple Mura MPX Series and multiple Mura IPX Series cards

## C900/C680 based video wall system



**Note:** Always insert your *C900* and *C680* in the *PCIe® 2.0/3.0 ×16* slots and your *Mura IPX Series* cards in the *PCIe® 2.0/3.0 ×16 or ×8* slots ( $\times 16$  or  $\times 8$  electrical). All other Mura cards can be inserted in *PCIe ×4* slots if no other *PCIe ×16* slot is available.



**Note:** To avoid possible problems, we recommend you use only Matrox PowerDesk software to change your display settings. Third party console displays can only be used in independent mode.



**Note:** The ribbon cables for framelock are currently unsupported with Mura IPX Series

- C-Series and Mura IPX Series – Insert these cards in the *PCIe ×16* slots that are  $\times 16/\times 8$  electrical.
- Console display – To add a console display to your C-Series based system, you can use the following graphics cards in a *PCIe ×4* slot:
  - Matrox M9148 LP PCIe ×16 (P/N: M9148-E1024LAF)
  - Matrox M9140 LP PCIe ×16 (P/N: M9140-E512LAF)
  - Matrox M9138 LP PCIe ×16 (P/N: M9138-E1024LAF)
  - Matrox M9128 LP PCIe ×16 (P/N: M9128-E1024LAF)
  - Matrox M9125 PCIe ×16 (P/N: M9125-E512F)
  - Matrox M9120 Plus LP PCIe ×16 (P/N: M9120-E512LPUF)
  - Matrox M9120 Plus LP PCIe ×1 (P/N: M9120-E512LAU1F)
  - Matrox M9120 PCIe ×16 (P/N: M9120-E512F)
  - Intel® HD Graphics 530 (onboard)
  - Intel® HD Graphics 630 (onboard)
  - NVIDIA® NVS 510
  - NVIDIA® NVS 310
  - NVIDIA® Quadro P400

## Supported configurations

- Up to 2 × C900
- Up to 2 × C900 and multiple Mura IPX Series capture cards
- Up to 2 × C680
- Up to 2 × C680 and multiple Mura IPX Series capture cards
- 1× C900 and 1× C680. In this configuration, the outputs between C900 and C680 cards aren't framlocked.
- 1× C900, 1× C680, and multiple Mura IPX Series capture cards. In this configuration, the outputs between C900 and C680 cards aren't framlocked.

## Third party based video wall system



**Note:** Always insert your *third party graphics hardware* in the *PCIe® 2.0/3.0 ×16* slots and your *Mura IPX Series* cards in the *PCIe® 2.0/3.0 ×16 or ×8* slots ( $\times 16$  or  $\times 8$  electrical).

### Supported configurations

- NVIDIA® M4000 + NVIDIA sync card + multiple Mura IPX Series 4K capture cards
- NVIDIA® M6000 + multiple Mura IPX Series 4K capture cards
- Intel® HD Graphics 530 graphics hardware + multiple Mura IPX Series 4K capture cards
- Intel® HD Graphics 630 graphics hardware + multiple Mura IPX Series 4K capture cards
- NVIDIA® P4000 + multiple Mura IPX series 4K capture cards
- NVIDIA® P5000 + multiple Mura IPX Series 4K capture cards
- NVIDIA® P6000 + multiple Mura IPX Series 4K capture cards
- AMD WX7100 + multiple Mura IPX Series 4K capture cards
- AMD WX9100 + multiple Mura IPX Series capture cards

For the latest list of supported third party graphics hardware, see the release notes for your Mura display wall driver.



**Note:** Optional power supply may be required for maximum support of third party graphics hardware.



**Note:** If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.



**Note:** Mura IPX Series cards leverage DirectX under Windows and OpenGL under Linux. Therefore, Matrox doesn't foresee any compatibility issues with other third party graphics brands and models or other configurations not mentioned above. Although Matrox strives to test a wide variety of setups and configurations of the most common use-cases, it's impossible to test all possible setups and configurations. If you're having any issues with the setup of your third party graphics + Mura IPX Series configuration, we recommend first removing all Mura IPX Series cards to verify the stability of the isolated third party graphics configuration. If you have any questions or a request for a specific brand and model to be tested, contact us at [DWCsupport@matrox.com](mailto:DWCsupport@matrox.com).

## Currently supported systems

The following validated systems are currently supported. For a list of systems that are EOL (End of Life), see page 57.

### Advantech (AVS-540 with ASMB-815 MB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	6				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	5				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	5				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASMB-815				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical, x8/x16 electrical)</li> <li>▪ 3 PCIe x8 3.0 slot (x8 mechanical, x8 electrical)</li> <li>▪ 1 PCIe x4 3.0 slot (x4 mechanical, x4 electrical)</li> </ul>				
<b>Chipset</b>	Intel C620				
<b>Processor</b>	Intel Xeon Scalable Processors (Xeon Silver / 4112 @ 2.6 GHz)				
<b>System memory</b>	16 GB DDR4 ECC-RDIMM 2400 MHz				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.75 X64 Project version: S8150000060X022				
<b>Power supply</b>	700W 80 plus single power supply				
<b>Chassis</b>	4U				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If you plan on using local USB keyboard/mouse, you must add a PCI USB controller. Using the onboard USB controller may result in erratic USB behavior.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ In the system BIOS, select <b>Socket Configuration</b> → <b>IIO Configuration</b>, change the following from <b>[Auto]</b> to <b>[x8x8]</b>: <ul style="list-style-type: none"> <li>▪ IOU0 (IIO PCIe Br1) [x8x8]</li> <li>▪ IOU1 (IIO PCIe Br2) [x8x8]</li> <li>▪ IOU2 (IIO PCIe Br3) [x8x8]</li> </ul> </li> <li>▪ In the system BIOS, select <b>Advanced</b> → <b>PCI Subsystem Settings</b>, make sure <b>Above 4G</b> is disabled.</li> <li>▪ With all slots populated, there could be a performance drop in the data transferred from a Mura IPX Series input to a graphics card. This may reduce the number of source frames successfully transferred from a Mura IPX Series input to a graphics card. For more information, please contact Matrox Display Wall Technical Support team at <a href="mailto:dwcsupport@matrox.com">dwcsupport@matrox.com</a>.</li> <li>▪ Installing full length cards on PCIEx4_SLOT2 and PCIEx8_SLOT3 will obstruct access to the SATA6 and SATA7 connectors on the motherboard.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console per system.


### Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEx1_Slot1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEx4_Slot2	Console Display	F	Console Display	E	Empty (Unusable)	

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX8_Slot3</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
<b>PCIEX16_Slot4</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCIEX8_Slot5</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_Slot6</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIEX8_Slot7</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

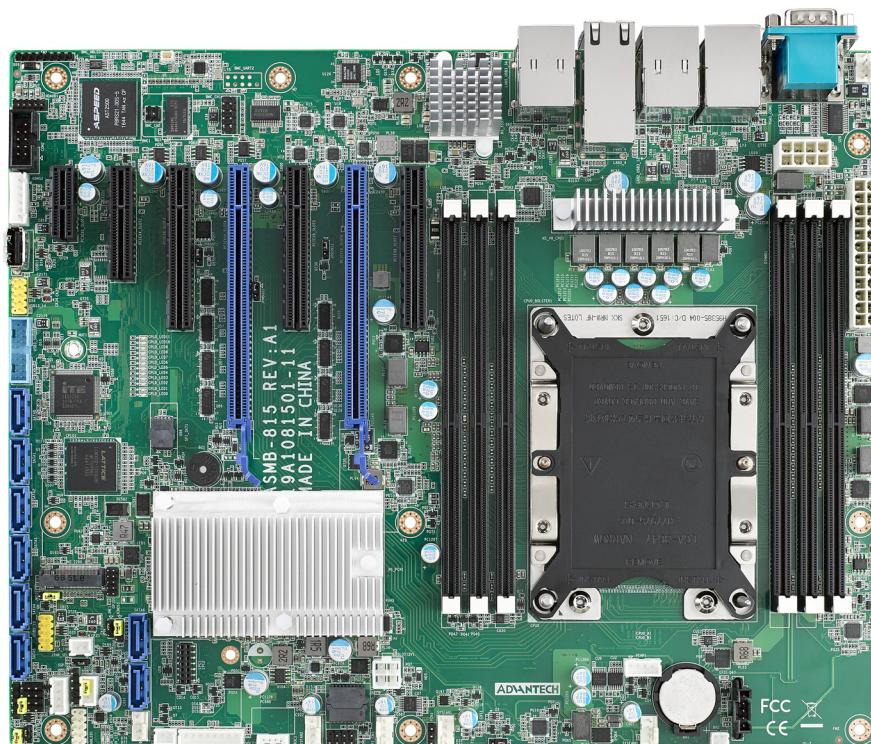

## Dell® Precision™ Rack 7910

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	3				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ <b>Riser 1:</b> <ul style="list-style-type: none"> <li>▪ Slot 1 – One half-height, low-profile ×8 link</li> <li>▪ Slot 2 – One half-height, low-profile ×8 link</li> <li>▪ Slot 3 – One half-height, low-profile ×8 link</li> </ul> </li> <li>▪ <b>Riser 2:</b> <ul style="list-style-type: none"> <li>▪ Slot 4 – One full-height, full-length ×16 link (Note: To use slots 1 to 4, make sure both processors are installed.)</li> <li>▪ Slot 5 – One full-height, full-length ×16 link</li> </ul> </li> <li>▪ <b>Riser 3 (Default):</b> <ul style="list-style-type: none"> <li>▪ Slot 6 – One full-height, full-length ×16 link</li> <li>▪ Slot 7 – One full-height, full-length ×16 link</li> </ul> </li> <li>▪ <b>Riser 3 (Alternate for GPU):</b> <ul style="list-style-type: none"> <li>▪ Slot 6 – One full-height, full-length ×16 link</li> </ul> </li> </ul>				
<b>Chipset</b>	Intel® C612				
<b>Processor</b>	Intel® Xeon® E5-2609 processor V3, 1.9 GHz				
<b>System memory</b>	8 GB DDR4				
<b>System BIOS version</b>	1.4.3				
<b>Power supply</b>	1100W				
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the two Mura MPX-4/4 cards in the slots labeled <b>SLOT6_G3_x8(CPU1)PCIe3x16</b> and <b>SLOT7_G3_x8(CPU1)</b> of Riser 3.</li> <li>▪ Insert the Mura MPX-V16 card in the slot labeled <b>SLOT5_G3_x8(CPU1)</b> of Riser2.</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, go to <b>Integrated Devices</b>, and set <b>Memory mapped I/O above 4GB</b> to <b>Disabled</b>.</li> <li>▪ To add the ribbon cables (for framelock), remove the plastic casing on the system close to the Mura MPX-4/4 cards. You can replace the plastic casing when you're done.</li> </ul>				

## Dell® Precision™ 5810 Tower Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	2				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>Chipset</b>	Intel® C612				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical and electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical, ×4 electrical)</li> <li>▪ 1 PCIe ×4 2.0 slot</li> <li>▪ 1 PCIe ×1 2.0 slot</li> </ul>				
<b>Processor</b>	Intel® Xeon® E5-1620 processor V3, 3.5 GHz				
<b>System memory</b>	8 GB DDR4				
<b>System BIOS version</b>	A06				
<b>Power supply</b>	685W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If the build date of your Mura MPX-4/4, MPX-4/2, or MPX-4/0 card is before March 1, 2015, your card requires a firmware update to work with this specific system. You can find the build date of your Mura card on the backside of the card and on the product box. Please contact DWC support to update your card, if applicable.</li> <li>▪ Due to mechanical conflict with RAM cooling cover, a full-length card can't be placed on the PCIe ×8 slot close to the RAM. If your console display is a full-length card, use PCIe ×4 slot instead</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
SLOT1_PCIE3x16	Console display	F	Console display	E	Empty	
SLOT2_PCIE3x16	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
SLOT3_PCIE2x1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
SLOT4_PCIE3x16	MURAIPXI-D4JF	A, C	Mura MPX-4/4	B, D	MURAIPXI-D4JF	A
SLOT5_PCIE2x4	Empty		Mura MPX-V8	D	Empty	
SLOT1_PCI	Empty		Empty		Empty	
<b>Option</b>	<b>Product</b>					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Dell® Precision™ 5820 Tower Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>Chipset</b>	Intel® C422				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical and electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical, ×8 electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Processor</b>	Intel® Xeon® W-2102 CPU, 3.5 GHz				
<b>System memory</b>	16 GB				
<b>System BIOS version</b>	Dell Inc. 1.11.1, 2019-04-24				
<b>Power supply</b>	425W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS → Thermal config, make sure the following are configured properly:           <ul style="list-style-type: none"> <li>▪ Thermal mode → Auto</li> <li>▪ PCIe Zone → at least 25%.</li> <li>▪ CPU/Memory Zone → at least 25%.</li> </ul> </li> <li>▪ In the system BIOS → Advanced Configurations → ASPM → Disabled.</li> <li>▪ No console support with C-Series controllers.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe3 X8_Slot1	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIe3 X16_Slot2	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIe3 X1_Slot3	Empty (Unusable)				Empty (Unusable)	
PCIe3 X16_Slot4	C680	A, C	Mura MPX-4/4	A, B, D	Third-party graphics hardware	A
PCIe3 X4_Slot5	Empty		Console display	E	Empty	
PCI_Slot6	Empty				Empty	
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## HP® Z4 G4 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	2 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	1 (Only console)				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical and electrical)</li> <li>▪ 1 PCIe x8 3.0 slots (x16 mechanical, x8 electrical)</li> <li>▪ 2 PCIe x4 3.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C422				
<b>Processor</b>	Intel® Xeon W-2135 CPU @ 3.70 GHz				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	P61 v01.61				
<b>Power supply</b>	750W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS → Advanced → Built-IN Device options → Increase idle fan speed → 100%.</li> </ul>				

\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe3X16_Slot1	C680	C	—	—	Third party graphics hardware	
PCIe3X4_Slot2	Console display	F	—	—	Empty (Unusable)	
PCIe3X16_Slot3	C680	A, C	—	—	Third party graphics hardware	A
PCIe3X4_Slot4	Empty (Unusable)		—	—	Empty (Unusable)	
PCIe3X8_Slot5	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 LP PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## HP® Z420 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	3				
<b>Available PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical and electrical)</li> <li>▪ 1 PCIe ×8 3.0 slot (×8 mechanical and electrical)</li> <li>▪ 1 PCIe ×8 2.0 slot (×8 mechanical, ×4 electrical)</li> <li>▪ 1 PCIe ×4 2.0 slot (×4 mechanical, ×1 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C602				
<b>Processor</b>	Intel® Xeon® E5-1607, 3.00 GHz Quad Core				
<b>System memory</b>	6 GB UDDR3				
<b>System BIOS version</b>	J61 V03.15				
<b>Power supply</b>	600W				
<b>Notes</b>	A ribbon cable is required to framelock two Mura cards (P/N: F16279-00). For more information, contact your Matrox representative.				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
1 PCIe2 x4 (1)	—		Empty		—	
2 PCIe3 x16	—		Mura MPX-4/4	B	—	
3 PCIe2 x8 (4)	—		Empty		—	
4 PCIe3 x8	—		Mura MPX-V16	D	—	
5 PCIe3 x16	—		Mura MPX-4/4	A, B	—	
6 PCI 32/33	—		Empty (Unusable)		—	
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## HP® Z440 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	3				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical and electrical)</li> <li>▪ 1 PCIe x8 3.0 slot (x16 mechanical, x8 electrical)</li> <li>▪ 1 PCIe x4 2.0 slot (x8 mechanical, x4 electrical)</li> <li>▪ 1 PCIe x1 2.0 slot (x4 mechanical, x1 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C612				
<b>Processor</b>	Intel® Xeon® CPU E5-1603 v3, 2.80 GHz				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	V02.34				
<b>Power supply</b>	700W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, go to <b>Settings</b> → <b>Power Management</b> → <b>Fan Speed Control</b>, then select <b>Medium</b>.</li> <li>▪ If your Mura MPX-4/4, MPX-4/2, or MPX-4/0 card build date is before March 1, 2015, your card requires a firmware update to work with this specific system. You can find the build date of your Mura card on the backside of the card and on the product box. Please contact DWC support to update your card, if applicable.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIe2 x1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIe3 x16</b>	C680	A, C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCIe2 x4</b>	Console display	F	Console display	E, D	Empty (unusable)	
<b>PCIe3 x8</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIe3 x16</b>	MURAIPXI-D4JF	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCI 32/33</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## HP® Z6 G4 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	6				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	5				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical and electrical)</li> <li>▪ 1 PCIe x8 3.0 slots (x16 mechanical, x8/x4 electrical)</li> <li>▪ 3 PCIe x4 3.0 slot</li> </ul>				
<b>Chipset</b>	Intel C622				
<b>Processor</b>	Intel Xeon Gold 5122 CPU @ 3.6 GHz				
<b>System memory</b>	16 GB RDDR4 ECC				
<b>System BIOS version</b>	P60 v01.42 02/26/2018				
<b>Power supply</b>	700W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, select <b>Advanced</b> → <b>Built-In Device options</b>, and make sure <b>Idle fan speed</b> is set to <b>100%</b>.</li> <li>▪ In the system BIOS, select <b>Advanced</b> → <b>System Options</b> → <b>PCIe MMIO Assignment mode</b>, then select <b>32 bit</b> with Mura MPX Series based controllers.</li> <li>▪ In the system BIOS, select <b>Advanced</b> → <b>System Options</b> → <b>PCIe MMIO Assignment mode</b>, then select <b>Auto</b> with C-Series or third party based controllers.</li> <li>▪ To ensure slot4 remains x8 electrical, don't install the SSD in the second M.2 slot.</li> </ul>				

\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe3 X4_Slot1	Empty (unusable)		Mura MPX-V8	D	Empty (Unusable)	
PCIe3 X16_Slot2	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIe3 X4_Slot3	Console display	F	Console display	D,E	Empty (Unusable)	
PCIe3 X8_Slot4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A,B,D	MURAIPXI-D4JF	A
PCIe3 X16_Slot5	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIe3 X4_Slot6	Empty (unusable)		Mura MPX-V8	D	Empty (unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680

Option	Product
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## HP® Z620 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	3				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots</li> <li>▪ 1 PCIe x8 3.0 slot</li> <li>▪ 1 PCIe x8 2.0 slot (x8 mechanical, x4 electrical)</li> <li>▪ 1 PCIe x4 2.0 slot (x4 mechanical, x1 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C602				
<b>Processor</b>	Intel® Xeon® E5-2640, 2.50 GHz				
<b>System memory</b>	12 GB ECC DDR3				
<b>System BIOS version</b>	V3.93				
<b>Power supply</b>	800W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ A ribbon cable is required to framelock two Mura cards (P/N: F16279-00). For more information, contact your Matrox representative.</li> <li>▪ To remove one of the two cards, remove the module that houses the second CPU. This module hides the board retaining clip.</li> </ul>				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
1 PCIe2 x4 (1)	—		Empty (Unusable)		—	
2 PCIe3 x16	—		Mura MPX-4/4	B	—	
3 PCIe2 x8 (4)	—		Console display		—	
4 PCIe3 x8	—		Mura MPX-V8	D, E	—	
5 PCIe3 x16	—		Mura MPX-4/4	A, B	—	
6 PCI 32/33	—		Empty (Unusable)		—	
<b>Option</b>	<b>Product</b>					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
<b>C</b>	C900 or C680					
<b>D</b>	Mura MPX-V16 or MPX-V8					
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## HP® Z640 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	4				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	3				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe 3.0 slots (x16 mechanical, x16 electrical)</li> <li>▪ 1 PCIe 3.0 slot (x16 mechanical, x8 electrical)</li> <li>▪ 1 PCIe 2.0 slot (x16 mechanical, x4 electrical)</li> <li>▪ 1 PCIe 2.0 slot (x16 mechanical, x1 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C612				
<b>Processor</b>	Intel® Xeon® E5-2640 v.3, 2.60 GHz, Dual CPU				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	v02.48				
<b>Power supply</b>	925W				
<b>Notes</b>	In the system BIOS, go to Advanced → Power Options. Under Thermal Options, set Fan Idle Mode to ***.				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe2 x1	Empty (unusable)		Empty (unusable)		Empty (unusable)	
PCIe3 x16	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
PCIe2 x4	Console display	F	Console display	E	Empty (unusable)	
PCIe3 x8	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIe3 x16	MURAIPXI-D4JF	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCI 32/33	Empty (unusable)		Empty (Unusable)		Empty (unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## HP® Z8 Workstation

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes (Requires 3.03 or later)	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	6				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	4 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	1 (only console)				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0 slots (×16 mechanical and electrical)</li> <li>▪ 1 PCIe ×8 3.0 slots (×16 mechanical, ×8/×4 electrical)</li> <li>▪ 2 PCIe ×4 3.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C622				
<b>Processor</b>	Intel® Xeon Gold 6146 Dual CPU @ 3.20 GHz				
<b>System memory</b>	32 GB DDR4 ECC Reg				
<b>System BIOS version</b>	P60 v01.71, 11/5/2018				
<b>Power supply</b>	1125W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, select <b>Advanced → Built-IN Device options</b>, then increase idle fan speed to 100%.</li> <li>▪ The second CPU must be populated for slot 3 and slot 6 to be available.</li> <li>▪ In the system BIOS, select <b>Advanced → Port Options</b>, then make sure <b>Serial Port A</b> is disabled.</li> </ul>				

\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe3 X8_Slot1	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
PCIe3 X16_Slot2	C680	C	—	—	Third party graphics hardware	—
PCIe3 X16_Slot3	MURAIPXI-D4JF	A	—	—	Third party graphics hardware	A
PCIe3 X16_Slot4	MURAIPXI-D4JF	A	—	—	Third party graphics hardware	A
PCIe3 X4_Slot5	Empty (unusable)	—	—	—	Empty (unusable)	—
PCIe3 X16_Slot6	C680	A, C	—	—	Third party graphics hardware	A
PCIe3 X4_Slot7	Console	F	—	—	Empty (unusable)	—

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680

Option	Product
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## InoNet Magnius-II

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	2				
<b>Motherboard</b>	Advantech ASMB-785G4-00A1E				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 2.0 slots</li> <li>▪ 1 PCIe x4 2.0 slot</li> <li>▪ 1 PCIe x1 2.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	Intel® Xeon® E3-1200 processor				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1.1				
<b>Power supply</b>	500W redundant				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1 card → ×16 (use the slot labeled <b>PCIE6</b>)</li> <li>▪ 2 cards → ×8 (switch to ×8 when slot labeled <b>PCIE4</b> is used)</li> </ul>				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCI1	—		Empty (Unusable)		—	
PCI2	—		Empty (Unusable)		—	
PCIE3	—		Mura MPX-V8	D	—	
PCIE4	—		Mura MPX-4/4	A, B, D	—	
PCI5	—		Empty (Unusable)		—	
PCIE6	—		Mura MPX-4/4	A, B, D	—	
<b>Option</b>	<b>Product</b>					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
<b>C</b>	C900 or C680					
<b>D</b>	Mura MPX-V16 or MPX-V8					
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## Lenovo ThinkStation P520

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots</li> <li>▪ 1 PCIe ×8 3.0 slot (open ended)</li> <li>▪ 2 PCIe ×4 3.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C422				
<b>Processor</b>	Intel® Xeon W 2123 CPU @ 3.60 GHz				
<b>System memory</b>	16 GB				
<b>System BIOS version</b>	Lenovo S03KT25A, 3/20/2019				
<b>Power supply</b>	690W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, select <b>POWER</b> → <b>Fan Control Stepping</b> → <b>7- Higher Fan Speed</b>.</li> <li>▪ In the system BIOS, select <b>ADVANCE</b> → <b>PCIE/PCI settings</b> → <b>M.2 Slot 1 status</b> → <b>PCIE Port</b> → <b>Disable</b>.</li> <li>▪ In the system BIOS, select <b>ADVANCE</b> → <b>PCIE/PCI settings</b> → <b>M.2 Slot 2 status</b> → <b>PCIE Port</b> → <b>Disable</b>.</li> <li>▪ <b>C-Series or third party based controllers</b> – In the system BIOS, select <b>STARTUP</b> → <b>CSM</b> → <b>Disable</b>.</li> <li>▪ <b>C-Series or third party based controllers</b> – In the system BIOS, select <b>ADVANCE</b> → <b>PCIE/PCI settings</b> → <b>Above 4G Decoding</b> → <b>Enable</b>.</li> <li>▪ <b>Mura MPX Series based controllers</b> – In the system BIOS, select <b>Boot Mode</b> → <b>Legacy only</b>.</li> <li>▪ <b>Mura MPX Series based controllers</b> – In the system BIOS, select <b>STARTUP</b> → <b>CSM</b> → <b>Enable</b>.</li> <li>▪ <b>Mura MPX Series based controllers</b> – In the system BIOS, select <b>STARTUP</b> → <b>CSM</b> → <b>Set Network, Storage, Video &amp; Other PCI devices</b> → <b>Legacy</b>.</li> <li>▪ <b>Mura MPX Series based controllers</b> – In the system BIOS, select <b>ADVANCE</b> → <b>PCIE/PCI settings</b> → <b>Above 4G Decoding</b> → <b>Disable</b>.</li> </ul>				

\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe3 X8_Slot1	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIe3 X16_Slot2	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIe3 X4_Slot3	Console display	F	Console display	E	Empty (unusable)	
PCIe3 X16_Slot4	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCI_Slot5	Empty (unusable)		Empty (unusable)		Empty (unusable)	
PCIe3 X4_Slot3	Empty (unusable)		Empty (unusable)		Empty (unusable)	

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Portwell® M8030

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	8				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	8				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>		See Notes for console support			
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>		Portwell PBPE-09A-MT (Backplane), ROBO-6911VG2AR (SHB)			
<b>PCIe expansion slots</b>		<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (x16 mechanical and electrical)</li> <li>▪ 6 PCIe ×16 3.0 slots (x16 mechanical, x8 electrical)</li> </ul>			
<b>Chipset</b>		Intel® C236			
<b>Processor</b>		Intel® i7-6700 CPU @ 3.40 GHz			
<b>System memory</b>		16 GB			
<b>System BIOS version</b>		90821T00 (2019/08/21)			
<b>Power supply</b>		950W Redundant			
<b>Chassis</b>		4U rackmount			
<b>Notes</b>		<ul style="list-style-type: none"> <li>▪ <b>C-Series based Controllers</b> – In the system BIOS, select Configuration → Graphics Configuration → Internal Graphics → Enable.</li> <li>▪ <b>Mura MPX Series based controllers</b> – <ul style="list-style-type: none"> <li>▪ In the system BIOS, select Configuration → Graphics Configuration → Internal Graphics → Disable.</li> <li>▪ In the system BIOS, select Configuration → Chipset Configuration → Above 4GB MMIO Bios assignment → Disabled.</li> <li>▪ In the system BIOS, select Boot Configuration → Boot option filter → Legacy only.</li> </ul> </li> <li>▪ Only onboard console support with C-Series based controller.</li> <li>▪ The system BIOS is available at <a href="ftp://pw_m8030:YXCN54Ek@privftp.matrox.com">ftp://pw_m8030:YXCN54Ek@privftp.matrox.com</a>.</li> </ul>			


\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
J2	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J6	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J7	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J8	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

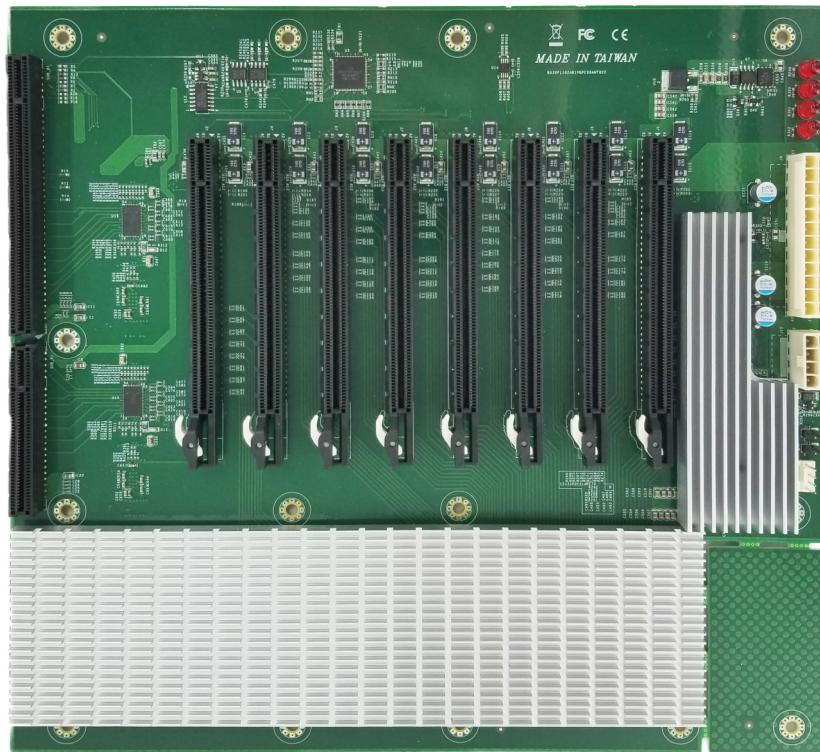

## Portwell® M9030 (with ROBO-8110A SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	10				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	9				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Portwell ROBO-8110A (SHB), PBPE-11A-MT (Backplane)				
<b>PCIe expansion slots</b>	10 PCIe ×16 2.0 slots (×16 mechanical and electrical)				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	Intel® Core™ i3-2120 dual-core processor or Intel® Xeon® E3-1200 Series quad-core processor				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1APBB 0.04 ×64				
<b>Chassis</b>	4U rackmount				
<b>Power supply</b>	950W redundant PSU				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional system memory upgrade is available.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
J2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J6	C680	A, C	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J7	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J8	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J9	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J10	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Portwell® M9030 (with ROBO-8113VG2AR SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	10				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	8				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Portwell ROBO-8113VG2AR (SHB) PBPE-11A-MT (Backplane)				
<b>PCIe expansion slots</b>	10 PCIe ×16 2.0 slots (×16 mechanical and electrical)				
<b>Chipset</b>	Intel® C236				
<b>Processor</b>	Intel® Core™ i3-6100 @3.7 GHz				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	R1.00.E0 (12/19/2019) - C-Series Controllers R1.00.E1 (01/28/2019) - Mura MPX Controllers				
<b>Chassis</b>	4U rackmount				
<b>Power supply</b>	950W redundant PSU				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional system memory upgrade is available.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Mura MPX Controllers: The system BIOS is available at <a href="ftp://PortwellBIOS:RVHdu3GW@privftp.matrox.com">ftp://PortwellBIOS:RVHdu3GW@privftp.matrox.com</a>.</li> <li>▪ C-Series Controllers: The system BIOS is available at <a href="ftp://portwell_bios:xQGnkWnQ@privftp.matrox.com">ftp://portwell_bios:xQGnkWnQ@privftp.matrox.com</a>.</li> <li>▪ Portwell system BIOS files with “-MT” are custom BIOS versions specific to Matrox configurations.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
J2	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J6	C680	A, C	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J7	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J8	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J9	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J10	MURAIPXI-D4JF	A, F	Mura MPX-4/4	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

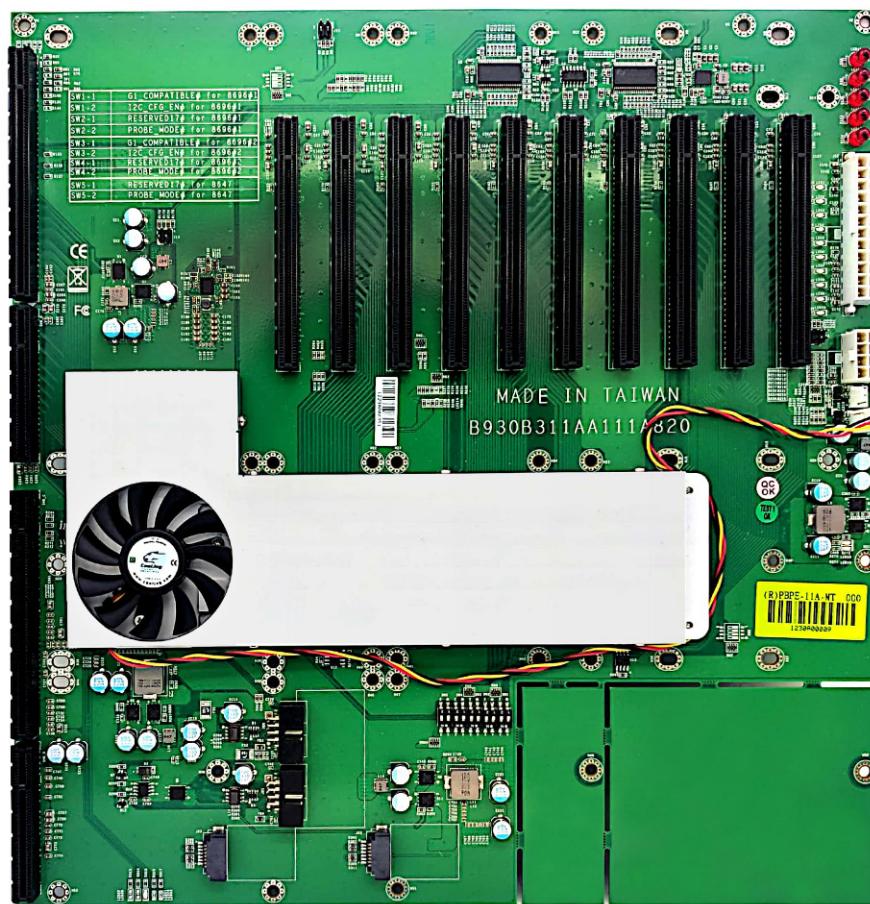

## Portwell® M9030 (with ROBO-8113VG2AR-Q170-KBL SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	10				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	9 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	See note for console support				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Portwell PBPE-11A-MT (Backplane) Portwell ROBO-8113VG2AR-Q170-KBL-PCIE4 (SHB)				
<b>PCIe expansion slots</b>	10 PCIe ×16 2.0 slots (×16 mechanical and electrical)				
<b>Chipset</b>	Intel® Q170				
<b>Processor</b>	Intel® Core™ i7-7700 CPU @3.6 GHz				
<b>System memory</b>	16 GB				
<b>System BIOS version</b>	R1.00.E0 (12/19/2019)				
<b>Chassis</b>	4U rackmount				
<b>Power supply</b>	950W redundant PSU				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional system memory upgrade is available.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ In the system BIOS → Advanced → Graphics Configuration → Internal Graphics → select Disabled.</li> <li>▪ In the system BIOS → Advanced → Chipset Configuration → Above 4G Decoding → select Disabled.</li> <li>▪ In the system BIOS → Advanced → Chipset Configuration → Above 4G MMIO BIOS Assignment → select Disabled.</li> <li>▪ No console support with C-Series controller.</li> <li>▪ The system BIOS is available at <a href="ftp://portwell_bios_q170:rPDP2h1D@privftp.matrox.com">ftp://portwell_bios_q170:rPDP2h1D@privftp.matrox.com</a>.</li> <li>▪ Portwell system BIOS files with “-MT” are custom BIOS versions specific to Matrox configurations.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C			Third party graphics hardware	
J2	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A
J3	MURAIPXI-D4JF	A			Third party graphics hardware	A
J4	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A
J5	MURAIPXI-D4JF	A			Third party graphics hardware	A
J6	C680	A, C			MURAIPXI-D4JF	A
J7	MURAIPXI-D4JF	A			Third party graphics hardware	A
J8	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J9	MURAIPXI-D4JF	A			Third party graphics hardware	A
J10	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A
<b>Option</b>	<b>Product</b>					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
<b>C</b>	C900 or C680					
<b>D</b>	Mura MPX-V16 or MPX-V8					
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## Motherboard layout

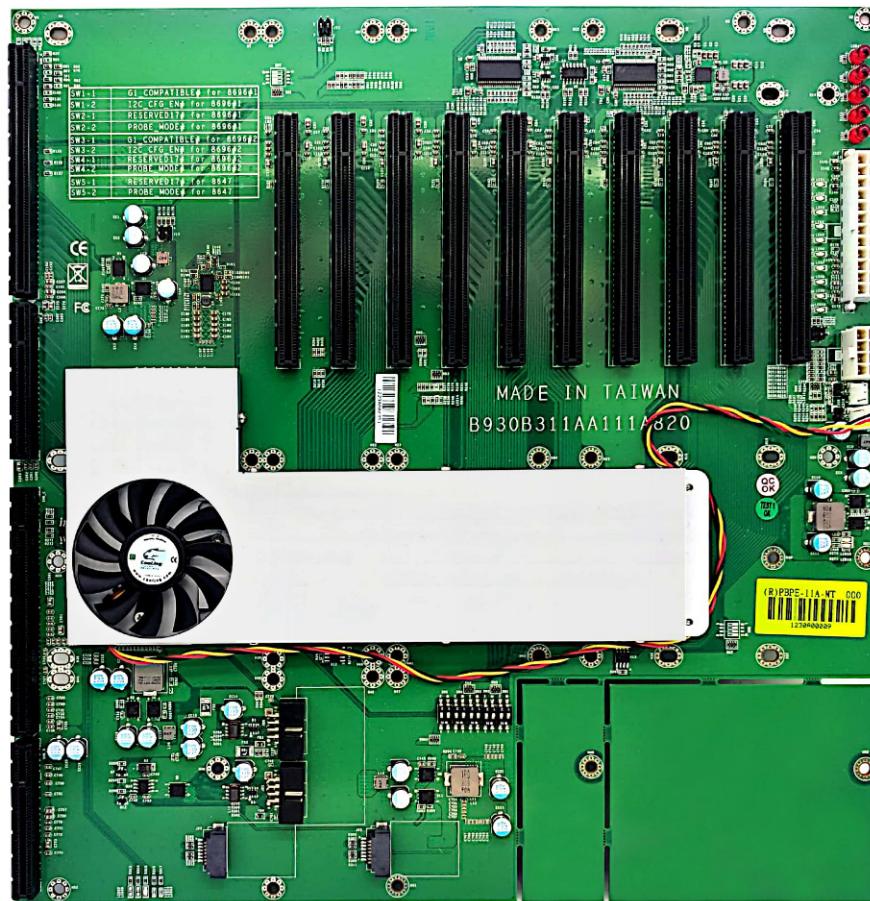

## Seneca VWC-PLUS

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Part number</b>	VWC-PLUS				
<b>Maximum number of cards supported</b>	7				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	7				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASUS® X99-E WS/USB 3.1				
<b>PCIe expansion slots</b>	7 PCIe ×16 3.0/2.0 slots				
<b>Chipset</b>	Intel® X99				
<b>Processor</b>	Intel® Core™ i7-5930K, 3.5 GHz/i7-6850K, 3.6 GHz				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	3601				
<b>Power supply</b>	860W				
<b>Chassis</b>	4U				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, go to <b>Advanced Mode</b> → <b>Boot</b>, then set <b>Above 4G Decoding</b> to <b>Disabled</b>.</li> <li>▪ The system BIOS is available at <a href="ftp://asusbios:9lwMwTaD@privftp.matrox.com">ftp://asusbios:9lwMwTaD@privftp.matrox.com</a>.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	A
PCIEX16_2	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIEX16_4	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIEX16_6	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_7	MURAIPXI-D4JF	A, F	Console display	E, D	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680

Option	Product
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Shuttle SH97R6

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	No	No foreseeable compatibility issues	No	No foreseeable compatibility issues
<b>Part number</b>	SH97R6				
<b>Maximum number of cards supported</b>	2				
<b>Motherboard</b>	SH97R6				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 1 PCIe x16 slot</li> <li>▪ 1 PCIe x4 slot</li> </ul>				
<b>Chipset</b>	Intel® H97				
<b>Processor</b>	Intel® Core™ i7 4790, 3.6 GHz				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1.04				
<b>Power supply</b>	300W				
<b>Chassis</b>	Mini server				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe x16	—		Mura MPX-4/4	B	—	
PCIe x4	—		Mura MPX-V16	D	—	
<b>Option</b>		<b>Product</b>				
<b>A</b>		MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF				
<b>B</b>		Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI				
<b>C</b>		C900 or C680				
<b>D</b>		Mura MPX-V16 or MPX-V8				
<b>E</b>		Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)				
<b>F</b>		Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)				

## End of Life (EOL) systems

### Advantech (AVS-240)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	3				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	2				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	1				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Advantech ASMB-820				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×16 and ×8 electrical)</li> <li>▪ 1 PCIe ×4 2.0 slot (×4 mechanical, ×4 electrical)</li> <li>▪ 1 PCIe ×1 2.0 slot (×1 mechanical, ×1 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C602J				
<b>Processor</b>	Intel® Xeon® E5-2420 processor				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1.1				
<b>Power supply</b>	80 PLUS 500W PSU				

\* Maximum of 1 console display per system.


### Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCI	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCI	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE3	Empty (Unusable)		Mura V16	D	Empty (Unusable)	
PCIE4	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIE5	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE6	MURAIPXI-D4JF	A, C, F	Mura MPX-4/4	A, B, E	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

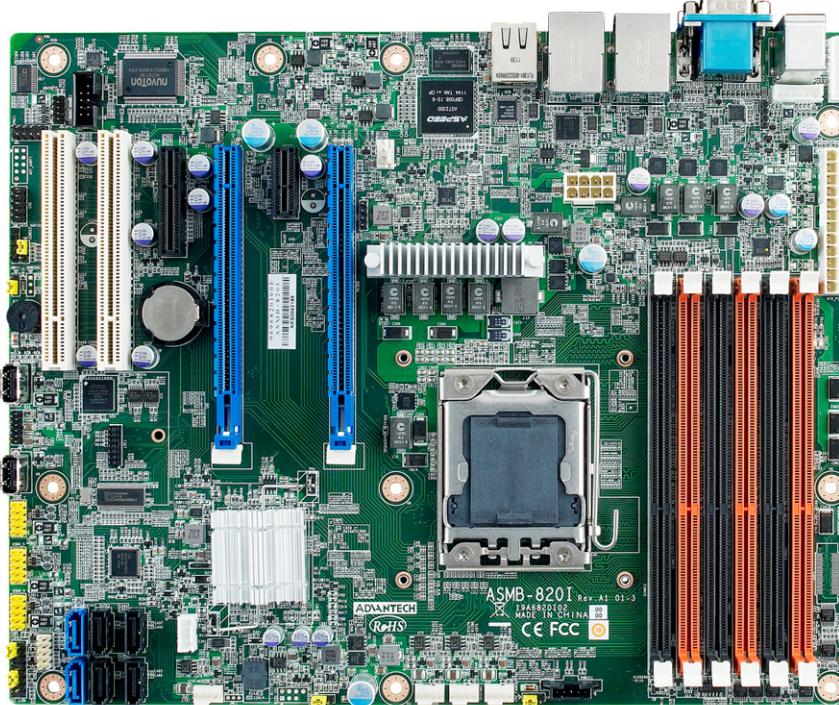

## Advantech (AVS-290)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	3				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	2				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Advantech ASMB-781G4-00A1E				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 2.0 slots (x16 mechanical, x16 and x8 electrical)</li> <li>▪ 1 PCIe ×4 2.0 slot</li> <li>▪ 1 PCIe ×1 2.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	Intel® Xeon® E3-1200 processor				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1.1				
<b>Power supply</b>	400W				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1 card → ×16</li> <li>▪ 2 cards → ×8</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCI1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCI2	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE3	Empty (Unusable)		Mura MPX-V8	D, E	Empty (Unusable)	
PCIE4	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCI5	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE6	MURAIPXI-D4JF	A, C, F	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## Advantech (AVS-540 with ASMB-822I MB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	6				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	5				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	5				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASMB-822I				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical, x16 and x8 electrical)</li> <li>▪ 3 PCIe x16 3.0 slots (x16 mechanical, x8 electrical)</li> <li>▪ 1 PCIe x8 slot (x8 mechanical, x4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C602J				
<b>Processor</b>	Intel® Xeon® E5-2600 Series				
<b>System memory</b>	4 GB DDR3 1333 MHz, up to 96 GB DDR3 1600 MHz				
<b>System BIOS version</b>	V1.10				
<b>Power supply</b>	<p>700W 80 plus single power supply            Optional power supply required for maximum support of third party graphics hardware.</p>				
<b>Chassis</b>	4U				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If you plan on using local USB keyboard/mouse, you must add a PCIe USB controller to one of the available PCIe x16 slots. Using the onboard USB controller may result in erratic USB behavior.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ With all slots populated, there could be a performance drop in the data transferred from a Mura IPX Series input to a graphics card. This may reduce the number of source frames successfully transferred from a Mura IPX Series input to a graphics card. For more information, please contact Matrox Display Wall Technical Support team at <a href="mailto:dwcsupport@matrox.com">dwcsupport@matrox.com</a>.</li> <li>▪ The chassis fan must remain at full speed.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>1 (PCI)</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>2 (PCIe)</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Empty (Unusable)	
<b>3 (PCIe)</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>4 (PCIe)</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>5 (PCIe)</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>6 (PCIe)</b>	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>7 (PCIe)</b>	Console display	F	Mura MPX-V16	D, E	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

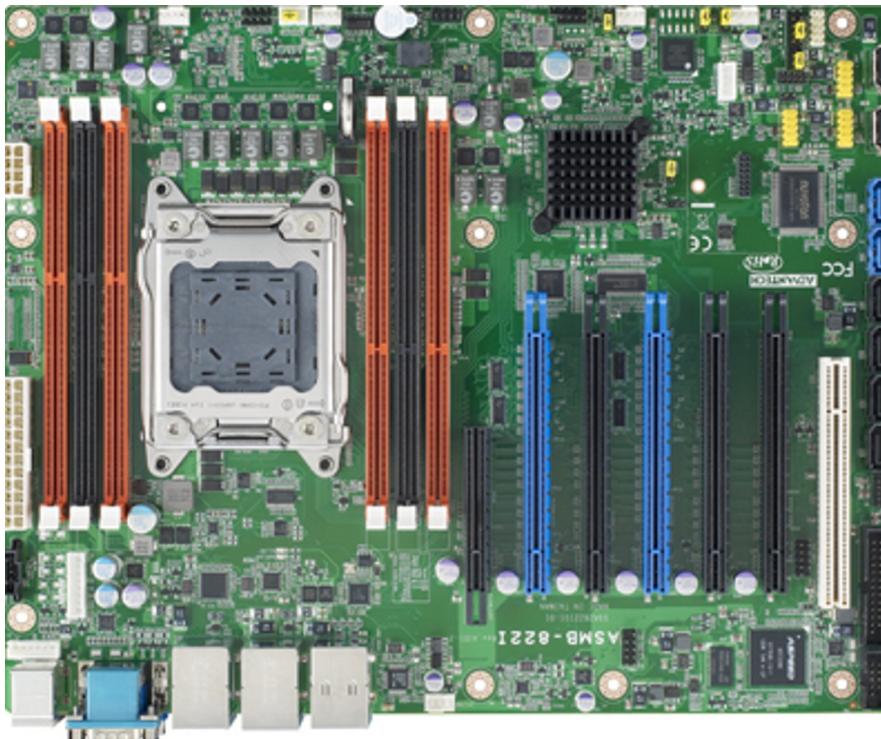

## Advantech (AVS-541)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	15				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	5				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	14				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7127 (SHB), PCE-7B17-00A1E (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 5 PCIe ×16 3.0 slots (x16 mechanical, x8 electrical)</li> <li>▪ 6 PCIe ×16 3.0 slots (x16 mechanical, x4 electrical)</li> <li>▪ 3 PCIe ×4 3.0 slots</li> <li>▪ 1 PCIe ×4 2.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C216				
<b>Processor</b>	Intel® Xeon® E3-1275 V2, 3.50 GHz				
<b>System memory</b>	4 GB DDR3, 1333 MHz				
<b>System BIOS version</b>	V1.10				
<b>Power supply</b>	810W redundant				
<b>Chassis</b>	4U				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ The chassis fan must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PPCIEX4_1	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P1PCIEX8_1	MURAIPXI-D4JF	A	Mura MPX-4/4	B	MURAIPXI-D4JF	A
P1PCIEX4_3	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P1PCIEX4_4	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P1PCIEX8_2	MURAIPXI-D4JF	A	Mura MPX-4/4	B, D	Third party graphics hardware	A
P1PCIEX4_5	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P1PCIEX4_6	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P1PCIEX8_3	C680	C	Mura MPX-4/4	B, D	Third party graphics hardware	
P2PCIEX4_1	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P2PCIEX4_2	Console	F	Mura MPX-V8	D	Empty (Unusable)	
P2PCIEX4_3	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P2PCIEX8_1	C680	A, C	Mura MPX-4/4	B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P2PCIEX4_4	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P2PCIEX4_5	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
P2PCIEX8_2	MURAIPXI-D4JF	A	Mura MPX-4/4	B, D, E	MURAIPXI-D4JF	A
P2PCIEX4_6	Empty		Empty		Empty	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Advantech (AVS-840)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes (Requires Mura drivers version 2.09 or newer)	Yes (Requires Mura drivers version 2.09 or newer)	No foreseeable compatibility issues

<b>Maximum number of cards supported</b>	11
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10
<b>Maximum supported C900/C680</b>	2
<b>Motherboard</b>	PCE-7127/PCE-5128 (SHB), PCE-5B12-00A1 (Backplane)
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>
<b>Chipset</b>	<ul style="list-style-type: none"> <li>▪ Intel® C216 (PCE-7127)</li> <li>▪ Intel® Q87 (PCE-5128)</li> </ul>
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ Intel® Xeon® E3-1275 V2, 3.50 GHz (PCE-7127)</li> <li>▪ Intel® Core™ i7-4770S, 3.10 GHz (PCE-5128)</li> </ul>
<b>System memory</b>	4 GB DDR3, 1333 MHz
<b>System BIOS version</b>	<ul style="list-style-type: none"> <li>▪ Core version: 4.6.5.3 0.18 x64 (PCE-7127) Project version: PCE 7127X005</li> <li>▪ Core version: 4.6.5.4 0.35 x64 (PCE-5128) Project version: PCE 5128XH01</li> </ul>

<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ 810W redundant Optional power supply required for maximum support of third party graphics hardware:</li> <li>▪ Optional single power supply: <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul> </li> </ul>
<b>Chassis</b>	<p>4U rack mount</p> <ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE (for single power supply)</li> <li>▪ Chassis Part#: IPC-623BP-00RBE (for redundant power supply)</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If you're inserting a P690 card (to use as a console display) in the slot labeled <b>PPCIEx4_1</b>, make sure the PCIe root port 1 of the ASPM settings is disabled. To disable ASPM, in the system BIOS, go to <b>Advanced → PCI Subsystem Settings → PCI Express Settings → ASPM Support</b>.</li> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber cushions into the notches of the hold down clamp and adjust the rubber cushions to secure the cards into position. The rubber cushions protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Choose a power cord with an IEC C19 plug for chassis IPC-623BP-1KZC</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIE16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIE16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIE16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P1PCIE16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIE16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIE16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIE16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIE16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIE16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIE16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEx4_1	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout



## Advantech (AVS-840 with PCE-5129 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-5129 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® Q170				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.20 x64 Project version: 5129000QF60F201				
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ 810W redundant Optional power supply required for maximum support of third party graphics hardware:</li> <li>▪ Optional single power supply: <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul> </li> </ul>				
<b>Chassis</b>	4U rack mount				
	<ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE (for single power supply)</li> <li>▪ Chassis Part#: IPC-623BP-00RBE (for redundant power supply)</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber cushions into the notches of the hold down clamp and adjust the rubber cushions to secure the cards into position. The rubber cushions protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Choose a power cord with an IEC C19 plug for chassis IPC-623BP-1KZC</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIE16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIE16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIE16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

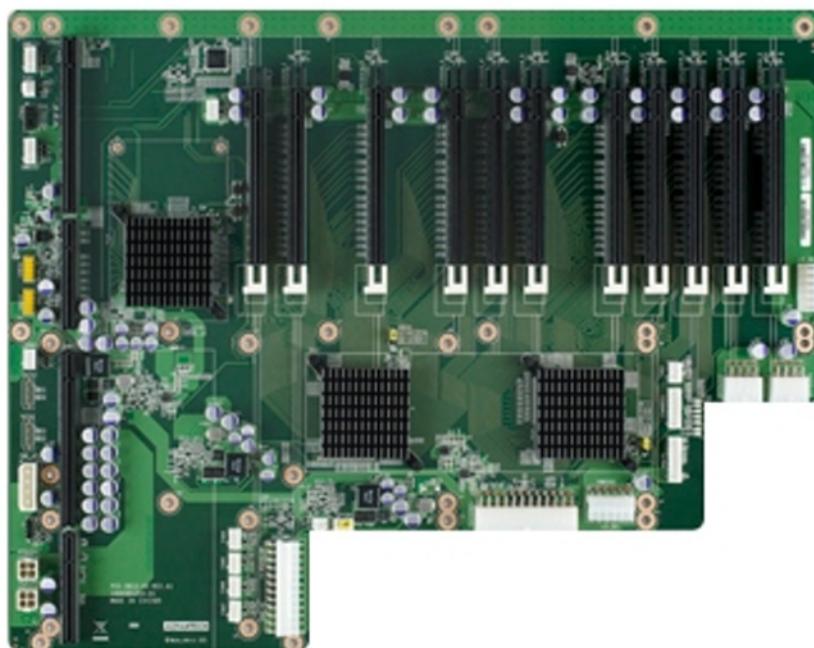

## Advantech (AVS-840)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes (Requires Mura drivers version 2.09 or newer)	Yes (Requires Mura drivers version 2.09 or newer)	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7127/PCE-5128 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	<ul style="list-style-type: none"> <li>▪ Intel® C216 (PCE-7127)</li> <li>▪ Intel® Q87 (PCE-5128)</li> </ul>				
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ Intel® Xeon® E3-1275 V2, 3.50 GHz (PCE-7127)</li> <li>▪ Intel® Core™ i7-4770S, 3.10 GHz (PCE-5128)</li> </ul>				
<b>System memory</b>	4 GB DDR3, 1333 MHz				
<b>System BIOS version</b>	<ul style="list-style-type: none"> <li>▪ Core version: 4.6.5.3 0.18 x64 (PCE-7127) Project version: PCE 7127X005</li> <li>▪ Core version: 4.6.5.4 0.35 x64 (PCE-5128) Project version: PCE 5128XH01</li> </ul>				
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ 810W redundant Optional power supply required for maximum support of third party graphics hardware:</li> <li>▪ Optional single power supply: <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul> </li> </ul>				
<b>Chassis</b>	<p>4U rack mount</p> <ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE (for single power supply)</li> <li>▪ Chassis Part#: IPC-623BP-00RBE (for redundant power supply)</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If you're inserting a P690 card (to use as a console display) in the slot labeled <b>PPCIEx4_1</b>, make sure the PCIe root port 1 of the ASPM settings is disabled. To disable ASPM, in the system BIOS, go to <b>Advanced → PCI Subsystem Settings → PCI Express Settings → ASPM Support</b>.</li> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber cushions into the notches of the hold down clamp and adjust the rubber cushions to secure the cards into position. The rubber cushions protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Choose a power cord with an IEC C19 plug for chassis IPC-623BP-1KZC</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P1PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout



## Advantech (AVS-840 with PCE-7129 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7129 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C236				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.20 x64 Project version: 7129000CF60E201				
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ 810W redundant Optional power supply required for maximum support of third party graphics hardware:</li> <li>▪ Optional single power supply: <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul> </li> </ul>				
<b>Chassis</b>	4U rack mount				
	<ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE (for single power supply)</li> <li>▪ Chassis Part#: IPC-623BP-00RBE (for redundant power supply)</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber cushions into the notches of the hold down clamp and adjust the rubber cushions to secure the cards into position. The rubber cushions protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Choose a power cord with an IEC C19 plug for chassis IPC-623BP-1KZC</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout



## Advantech (AVS-860)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes (Requires Mura drivers version 2.09 or newer)	Yes (Requires Mura drivers version 2.09 or newer)	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7127/PCE-5128 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	<ul style="list-style-type: none"> <li>▪ Intel® C216 (PCE-7127)</li> <li>▪ Intel® Q87 (PCE-5128)</li> </ul>				
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ Intel® Xeon® E3-1275 V2, 3.50 GHz (PCE-7127)</li> <li>▪ Intel® Core™ i7-4770S, 3.10 GHz (PCE-5128)</li> </ul>				
<b>System memory</b>	4 GB DDR3, 1333 MHz				
<b>System BIOS</b>	<ul style="list-style-type: none"> <li>▪ Core version: 4.6.5.3 0.18 x64 (PCE-7127) Project version: PCE 7127X005</li> <li>▪ Core version: 4.6.5.4 0.35 x64 (PCE-5128) Project version: PCE 5128XH01</li> </ul>				
<b>Power supply</b>	800W redundant Optional power supply required for maximum support of third party graphics hardware.				
<b>Chassis</b>	6U rack mount				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If you're inserting a P690 card (to use as a console display) in the slot labeled <b>PPCIE4_1</b>, make sure the PCIe root port 1 of the ASPM settings is disabled. To disable ASPM, in the system BIOS, go to <b>Advanced → PCI Subsystem Settings → PCI Express Settings → ASPM Support</b>.</li> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber foot to secure the cards into position. It's there to protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>P1PCIEX16_1</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>P1PCIEX16_2</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>P1PCIEX16_3</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
<b>P1PCIEX16_4</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
<b>P1PCIEX16_5</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

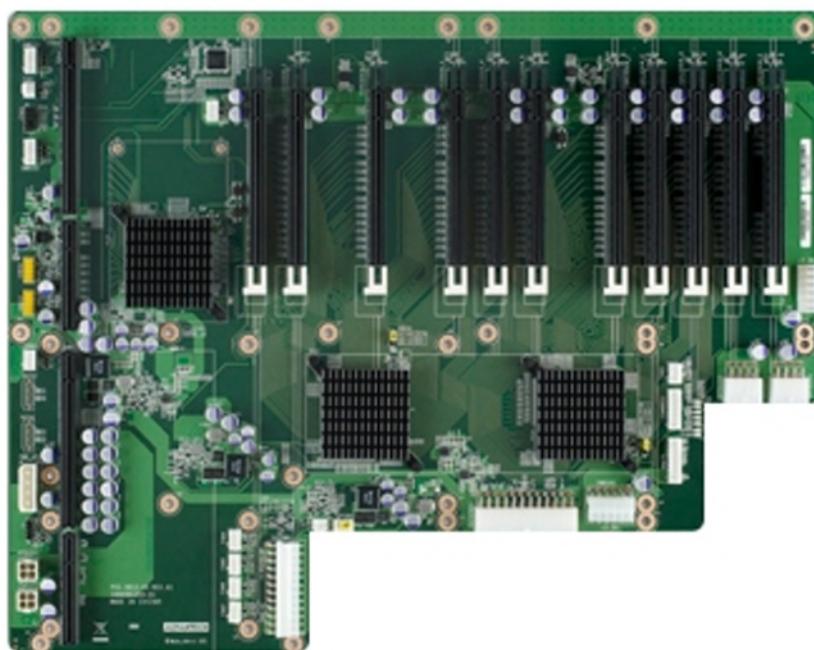

## Advantech (AVS-860 with PCE-5129 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-5129 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® Q170				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	Core version: 5.0.1.2.0.20 ×64 Project version: 5129000QF60F201				
<b>Power supply</b>	800W redundant Optional power supply required for maximum support of third party graphics hardware.				
<b>Chassis</b>	6U rack mount				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber foot to secure the cards into position. It's there to protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P1PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console display	E	Empty (Unusable)	
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

### Motherboard layout

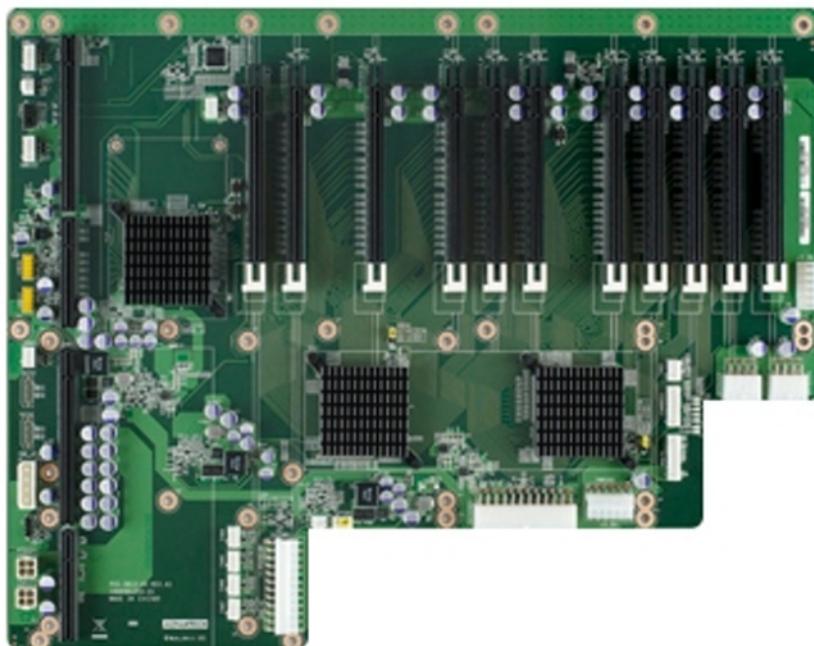

## Advantech (AVS-860 with PCE-7129 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7129 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C236				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	Core version: 5.0.1.2.0.20 ×64 Project version: 7129000CF60E201				
<b>Power supply</b>	800W redundant Optional power supply required for maximum support of third party graphics hardware.				
<b>Chassis</b>	6U rack mount				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure to insert the rubber foot to secure the cards into position. It's there to protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P1PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console display	E	Empty (Unusable)	
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

### Motherboard layout

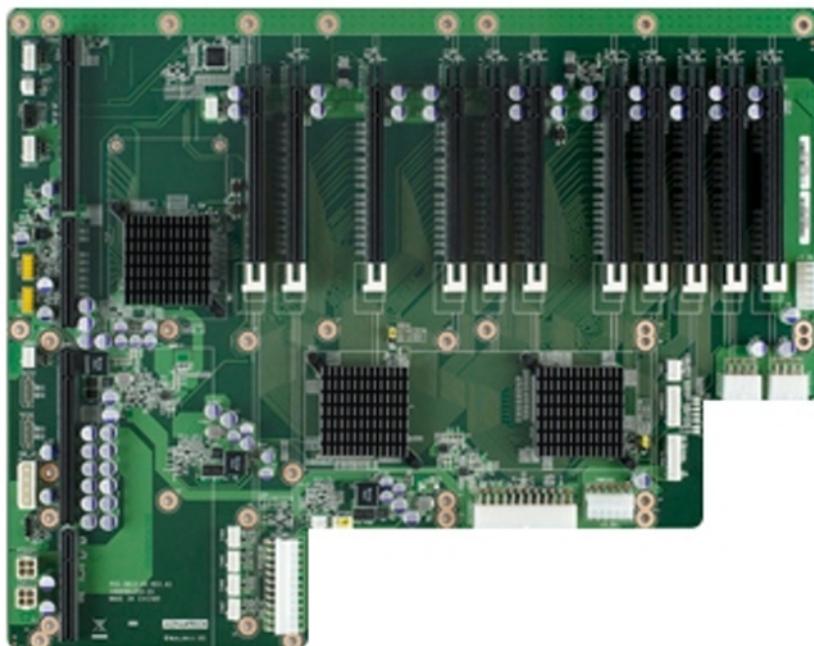

## Blue Chip Ultima 2M

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	2				
<b>Motherboard</b>	BCT130 (SBC) + BP-PCIE-2M/2 (Passive Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 2.0 slots (x16 mechanical, x16 electrical)</li> <li>▪ 1 PCIe x16 2.0 slot (x16 mechanical, x1 electrical)</li> <li>▪ 1 PCIe x1 2.0 slot</li> </ul>				
<b>Chipset</b>	Intel® Q86 PCH				
<b>Processor</b>	Intel® i7-4770S, 3.10 GHz				
<b>System memory</b>	16 GB DDR3, 1333 MHz				
<b>System BIOS version</b>	2.13.1215				
<b>Power supply</b>	300W				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Intel Gen 4 i3, i5, and i7 CPU options available from the supplier.</li> <li>▪ Dual redundant PSU option available from the supplier.</li> </ul>				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P15	—		Mura MPX-4/4	A, B	—	
P14	—		Mura MPX-4/4	B	—	
P13	—		Console display	E	—	
P17	—		Empty (Unusable)		—	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Blue Chip Ultima 5M

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			

<b>Maximum number of cards supported</b>	5
<b>Motherboard</b>	BCT120 (SBC) + BP-PCIE-5M/3 (Passive Backplane)
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 5 PCIe x16 2.0 slots</li> <li>▪ 3 PCIe x1 2.0 slots</li> </ul>
<b>Chipset</b>	Intel® Q77 PCH
<b>Processor</b>	Intel® Quad Core™ i5-3450, 3.10 GHz
<b>System memory</b>	4 GB DDR3, 1333 MHz
<b>System BIOS version</b>	2.13.1215
<b>Power supply</b>	750W
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Intel Gen 3 i5 and i7 CPU options available from the supplier.</li> <li>▪ Dual redundant PSU option available from the supplier.</li> <li>▪ Memory can be upgraded to a maximum of 16 GB.</li> </ul>

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe4	—		Empty (Unusable)		—	
PCIe5	—		Mura MPX-4/4	A, B, D	—	
PCIe6	—		Mura MPX-4/4	A, B, D	—	
PCIe7	—		Mura MPX-4/4	B	—	
PCIe8	—		Mura MPX-4/4	A, B, D	—	
PCIe9	—		Mura MPX-4/4	B	—	
PCIe10	—		Empty (Unusable)		—	
PCIe11	—		Empty (Unusable)		—	
<b>Option</b>		<b>Product</b>				
<b>A</b>		MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF				
<b>B</b>		Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI				
<b>C</b>		C900 or C680				
<b>D</b>		Mura MPX-V16 or MPX-V8				
<b>E</b>		Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)				
<b>F</b>		Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)				

## Blue Chip Ultima Mura i7

<b>Maximum number of cards supported</b>	7
<b>Motherboard</b>	ASUS® P6T7 WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ Slots 1, 3, and 5 – PCIe ×16 2.0 at ×16 or ×8 mode</li> <li>▪ Slot 7 – PCIe ×16 2.0 at ×16 mode</li> <li>▪ Slots 2, 4, and 6 – PCIe ×16 2.0 at ×8 mode</li> </ul>
<b>Chipset</b>	Intel® Q77 PCH
<b>Processor</b>	Intel® i5-3450, 3.10 GHz
<b>System memory</b>	3 GB DDR3
<b>System BIOS version</b>	1001
<b>Power supply</b>	750W
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first 4 cards in the blue slots labeled 1, 3, 5, and 7.</li> <li>▪ Insert the last 3 cards in the slots labeled 2, 4, and 6.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards (in blue slots) → ×16</li> <li>▪ 5 cards → 3 ×8 + 2 ×8</li> <li>▪ 6 cards → 2 ×16 + 4 ×8</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>
<b>Notes</b>	If you install a card in PCIe ×16 slot 7, the two front USB connectors won't be functional due to mechanical conflicts. The six USB connectors in the back are functional.

## Dell® Precision™ Workstation T3500

<b>Maximum number of cards supported</b>	2
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×8 slots wired as ×4 (one half-length)</li> <li>▪ 2 PCIe ×16 2.0 slots</li> </ul>
<b>Chipset</b>	Intel® X58
<b>Processor</b>	Intel® Xeon® E5507, 2.27 GHz
<b>System memory</b>	4 GB DDR3
<b>System BIOS version</b>	A08
<b>Power supply</b>	525W
<b>Expansion slot configuration</b>	Insert the Mura cards in slots 2 and 4 labeled <b>PCIe2 ×16 75W</b> .

## Dell® Precision™ Workstation T3600

<b>Maximum number of cards supported</b>	3
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical and electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical and ×4 electrical)</li> <li>▪ 1 PCIe ×4 2.0 slot</li> <li>▪ 1 PCIe ×1 2.0 slot</li> </ul>
<b>Chipset</b>	Intel® C600
<b>Processor</b>	Intel® Xeon® E5-1603, 2.27 GHz
<b>System memory</b>	8 GB DDR3
<b>System BIOS version</b>	A06

<b>Power supply</b>	425W
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the Mura MPX-4/4 cards in slots labeled <b>SLOT2-PCIe3x16</b> and <b>SLOT4-PCIe3x16</b>.</li> <li>▪ Insert the Mura MPX-V16 or MPX-V8 card in the slot labeled <b>SLOT1-PCIe3x4</b>.</li> </ul>
<b>Notes</b>	In the system BIOS, go to <b>Settings → Power Management → Fan Speed Control</b> , then select <b>Medium</b> . If you experience erratic USB behavior with the onboard USB controller, add a PCIe USB controller to your system.

## Dell® Precision™ Workstation T3610

<b>Maximum number of cards supported</b>	3
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical, x16 electrical)</li> <li>▪ 1 PCIe x16 3.0 slot (x16 mechanical, x8 electrical)</li> <li>▪ 1 PCIe x4 2.0 slot</li> <li>▪ 1 PCIe x1 2.0 slot</li> </ul>
<b>Chipset</b>	Intel® C602
<b>Processor</b>	Intel® Xeon® E5-1620 processor V2, 3.70 GHz
<b>System memory</b>	8 GB DDR3, 1333 MHz
<b>System BIOS version</b>	A03
<b>Power supply</b>	685W
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first Mura MPX-4/4 card in the slot labeled <b>SLOT4-PCIe3x16</b>.</li> <li>▪ Insert the second Mura MPX-4/4 card in the slot labeled <b>SLOT2-PCIe3x16</b>.</li> <li>▪ Insert the Mura MPX-V16 or MPX-V8 card in the slot labeled <b>SLOT1-PCIe3x8</b>.</li> </ul>
<b>Possible maximum configuration</b>	2 Mura MPX-4/4 cards + 1 Mura MPX-V16 or MPX-V8 card
<b>Notes</b>	In the system BIOS, go to <b>Settings → Power Management → Fan Speed Control</b> , then select <b>Medium</b> .

## Delo Step-PC Professional VS-Series X79

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	Yes
<b>Part number</b>	1044185			
<b>Maximum number of cards supported</b>	4			
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 3 PCIe x16 3.0/2.0 slots (dual x16, or x16, x8, x8)</li> <li>▪ 1 PCIe x16 3.0/2.0 slot (x8 mode)</li> <li>▪ 2 PCIe x16 2.0 3.0/2.0 slots (x1 mode)</li> </ul>			
<b>Motherboard</b>	ASUS P9X79 WS			
<b>Chipset</b>	Intel® X79 Express			
<b>Processor</b>	Intel® Core™ i7-3930K Hexa-Core processor (S2011), max. 3.8 GHz, 12 MB cache			
<b>System memory</b>	12 GB DDR3 dual-channel			
<b>Chassis</b>	Delo Step Multi-View			
<b>Power supply</b>	550W SeaSonic			

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	—	
PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B	—	
PCIEX16_3	Console display	F	Console display	D	—	
PCIEX16_4	C680	C	Mura MPX-4/4	A, B	—	
PCIEX16_5	Empty		Empty		—	
PCIEX16_6	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B	—	
<b>Option</b>		<b>Product</b>				
<b>A</b>		MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF				
<b>B</b>		Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI				
<b>C</b>		C900 or C680				
<b>D</b>		Mura MPX-V16 or MPX-V8				
<b>E</b>		Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)				
<b>F</b>		Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)				

## Delo Step-PC Professional VS-Series Z77

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	4				
<b>Motherboard</b>	ASUS P8Z77 WS				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul>				
<b>Chipset</b>	Intel® Z77 Express				
<b>Processor</b>	Intel® Core™ i7-3770T Quad-Core processor (S1155), max. 3.7 GHz, 8 MB cache, HD4000, 45W				
<b>System memory</b>	8 GB DDR3 dual-channel				
<b>Chassis</b>	Delo Step Multi-View				
<b>Power supply</b>	550W SeaSonic				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	—		Mura MPX-4/4	B	—	
PCIEX16_2	—		Mura MPX-4/4	A, B	—	
PCIEX1_1	—		Empty (Unusable)		—	

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_3	—		Mura MPX-4/4	A, B	—	
PCIEX1_2	—		Empty (Unusable)		—	
PCIEX16_4	—		Mura MPX-4/4	A, B	—	
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus PCIe x1, or Matrox M9120 PCIe x16 (console options)					
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## HP® Z600 Workstation

Maximum number of cards supported	2
PCIe expansion slots	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 2.0 slots</li> <li>▪ 1 PCIe 2.0 slot (x8 mechanical, x4 electrical)</li> <li>▪ 1 PCIe 1.0 slot (x8 mechanical, x4 electrical)</li> </ul>
Chipset	Intel® 5520
Processor	Intel® Xeon® E5504, 2.00 GHz
System memory	6 GB DDR3
System BIOS version	786G4 v03.15
Power supply	650W
Expansion slot configuration	Insert the Mura cards in slots 2 and 4 with green tabs labeled <b>PCIe2 x16 75W</b> .

## Nijkerk (System MURA V1)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	7			
<b>Motherboard</b>	ASUS® P6T7 WS			
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ Slots 1, 3, and 5 – PCIe ×16 2.0 at ×16 or ×8 mode</li> <li>▪ Slot 7 – PCIe ×16 2.0 at ×16 mode</li> <li>▪ Slots 2, 4, and 6 – PCIe ×16 2.0 at ×8 mode</li> </ul>			
<b>Chipset</b>	Intel® X58 Express			
<b>Processor</b>	Intel® Core™ i7-950, 3.20 GHz			
<b>System memory</b>	6 GB DDR3			
<b>System BIOS version</b>	1001			
<b>Chassis</b>	NCS-R416A-MB-NOIR			
<b>Power supply</b>	750W			
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards (blue slots) → ×16</li> <li>▪ 5 cards → 3 ×8 + 2 ×8</li> <li>▪ 6 cards → 2 ×16 + 4 ×8</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>			
<b>Notes</b>	If you install a card in PCIe ×16 slot 7, the two front USB connectors won't be functional due to mechanical conflicts. The six USB connectors in the back are functional.			

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
1	—		Mura MPX-4/4	A, B, D	—	
2	—		Mura MPX-4/4	A, B, D	—	
3	—		Mura MPX-4/4	A, B, D	—	
4	—		Mura MPX-4/4	A, B, D	—	
5	—		Mura MPX-4/4	A, B, D	—	
6	—		Mura MPX-4/4	A, B, D	—	
7	—		Mura MPX-4/4	A, B, D	—	
<b>Option</b>		<b>Product</b>				
<b>A</b>		MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF				
<b>B</b>		Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI				
<b>C</b>		C900 or C680				
<b>D</b>		Mura MPX-V16 or MPX-V8				
<b>E</b>		Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)				
<b>F</b>		Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)				

## Pyramid Multiplex R-19 Mura System

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Part number</b>	CPYIV-VX330A01			
<b>Maximum number of cards supported</b>	2			
<b>Motherboard</b>	Advantech ASMB-781G4-00A1E			
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 2.0 slots</li> <li>▪ 1 PCIe ×4 2.0 slot</li> <li>▪ 1 PCIe ×1 2.0 slot</li> </ul>			
<b>Chipset</b>	Intel® C206			
<b>Processor</b>	Intel® Core™ i3-2120, 3.30 GHz			
<b>System memory</b>	8 GB DDR3 1333 ATP			
<b>System BIOS version</b>	1.1			
<b>Power supply</b>	500W industrial BEA-550H			

## Pyramid Multiplex S Mura System

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Part number</b>	CPYIV-BF320A01			
<b>Maximum number of cards supported</b>	1			
<b>Motherboard</b>	SB331-IPM			
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 1 PCIe ×16 3.0/2.0 slot (x16 mechanical and electrical)</li> <li>▪ 1 PCIe ×16 3.0/2.0 slot (x16 mechanical, x4 electrical)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul>			
<b>Chipset</b>	Intel® Q67			
<b>Processor</b>	Intel® Core™ i3-2120, 3.30 GHz			
<b>System memory</b>	8 GB DDR3			
<b>System BIOS version</b>	2.14.1219			
<b>Power supply</b>	300W			
<b>Notes</b>	Insert the optional Mura MPX-V16 or MPX-V8 card in the slot labeled PCIE4.			

## Seneca PrysmHD Plus

<b>Part number</b>	prysmHD-plus
<b>Maximum number of cards supported</b>	7
<b>Motherboard</b>	ASUS® X99-E WS
<b>PCIe expansion slots</b>	7 PCIe ×16 3.0/2.0 slots
<b>Chipset</b>	Intel® X99
<b>Processor</b>	Intel® Core™ i7-5930K, 3.5 GHz
<b>System memory</b>	32 GB DDR4

<b>System BIOS version</b>	0902
<b>Power supply</b>	860W
<b>Chassis</b>	4U
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you're installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you're installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_3</b>.</li> <li>▪ If you're installing up to four cards, insert the third and fourth Mura card in the slots labeled <b>PCIEX16_5</b> and <b>PCIEX16_7</b>.</li> <li>▪ If you're installing more than four cards, use the remaining available slots.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>

## Seneca VWC-4

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	Yes
<b>Part number</b>	VWC-4			
<b>Maximum number of cards supported</b>	5			
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	4			
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	4			
<b>Maximum supported C900/C680</b>	2			
<b>Motherboard</b>	ASUS® P9X79 WS			
<b>PCIe expansion slots</b>	4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8, black and blue)			
<b>Chipset</b>	Intel® X79			
<b>Processor</b>	Intel® Core™ i7, third generation processor			
<b>System memory</b>	8 GB DDR3 1333 MHz			
<b>System BIOS version</b>	3101			
<b>Power supply</b>	750W single power supply option for redundant power			
<b>Chassis</b>	4U			
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → 4 ×8</li> </ul>			
<b>Notes</b>	For two-card configurations, a longer ribbon cable (for framelock) is required (P/N: F16279-00). For more information, contact your Matrox representative.			

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_1</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCIEX16_2</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_3</b>	Console display	F	Console display	D	Empty	

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_4	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_5	Empty		Empty		Empty	
PCIEX16_6	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Seneca VWC-PRO

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	12				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	8				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Trenton TKL8255 (SHB), BPG8194 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 8 PCIe x16 3.0 slots (mechanical and electrical)</li> <li>▪ 5 PCIe x16 3.0 slots (mechanical, x4 electrical)</li> </ul>				
<b>Chipset</b>	C236				
<b>Processor</b>	Intel i7-6700 @ 3.4 GHz (16 Lanes)				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	0ACKV 0.04 x64				
<b>Power supply</b>	900W redundant				
<b>Chassis</b>	5U rack mount				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The integrated graphics hardware must be disabled in Windows Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ The system BIOS is available at <a href="ftp://VWC_PRO:0GEg2TEi@privftp.matrox.com">ftp://VWC_PRO:0GEg2TEi@privftp.matrox.com</a>.</li> <li>▪ In the system BIOS, go to <b>Chipset</b> → <b>System Agent (SA) Configuration</b> → <b>Graphics Configuration</b> → <b>Primary Display</b>, then select <b>IGFX</b>.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIEX16_2</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCIEX16_3</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIEX16_4</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_5</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_6</b>	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
<b>PCIEX16_7</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_8</b>	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
<b>PCIEX16_9</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_10</b>	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
<b>PCIEX16_11</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
<b>PCIEX16_12</b>	Console display	F	Console display	D, E	Empty (Unusable)	
<b>PCIEX16_13</b>	C680	A, C	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

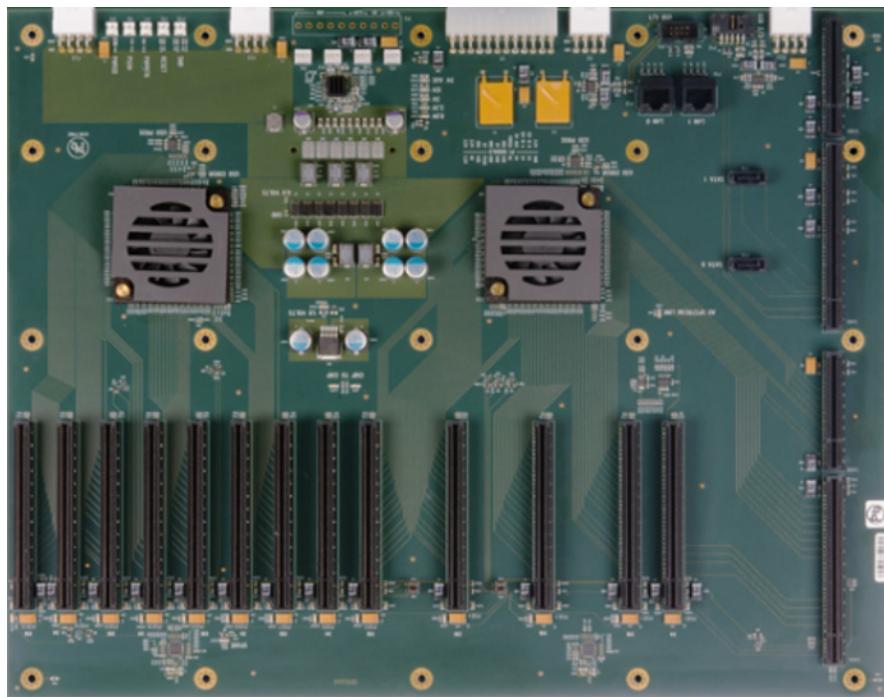

## Synnex Canada Touch Mura X79

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	Yes

<b>Part number</b>	TOUCH MURA X79
<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	ASUS® P9X79 WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8, black and blue)</li> <li>▪ 2 PCIe ×16 3.0/2.0 slots at ×4 mode (white)</li> </ul>
<b>Chipset</b>	Intel® X79
<b>Processor</b>	Intel® Core™ i7-3820, 3.60 GHz
<b>System memory</b>	8 GB DDR3 1333 MHz
<b>System BIOS version</b>	3101
<b>Power supply</b>	900W
<b>Chassis</b>	Chenbro RM422 4U
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → 4 ×8</li> </ul>
<b>Notes</b>	For two-card configurations, a longer ribbon cable (for framelock) is required (P/N: F16279-00). For more information, contact your Matrox representative.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_1</b>	C680	C	Mura MPX-4/4	B	—	
<b>PCIEX16_2</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B	—	
<b>PCIEX16_3</b>	Console display	F	Console display	D	—	
<b>PCIEX16_4</b>	C680	C	Mura MPX-4/4	A, B	—	
<b>PCIEX16_5</b>	Empty		Empty		—	
<b>PCIEX16_6</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B	—	

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 LP PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Synnex Canada Touch Mura Z77

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Part number</b>				
TOUCH MURA Z77				
<b>Maximum number of cards supported</b>				
4				
<b>Motherboard</b>				
ASUS® P8Z77 WS				
<b>PCIe expansion slots</b>				
<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul>				
<b>Chipset</b>				
Intel® Z77 Express				
<b>Processor</b>				
Intel® Core™ i7-3770K, 3.50 GHz				
<b>System memory</b>				
8 GB DDR3				
<b>System BIOS version</b>				
0502 ×64				
<b>Power supply</b>				
900W				
<b>Chassis</b>				
Chenbro RM422 4U				
<b>Performance considerations</b>				
<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → 4 ×8</li> </ul>				
<b>Notes</b>				
For two-card configurations, a longer ribbon cable (for framelock) is required (P/N: F16279-00). For more information, contact your Matrox representative.				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	—		Mura MPX-4/4	B	—	
PCIEX16_2	—		Mura MPX-4/4	A, B	—	
PCIEX1_1	—		Empty (Unusable)		—	
PCIEX16_3	—		Mura MPX-4/4	A, B	—	
PCIEX1_2	—		Empty (Unusable)		—	
PCIEX16_4	—		Mura MPX-4/4	A, B	—	
<b>Option</b>		<b>Product</b>				
<b>A</b>		MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF				
<b>B</b>		Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI				
<b>C</b>		C900 or C680				
<b>D</b>		Mura MPX-V16 or MPX-V8				
<b>E</b>		Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)				
<b>F</b>		Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)				

## Trenton TVC2404

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	4				
<b>Motherboard</b>	TSB 7053 (SHB), BPC8219 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 3 PCIe x16 2.0 slot (x16 mechanical and electrical)</li> <li>▪ 1 PCIe x16 2.0 slot (x16 mechanical and x4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	Intel® Core™ i7-3770 quad core processor 3.4 GHz				
<b>System memory</b>	16 GB DDR3, 1600 MHz				
<b>System BIOS version</b>	0ACCI 0.08 X64				
<b>Power supply</b>	600W				
<b>Chassis</b>	2U rack mount				
<b>Notes</b>	This platform will not be supported for future projects.				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe1 x4	—		Console display	D, F	—	
PCIe2 x16	—		Mura MPX-4/4	B	—	
PCIe3 x16	—		Mura MPX-4/4	A, B, D	—	
PCIe4 x16	—		Mura MPX-4/4	A, B, D	—	
<b>Option</b>		<b>Product</b>				
<b>A</b>		MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF				
<b>B</b>		Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI				
<b>C</b>		C900 or C680				
<b>D</b>		Mura MPX-V16 or MPX-V8				
<b>E</b>		Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)				
<b>F</b>		Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)				

## Trenton TVC3400

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	2				
<b>Motherboard</b>	Trenton JXMS7031				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical and electrical via riser card)</li> <li>▪ 2 PCIe ×16 2.0 slots (×16 mechanical and ×8 electrical via riser card)</li> </ul>				
<b>Chipset</b>	Intel® 3420				
<b>Processor</b>	Intel® Xeon® EC5549 processor				
<b>System memory</b>	4 GB DDR3 Mini-DIMM				
<b>System BIOS version</b>	0ABYI 0.04 X64				
<b>Power supply</b>	550W				
<b>Chassis</b>	3U shelf mount				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ The integrated graphics hardware must be disabled in Windows® Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ The mouse pointer may stutter or freeze when it's moved over a display. To fix this, try reinstalling the network adapter driver.</li> <li>▪ Optional system memory upgrade is available.</li> </ul>				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe1	—		Mura MPX-4/4	B	—	
PCIe2	—		Empty		—	
PCIe3	—		Mura MPX-4/4	A, B, D	—	
PCI	—		Empty (Unusable)		—	
<b>Option</b>	<b>Product</b>					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
<b>C</b>	C900 or C680					
<b>D</b>	Mura MPX-V16 or MPX-V8					
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## Trenton TVC4400

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	2				
<b>Motherboard</b>	Trenton JXMS7031 (single CPU)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 1 PCIe x16 2.0 slot (x16 mechanical and electrical)</li> <li>▪ 2 PCIe x16 2.0 slots (x16 mechanical and x8 electrical)</li> </ul>				
<b>Chipset</b>	Intel® 3420				
<b>Processor</b>	Intel® Xeon® EC5509, quad-core 2.00 GHz				
<b>System memory</b>	4 GB DDR3 Mini-DIMM				
<b>System BIOS version</b>	0ABYI 0.04 X64				
<b>Power supply</b>	550W				
<b>Chassis</b>	4U shelf mount				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ The integrated graphics hardware must* be disabled in Windows® Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ Optional system memory upgrade is available.</li> </ul>				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIe1*	—		Empty (Unusable)		—	
PCIe2	—		Mura MPX-4/4	B	—	
PCIe3	—		Mura MPX-4/4	A, B, D	—	
PCI	—		Empty (Unusable)		—	

\* Unavailable with single CPU system.

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Trenton TVC4403 with JXTS6966

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	9 (No intercard transfers in ×4 slots)				
<b>Motherboard</b>	JXTS6966 (SHB), BPG7087 (Backplane)				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	9				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	8				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 2.0 slots</li> <li>▪ 6 PCIe ×4 2.0 slots (no intercard transfers)</li> </ul>				
<b>Chipset</b>	Intel® 3420				
<b>Processor</b>	Quad-Core Intel® Xeon® EC5500 Series				
<b>System memory</b>	4 GB DDR3				
<b>System BIOS version</b>	0ACAR 0.08×64				
<b>Power supply</b>	800W redundant				
<b>Chassis</b>	4U rack mount				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 5 cards → 4 ×16 + 1 ×4</li> <li>▪ 6 cards → 4 ×16 + 2 ×4</li> <li>▪ 7 cards → 4 ×16 + 3 ×4</li> <li>▪ 8 cards → 4 ×16 + 4 ×4</li> <li>▪ 9 cards → 4 ×16 + 5 ×4</li> </ul>				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ While using up to 4 cards, the slot labeled <b>PCIe4</b> is used for the primary display.</li> <li>▪ While using more than 4 cards, if both slots labeled <b>PCIe3</b> and <b>PCIe4</b> are used, <b>PCIe3</b> is used for the primary display.</li> <li>▪ Optional system memory upgrade is available.</li> <li>▪ Check with supplier for available CPU options.</li> <li>▪ With C-Series based controllers, the integrated graphics must be disabled in the system BIOS to successfully install the driver.</li> <li>▪ With Mura MPX Series based controllers, the integrated graphics must be enabled in the system BIOS but disabled in the Windows Device Manager.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIe1x4</b>	Console display	F	Mura MPX-4/4	B	Empty	
<b>PCIe2x4</b>	Empty		Empty (unusable)		Empty	
<b>PCIe3x4</b>	Empty		Mura MPX-4/4	A, B, D	Empty	
<b>PCIe4x16</b>	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
<b>PCIe5x4</b>	Empty		Mura MPX-4/4	A, B, D	Empty	

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIe6x16</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIe7x4</b>	Empty		Mura MPX-4/4	A, B, D	Empty	
<b>PCIe8x16</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIe9x4</b>	Empty		Mura MPX-4/4	A, B, D, E	Empty	
<b>PCIe10x16</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Trenton TVC4403 with TSB7053

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	9 (No intercard transfers in ×4 slots)				
<b>Motherboard</b>	TSB7053 (SHB), BPG7087 (Backplane)				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	9				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	8				
<b>Maximum supported C900/C680</b>	2				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 2.0 slots</li> <li>▪ 6 PCIe ×4 2.0 slots (no intercard transfers)</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	3rd Generation Intel® i7 Quad-Core CPU Intel® Xeon® E-3 1200 Series Quad-Core CPU				
<b>System memory</b>	4 GB DDR3				
<b>System BIOS version</b>	TTICIM08.ROM				
<b>Power supply</b>	800W redundant				
<b>Chassis</b>	4U rack mount				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 5 cards → 4 ×16 + 1 ×4</li> <li>▪ 6 cards → 4 ×16 + 2 ×4</li> <li>▪ 7 cards → 4 ×16 + 3 ×4</li> <li>▪ 8 cards → 4 ×16 + 4 ×4</li> <li>▪ 9 cards → 4 ×16 + 5 ×4</li> </ul>				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ While using up to 4 cards, the slot labeled <b>PCIe4</b> is used for the primary display.</li> <li>▪ While using more than 4 cards, if both slots labeled <b>PCIe3</b> and <b>PCIe4</b> are used, <b>PCIe3</b> is used for the primary display.</li> <li>▪ Optional system memory upgrade is available.</li> <li>▪ Check with supplier for available CPU options.</li> <li>▪ With C-Series based controllers, the integrated graphics must be disabled in the system BIOS to successfully install the driver.</li> <li>▪ With Mura MPX Series based controllers, the integrated graphics must be enabled in the system BIOS but disabled in the Windows Device Manager.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIe1x4</b>	Console display	F	Mura MPX-4/4	B	Empty	
<b>PCIe2x4</b>	Empty		Empty (unusable)		Empty	
<b>PCIe3x4</b>	Empty		Mura MPX-4/4	A, B, D	Empty	
<b>PCIe4x16</b>	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
<b>PCIe5x4</b>	Empty		Mura MPX-4/4	A, B, D	Empty	

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIe6x16</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIe7x4</b>	Empty		Mura MPX-4/4	A, B, D	Empty	
<b>PCIe8x16</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIe9x4</b>	Empty		Mura MPX-4/4	A, B, D, E	Empty	
<b>PCIe10x16</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Trenton TVC4406

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Motherboard</b>	ASUS® P9X79 WS				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8, black and blue)</li> <li>▪ 2 PCIe ×16 3.0/2.0 slots at ×4 mode (white)</li> </ul>				
<b>Chipset</b>	Intel® X79				
<b>Processor</b>	Intel® Core™ i7-3820, 3.8 GHz				
<b>Heatsink (for CPU)</b>	LGA 2011 fan heatsink for the CPU				
<b>System memory</b>	4 GB DDR3				
<b>System BIOS version</b>	0603 X64 dated 11/11/2011				
<b>Power supply</b>	800W redundant				
<b>Power supply bracket</b>	Standard with the Trenton chassis				
<b>Chassis</b>	4U rack mount				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → ×8</li> </ul>				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <p>For two-card configurations, a longer ribbon cable (for framelock) is required (P/N: F16279-00). For more information, contact your Matrox representative.</p>				

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_1</b>	C680	C	Mura MPX-4/4	B	—	
<b>PCIEX16_2</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	—	
<b>PCIEX16_3</b>	Console display	F	Console display	D	—	
<b>PCIEX16_4</b>	C680	C	Mura MPX-4/4	A, B, D	—	
<b>PCIEX16_5</b>	Empty		Empty		—	
<b>PCIEX16_6</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D, E	—	

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Trenton TVC4502

<b>Maximum number of cards supported</b>	1
<b>Motherboard</b>	Trenton JXMI8001
<b>Available PCIe expansion slots</b>	2 PCIe ×16 2.0 slots (x16 mechanical, x8 electrical)
<b>Chipset</b>	Intel® 3420
<b>Processor</b>	Intel® Xeon® EC5509 quad-core, 2.00 GHz
<b>System memory</b>	4 GB DDR3 Mini-DIMM
<b>System BIOS version</b>	0ABYI 0.04 X64
<b>Power supply</b>	550W
<b>Power supply bracket</b>	Standard with the Trenton chassis
<b>Chassis</b>	4U rack mount
<b>Notes</b>	This platform will not be supported for future projects.

## Trenton TVC5401 (with JXTS6966 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	16 (max. 29 GPUs)				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	16				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	15				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	JXTS6966 (SHB), BPG8032 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 17 PCIe ×16 2.0 slots (mechanical and electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (mechanical, x4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® 3420				
<b>Processor</b>	Intel® Xeon® EC5500 Series (single or dual), Quad-Core				
<b>System memory</b>	4 GB DDR3				
<b>System BIOS version</b>	0ACAR 0.08x64				
<b>Power supply</b>	1485W redundant				
<b>Chassis</b>	5U rack mount				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ Optional dual CPU configuration is available.</li> <li>▪ The integrated graphics hardware must be disabled in Windows® Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ The maximum number of GPUs supported by Windows is 29.</li> <li>▪ Due to a mechanical conflict with the SHB, slots labeled <b>PCIe1</b> and <b>PCIe2</b> aren't functional.</li> <li>▪ Optional system memory upgrade is available.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIE1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIE2</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIE3</b>	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A, D, E	Third party graphics hardware	A
<b>PCIE4</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, D	MURAIPXI-D4JF	A
<b>PCIE5</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE6</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE7</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIE8</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE9</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIE10</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE11</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE12</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE13</b>	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
<b>PCIE14</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE15</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE16</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE17</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE18</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	B	Third party graphics hardware	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

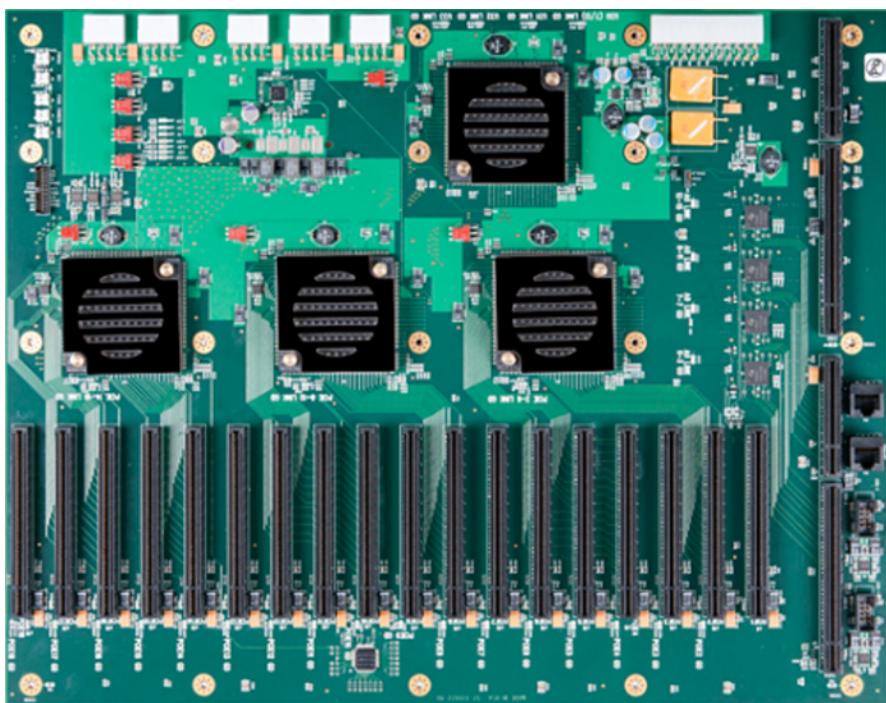

## Trenton TVC5401 (with TSB7053 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	No foreseeable compatibility issues	No foreseeable compatibility issues	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	16 (max. 29 GPUs)				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	16				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	15				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	TSB7053 (SHB), BPG8032 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 17 PCIe ×16 2.0 slots (mechanical and electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	3rd Generation Intel® i7 Quad-Core CPU (TSB7053) Intel® Xeon® E-3 1200 Series Quad-Core CPU (TSB7053)				
<b>System memory</b>	4 GB DDR3				
<b>System BIOS version</b>	TTICIM08.ROM (TSB7053)				
<b>Power supply</b>	1485W redundant				
<b>Chassis</b>	5U rack mount				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ The integrated graphics hardware must be disabled in Windows® Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ The maximum number of GPUs supported by Windows is 29.</li> <li>▪ Due to a mechanical conflict with the SHB, slots labeled <b>PCIe1</b> and <b>PCIe2</b> aren't functional.</li> <li>▪ Optional system memory upgrade is available.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIE1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIE2</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIE3</b>	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A, D, E	Third party graphics hardware	A
<b>PCIE4</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, D	MURAIPXI-D4JF	A
<b>PCIE5</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE6</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE7</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIE8</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE9</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIE10</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIE11</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIE12	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE13	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
PCIE14	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE15	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE16	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE17	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE18	MURAIPXI-D4JF	A	Mura MPX-4/4	B	Third party graphics hardware	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

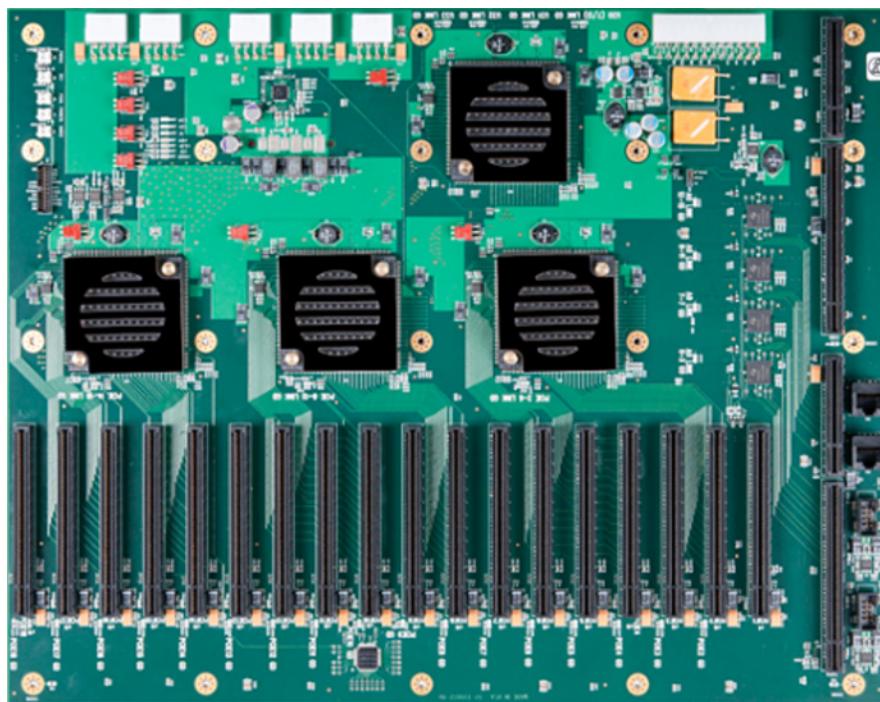

## Trenton TVC5402

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	12				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	8				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	11				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	TSB7053 (SHB), BPG8194 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 8 PCIe ×16 3.0 slots (mechanical and electrical)</li> <li>▪ 5 PCIe ×16 3.0 slots (mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	Intel® Core i7-3770, 3.4 GHz, Quad-Core				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	V2.7				
<b>Power supply</b>	1200W redundant				
<b>Chassis</b>	5U rack mount				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ The integrated graphics hardware must be disabled in Windows® Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ Optional system memory upgrade is available.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIE1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE2	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIE3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIE4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE6	Empty (Unusable)		Mura MPX-V16	D	Empty (Unusable)	
PCIE7	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIE8	Empty (Unusable)		Mura MPX-V8	A, B, D	Empty (Unusable)	
PCIE9	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIE10	Empty (Unusable)		Mura MPX-V8	A, B, D	Empty (Unusable)	
PCIE11	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller						
	Main	Options	Main	Options	Main	Options					
PCIE12	Console display	F	Console display	D, E	Empty (Unusable)						
PCIE13	C680	C	Mura MPX-4/4	B	Third party graphics hardware						
<b>Option</b>		<b>Product</b>									
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF										
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI										
C	C900 or C680										
D	Mura MPX-V16 or MPX-V8										
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)										
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)										

### Motherboard layout

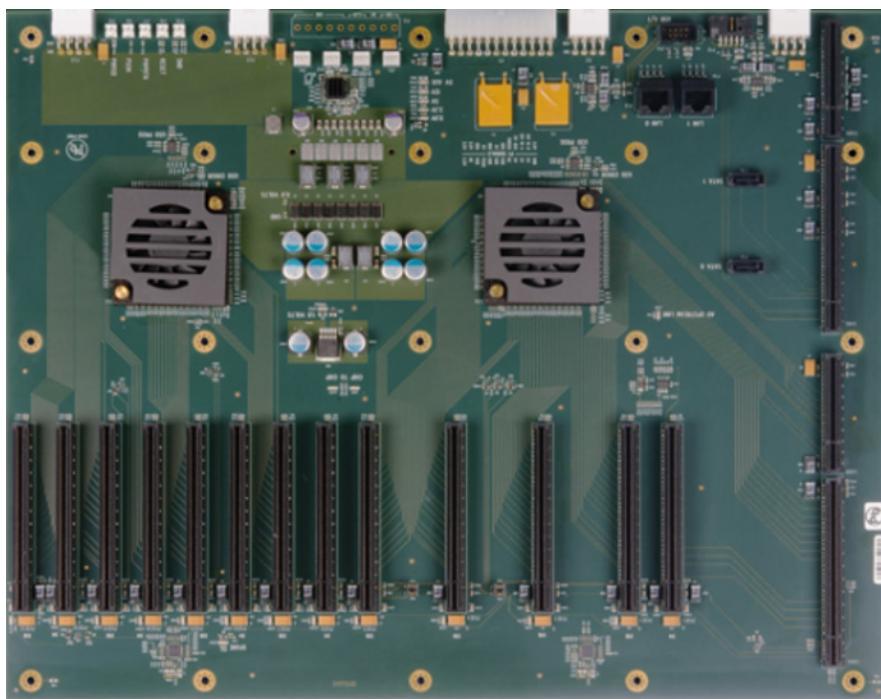

## Trenton TVC5402 (with TKL8255 SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	12				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	8				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Trenton TKL8255 (SHB), BPG8194 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 8 PCIe x16 3.0 slots (mechanical and electrical)</li> <li>▪ 5 PCIe x16 3.0 slots (mechanical, x4 electrical)</li> </ul>				
<b>Chipset</b>	C236				
<b>Processor</b>	Intel i7-6700 @ 3.4 GHz (16 Lanes)				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	0ACKV 0.04 x64				
<b>Power supply</b>	900W redundant				
<b>Chassis</b>	5U rack mount				
<b>Notes</b>	<p>This platform will not be supported for future projects.</p> <ul style="list-style-type: none"> <li>▪ The integrated graphics hardware must be disabled in Windows Device Manager. For more information, see your system manual or Windows help.</li> <li>▪ The system BIOS is available at <a href="ftp://TKL8255:7HfvSAO7@privftp.matrox.com">ftp://TKL8255:7HfvSAO7@privftp.matrox.com</a>.</li> <li>▪ In the system BIOS, go to Chipset → System Agent (SA) Configuration → Graphics Configuration → Primary Display, then select IGFX.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEX16_2	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX16_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIEX16_6	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
PCIEX16_7	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIEX16_8	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
PCIEX16_9	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIEX16_10	Empty (Unusable)		Mura MPX-V8	D	Empty (Unusable)	
PCIEX16_11	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_12</b>	Console display	F	Console display	D, E	Empty (Unusable)	
<b>PCIEX16_13</b>	C680	A, C	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

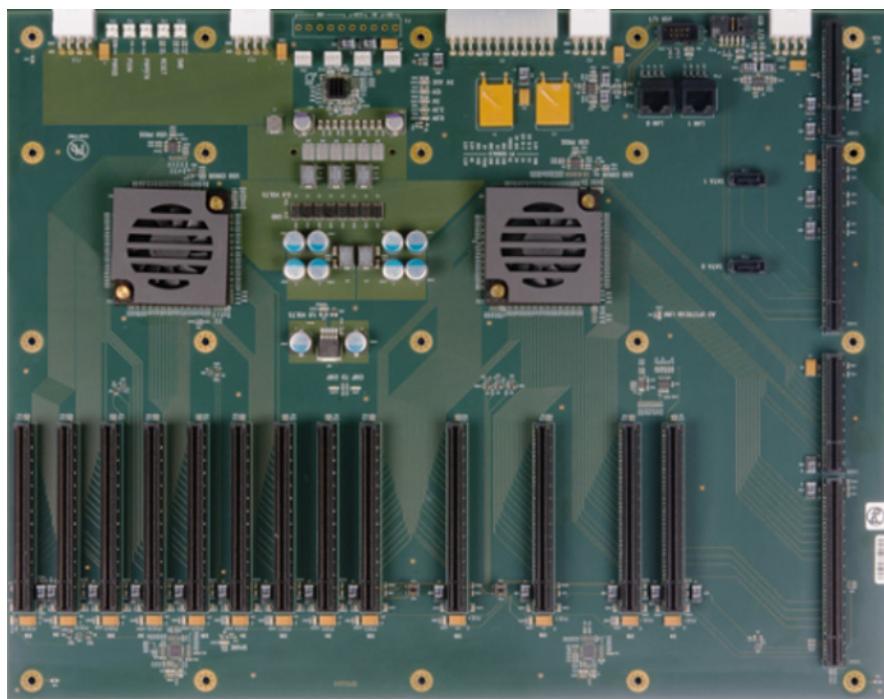

# Validated motherboards

The following motherboards have been validated by Matrox to work with Matrox Mura MPX Series, Mura IPX Series, C900, and C680 products.



**Note:** For improved performance, we recommend you avoid using PCIe® ×4 slots or lower.



**Note:** If graphics hardware is built into the motherboard of your system, you need to disable it in Windows® Device Manager on Mura MPX Series based video wall systems. For more information, see your system manual or Windows help.

## Currently supported motherboards



**Note:** Make sure your Mura system is in Legacy BIOS mode (MBR drive format). If your system came with UEFI mode (GPT drive format), make sure the Compatibility Support Module (CSM) is enabled to use the Legacy BIOS mode.

The following validated motherboards are currently supported. For a list of motherboards that are EOL (End of Life), [see page 151](#).

### Advantech ASMB-785G4-00A1E

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	3				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	2				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Advantech ASMB-785G4-00A1E				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"><li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, 1×16 or 2×8 electrical)</li><li>▪ 2 PCIe ×4 3.0 slots (×4 mechanical, ×4 electrical)</li></ul>				
<b>Chipset</b>	Intel® C236				
<b>Processor</b>	Intel® Xeon® E3-1225 V5 3.3 GHz				
<b>System memory</b>	8 GB DDR4				
<b>System BIOS version</b>	5.12				
<b>Power supply</b>	400W80 plus single power supply				
<b>Chassis</b>	IPX-7130-00XE				
<b>Notes</b>	<ul style="list-style-type: none"><li>▪ In the system BIOS, you should disable power saving mode.</li><li>▪ To use two ×8 links on the PCIe ×16 slot6 and slot4, set JPEG1 to pin2-3 closed and keep JPEG2 pin1-2 closed to enable on the motherboard.</li></ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCI Slot1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIe x4 Slot2</b>	Console display	F	Console display	E	Empty (Unusable)	
<b>PCI Slot3</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIe x16 Slot4</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCI Slot5</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCIe x16 Slot6</b>	MURAIPXI-D4JF	A, C	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIe x4 Slot7</b>	Empty	F	MURA-MPX-V8	D, E	Empty	

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

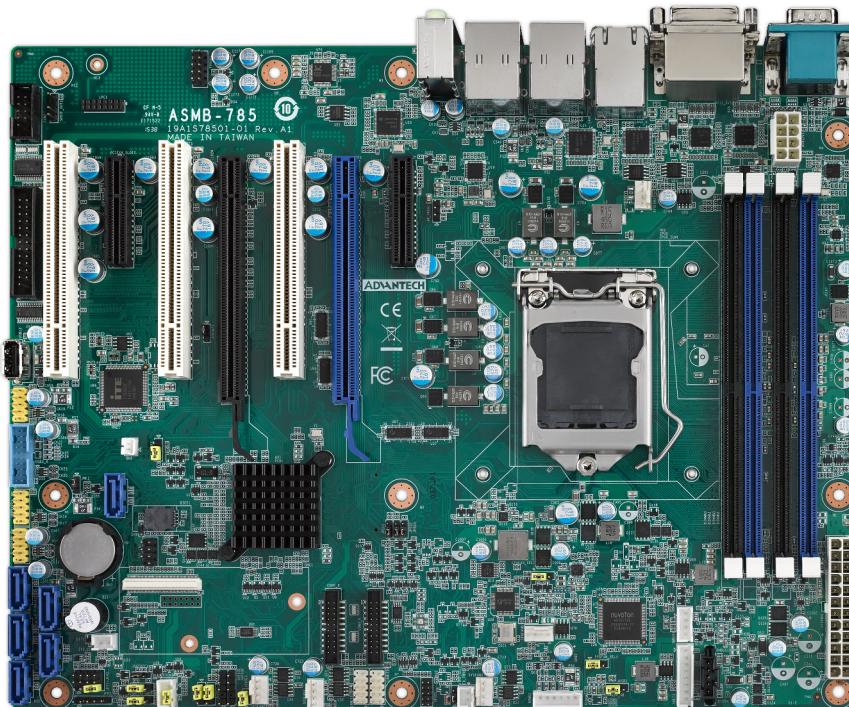

## Advantech ASMB-813I-00A1E

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	6				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	5				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	5				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Advantech ASMB-813I-00A1E				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×16 and ×8 electrical)</li> <li>▪ 3 PCIe ×16 3.0 slot (×16 mechanical, ×8 electrical)</li> <li>▪ 1 PCIe ×8 2.0 slot (×8 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C612				
<b>Processor</b>	Intel® Xeon® E5-2620 V4 2.1 GHz				
<b>Heatsink (for CPU)</b>	LGA 2011-R3				
<b>System memory</b>	8 GB DDR4 ECC-RDIMM 2400 MHz				
<b>System BIOS version</b>	Core version: 5.11 0.24 X64 Project version: ASMB S813X208				
<b>Power supply</b>	1400W 80 plus Redundant power supply				
<b>Chassis</b>	HPC-7400				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ In the system BIOS, select IntelRCSetup → IIO Configuration → CPU0 PCIe Configuration. The following has to be changed from [Auto] to [x8x8]:           <ul style="list-style-type: none"> <li>▪ IOU0 (PCIe Slot5/6) [x8x8]</li> <li>▪ IOU1 (PCIe Slot3/4) [x8x8]</li> </ul> </li> <li>▪ Make sure the JPRSNT1 &amp; JPRSNT2 jumpers on the motherboard are set to 2-3 when populating PCIe slots 3 and 5.</li> <li>▪ If you're using the onboard console with C-Series controller, make sure that, in the system BIOS, IntelRCsetup → VGA Priority is set to Onboard Device.</li> <li>▪ In the system BIOS, Advanced → PCI Subsystem settings- Above 4G Decoding should be set to Disabled.</li> <li>▪ With all slots populated, there could be a performance drop in the data transferred from a Mura IPX Series input to a graphics card. This may reduce the number of source frames successfully transferred from a Mura IPX Series input to a graphics card. For more information, please contact Matrox Display Wall Technical Support team at <a href="mailto:dwcsupport@matrox.com">dwcsupport@matrox.com</a>.</li> </ul>				


\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX1_Slot1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEX8_Slot2	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX8_Slot3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_Slot4	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX8_Slot5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller						
	Main	Options	Main	Options	Main	Options					
PCIEX16_Slot6	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A					
PCIEX4_Slot7	Console display	See notes	Console Display	E	Console display	See notes					
<b>Option</b>		<b>Product</b>									
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF										
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI										
<b>C</b>	C900 or C680										
<b>D</b>	Mura MPX-V16 or MPX-V8										
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus PCIe x1, or Matrox M9120 PCIe x16 (console options)										
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)										

## Motherboard layout

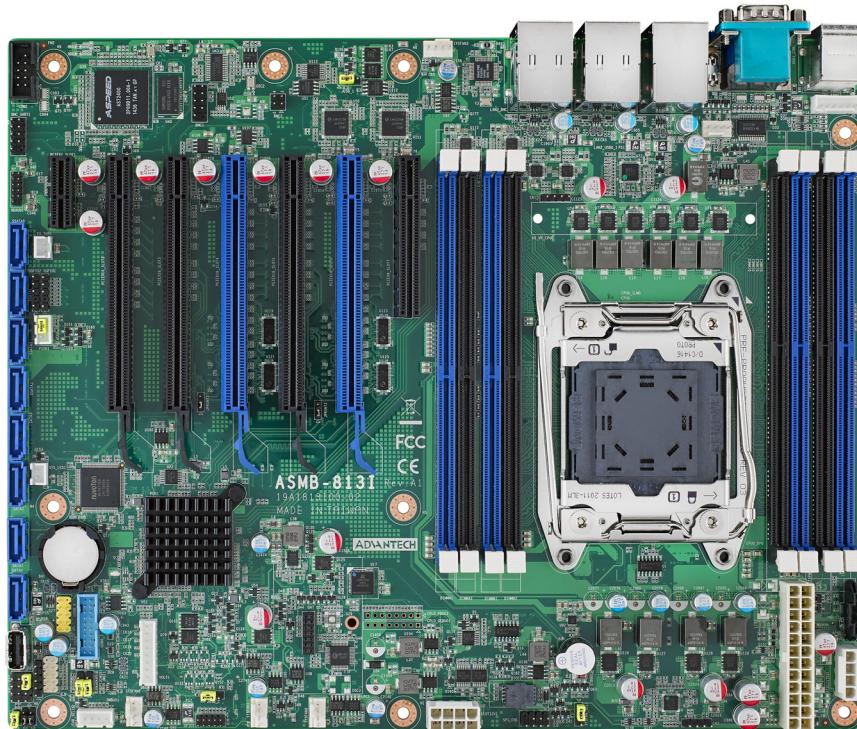

## Advantech ASMB-815

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	6				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	5				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	5				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASMB-815				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×8/×16 electrical)</li> <li>▪ 3 PCIe ×8 3.0 slots (×8 mechanical/electrical)</li> <li>▪ 1 PCIe ×4 3.0 slot (×4 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel C620				
<b>Processor</b>	Intel Xeon Scalable Processors (Xeon Silver / 4112 @ 2.6 GHz)				
<b>Heatsink (for CPU)</b>	LGA 3647-P0				
<b>System memory</b>	16 GB DDR4 ECC-RDIMM 2400 MHz				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.75 X64 Project version: S8150000060X022				
<b>Power supply</b>	700W 80 plus single power supply				
<b>Chassis</b>	Advantech ACP-4000MB-00XE				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If you plan on using local USB keyboard/mouse, you must add a PCI USB controller. Using the onboard USB controller may result in erratic USB behavior.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ In the system BIOS, select <b>Socket Configuration → IIO Configuration</b>, change the following from [Auto] to [x8x8]: <ul style="list-style-type: none"> <li>▪ IOU0 (IIO PCIe Br1) [x8x8]</li> <li>▪ IOU1 (IIO PCIe Br2) [x8x8]</li> <li>▪ IOU2 (IIO PCIe Br3) [x8x8]</li> </ul> </li> <li>▪ In the system BIOS, select <b>Advanced → PCI Subsystem Settings</b>, make sure <b>Above 4G</b> is disabled.</li> <li>▪ With all slots populated, there could be a performance drop in the data transferred from a Mura IPX Series input to a graphics card. This may reduce the number of source frames successfully transferred from a Mura IPX Series input to a graphics card. For more information, please contact Matrox Display Wall Technical Support team at <a href="mailto:dwcsupport@matrox.com">dwcsupport@matrox.com</a>.</li> <li>▪ Installing full length cards on PCIEx4_SLOT2 and PCIEx8_SLOT3 will obstruct access to the SATA6 and SATA7 connectors on the motherboard.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX1_Slot1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEX4_Slot2	Console Display	F	Console Display	E	Empty (Unusable)	
PCIEX8_Slot3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_Slot4</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCIEX8_Slot5</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_Slot6</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIEX8_Slot7</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

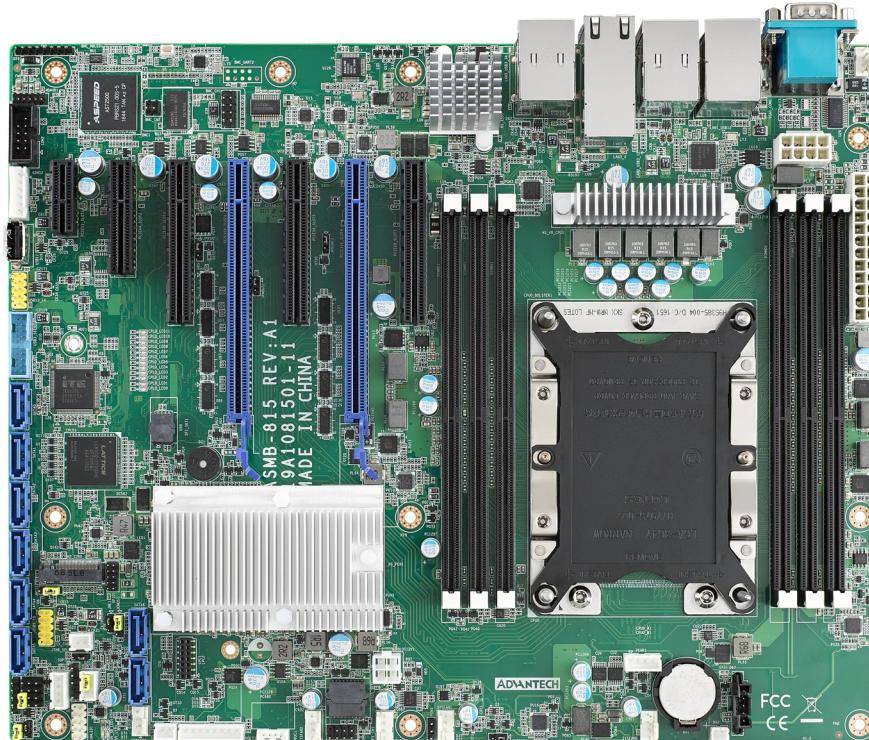

## Advantech PCE-5B12 BP with PCE-7129/PCE-5129 SHB

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	11				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	10				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7129/PCE-5129 (SHB), PCE-5B12-00A1 (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 10 PCIe ×16 2.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 2.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel C236 (PCE-7129) Intel Q170 (PCE-5129)				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz (PCE-7129/PCE-5129) (Advantech Part# 1960052651N021)				
<b>Heatsink for the CPU</b>	2U CPU cooler				
<b>System memory</b>	32 GB DDR4 ECC-RDIMM 2400 MHz				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.20 x64 Project version: 7129000CF60E201 (PCE-7129) Project version: 5129000QF60F201 (PCE-5129)				
<b>Power supply</b>	Single power supply (not included with the chassis): <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> </ul>				
<b>Chassis</b>	IPC-623 4U rackmount Chassis Part#: IPC-623BP-00XBE (for single power supply)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Once the Mura cards are installed in the system, install the hold down clamp. Make sure you insert the rubber cushions into the notches of the hold down clamp and adjust the rubber cushions to secure the cards into position. The rubber cushions protect the cards against shock and vibration. For more information, see the system / chassis manual.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ The single power supply must be ordered separately.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
P1PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P1PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P1PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P1PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P2PCIEX16_1	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P2PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P2PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PPCIEX4_1	Console display	F	Console Display	E	Empty (unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

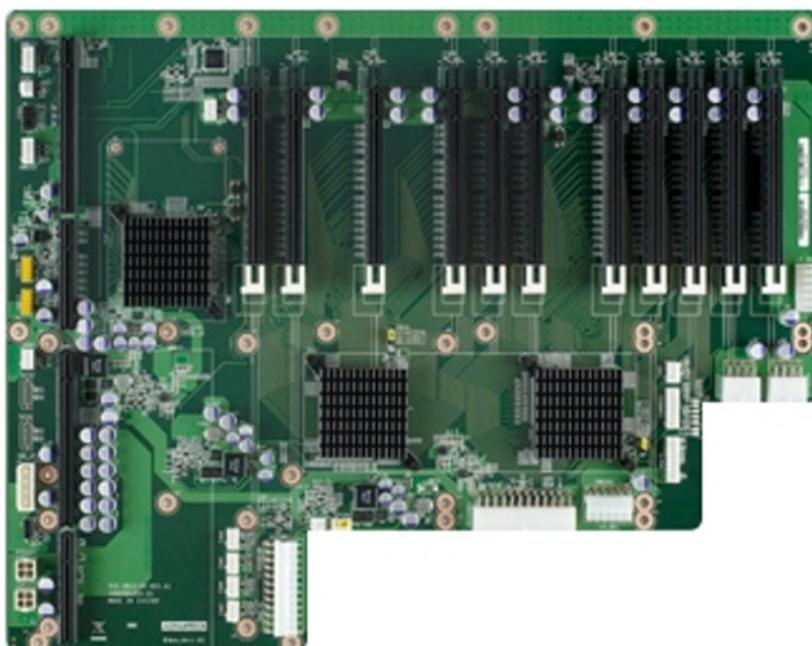

## Advantech PCE-5B19/PCE-5128

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	17				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	15				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	16				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-5128 (SHB) PCE-5B19-00A1E (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 17 PCIe ×16 3.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® Q87 (PCE-5128)				
<b>Processor</b>	Intel® Core™ i7-4770S, 3.10 GHz				
<b>Heatsink (for CPU)</b>	2U CPU cooler				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	Core version: 4.6.5.4 0.35 x64 Project version: PCE 5128XH01				
<b>Power supply</b>	Single power supply (not included with the chassis): <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul>				
<b>Power supply bracket</b>	Standard				
<b>Chassis</b>	IPC-623 4U rack mount <ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The maximum number of GPUs supported by Windows is 29.</li> <li>▪ The <b>P1PCIE1</b> ×4 slot is unusable due to the adjacent SHB slot.</li> <li>▪ The single power supply must be ordered separately.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Choose power cord with IEC C19 plug for chassis IPC-623BP-1KZC.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>P1PCIE_1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>P2PCIE_1</b>	Empty (Unusable)		Mura MPX-V16	D	Empty (Unusable)	
<b>P2PCIE_2</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>P3PCIE_1</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P3PCIE_2	MURAIPXI-D4JF	A,	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P3PCIE_3	MURAIPXI-D4JF	A,	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P3PCIE_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P3PCIE_5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_1	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P4PCIE_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_1	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, D	MURAIPXI-D4JF	A
P5PCIE_5	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

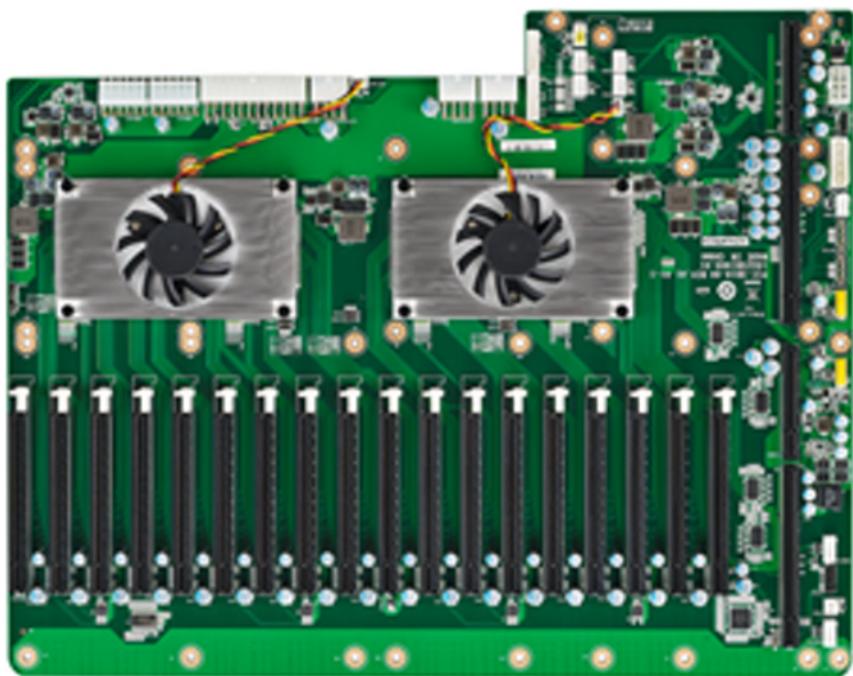

## Advantech PCE-5B19/PCE-5129

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	Yes
<b>Maximum number of cards supported</b>	16				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	Mura MPX Series only: 14 Mura MPX Series with a console display: 14 (plus a console display) Mura MPX Series + Mura IPX Series: 9 + 5				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	14				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-5129 (SHB) PCE-5B19-00A1E (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 17 PCIe ×16 3.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® Q170				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz				
<b>Heatsink (for CPU)</b>	2U CPU cooler				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.20 x64 Project version: 5129000QF60F201				
<b>Power supply</b>	<p>Single power supply (not included with the chassis):</p> <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul>				
<b>Power supply bracket</b>	Standard				
<b>Chassis</b>	<p>IPC-623 4U rack mount</p> <ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The maximum number of GPUs supported by Windows is 29.</li> <li>▪ The <b>P1PCIE_1</b> ×4 slot is unusable due to the adjacent SHB slot.</li> <li>▪ The single power supply must be ordered separately.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Choose power cord with IEC C19 plug for chassis IPC-623BP-1KZC.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>P1PCIE_1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>P2PCIE_1</b>	Empty (Unusable)		Console Display	E	Empty (Unusable)	
<b>P2PCIE_2</b>	C680		Empty (Unusable)		Third party graphics hardware	
<b>P3PCIE_1</b>	C680	A, C	Mura MPX-4/4	B	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P3PCIE_2	MURAIPXI-D4JF	A,	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P3PCIE_3	MURAIPXI-D4JF	A,	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P3PCIE_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P3PCIE_5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_1	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P4PCIE_2	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P4PCIE_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_1	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P5PCIE_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P5PCIE_5	Console display	F	Mura MPX-4/4	A, B, D	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

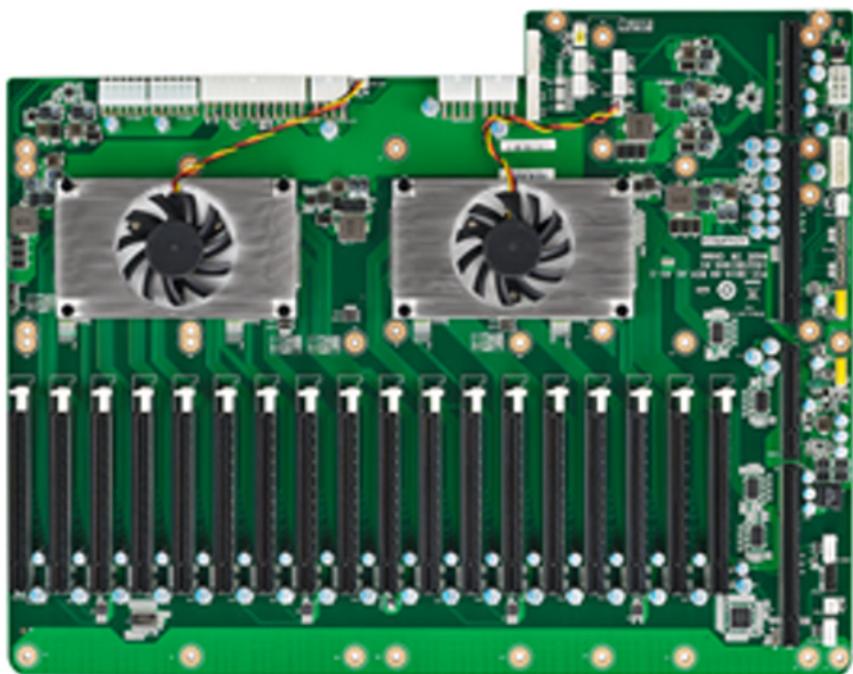

## Advantech PCE-5B19/PCE-7129

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	Yes
<b>Maximum number of cards supported</b>	16				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	Mura MPX Series only: 14 Mura MPX Series with a console display: 14 (plus a console display) Mura MPX Series + Mura IPX Series: 7 + 6				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	14				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	PCE-7129 (SHB) PCE-5B19-00A1E (Backplane)				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 17 PCIe ×16 3.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 1 PCIe ×16 3.0 slot (×16 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C236				
<b>Processor</b>	Intel® Core™ i7-6770S, 3.40 GHz				
<b>Heatsink (for CPU)</b>	2U CPU cooler				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	Core version: 5.0.1.2 0.20 x64 Project version: 7129000CF60E201				
<b>Power supply</b>	<p>Single power supply (not included with the chassis):</p> <ul style="list-style-type: none"> <li>▪ Enermax 1200W (Part#: EPF1200EW)</li> <li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li> <li>▪ 1200W (Advantech part # 96PS-A1K2WPS2)</li> </ul>				
<b>Power supply bracket</b>	Standard				
<b>Chassis</b>	<p>IPC-623 4U rack mount</p> <ul style="list-style-type: none"> <li>▪ Chassis Part#: IPC-623BP-00XBE</li> <li>▪ Chassis Part#: IPC-623BP-1KZC (for single power supply from Advantech)</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The maximum number of GPUs supported by Windows is 29.</li> <li>▪ The P1PCIE1 ×4 slot is unusable due to the adjacent SHB slot.</li> <li>▪ The single power supply must be ordered separately.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ The P2PCIE_1 &amp; P2PCIE_2 x16 slots can't use full-length PCIe cards due to a mechanical conflict with the SHB CPU heatsink.</li> <li>▪ Choose power cord with IEC C19 plug for chassis IPC-623BP-1KZC.</li> <li>▪ The chassis fans must remain at full speed.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P1PCIE_1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
P2PCIE_1	Empty (Unusable)		Console Display	E	Empty (Unusable)	
P2PCIE_2	C680		Empty (Unusable)		Third party graphics hardware	

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
P3PCIE_1	C680	A, C	Mura MPX-4/4	B	Third party graphics hardware	A
P3PCIE_2	MURAIPXI-D4JF	A,	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P3PCIE_3	MURAIPXI-D4JF	A,	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P3PCIE_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
P3PCIE_5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_1	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
P4PCIE_2	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P4PCIE_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P4PCIE_5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_1	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P5PCIE_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_3	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
P5PCIE_4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
P5PCIE_5	Console display	F	Mura MPX-4/4	A, B, D	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

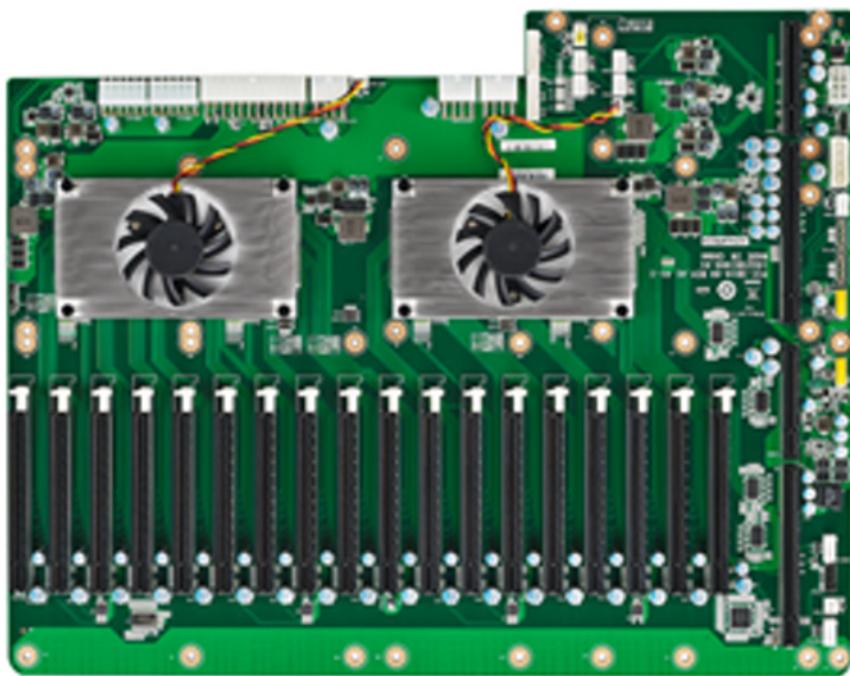

## ASUS® WS C422 PRO/SE

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	See note for console support				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Asus® WS C422 PRO/SE				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×8/×16 electrical)</li> <li>▪ 1 PCIe ×4 3.0 slot (×4 mechanical, ×4 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C422				
<b>Processor</b>	Intel® Xeon® W-2133 CPU @ 3.6GHz				
<b>Heatsink for the CPU</b>	LGA 2066 for Intel® Xeon-W series				
<b>System memory</b>	12 GB DDR4				
<b>System BIOS version</b>	0702, 2018-06-14				
<b>Power supply</b>	750W (P/N: EVGA Supernova 750G3)				
<b>Chassis</b>	Chenbro RM41300 FS81 (includes fans)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ To use the onboard graphics, make sure the 3-pin <b>VGA_SW1</b> jumper is set to <b>Enable</b> on the motherboard. Then install the VGA bracket cable that came with the motherboard in an empty slot and connect to the internal VGA connector <b>VGA_HDR1</b> on the motherboard.</li> <li>▪ Only onboard console support with C-Series based controller.</li> </ul>				


\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	—	—	Third party graphics hardware	
PCIEX16_2	C680	A,C	—	—	Third party graphics hardware	A
PCIEX4_1	Empty		—	—	Empty	
PCIEX16_3	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
PCIEX16_4	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
<b>Option</b>	<b>Product</b>					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

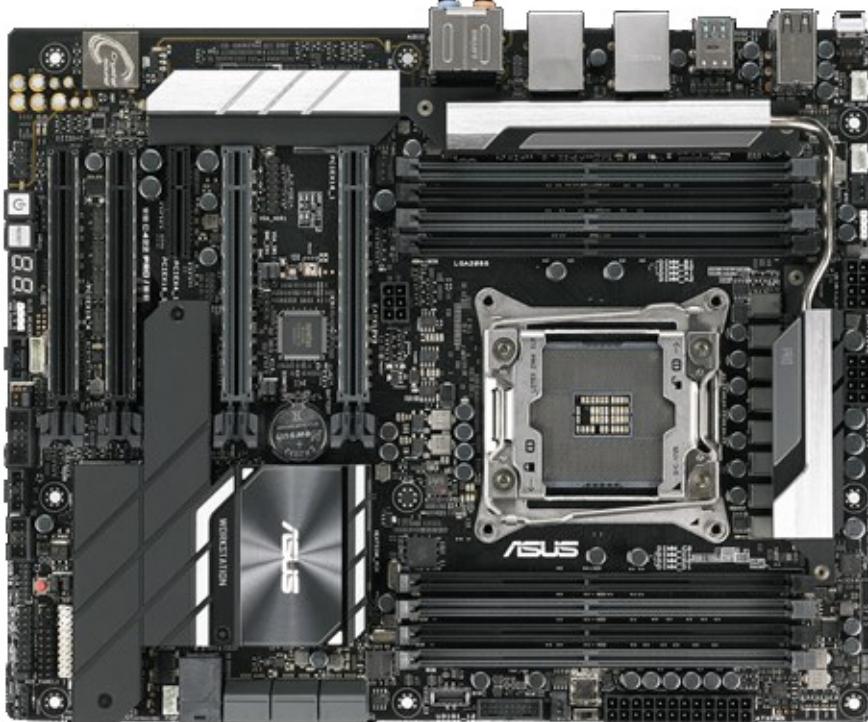

## ASUS® WS C422 SAGE/10G

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes (Requires 3.03 or later)	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	7				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	7				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Asus WS C422 SAGE/10G				
<b>PCIe expansion slots</b>	7 PCIe ×16 3.0 slots (×16 mechanical, ×16/x8 electrical)				
<b>Chipset</b>	Intel® C422				
<b>Processor</b>	Intel® Xeon W-2123 CPU @ 3.6GHz				
<b>Heatsink for the CPU</b>	LGA 2066				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	0905 2018-11-30				
<b>Power supply</b>	850W ( P/N:EVGA Supernova 850G3)				
<b>Chassis</b>	Chenbro RM41300-FS81 (includes fans)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ The chassis fan speed must be set to full speed. To change the fan speed, go to system BIOS main page (EZ mode), select <b>QFan Control</b>, select the header to which the fans are connected, change from <b>Standard</b> to <b>Full Speed</b>, and apply the changes.</li> <li>▪ In the system BIOS, go to <b>Advanced Mode</b> → <b>Boot</b>, then set <b>Above 4G Decoding</b> to <b>ON</b> and set <b>First VGA 4G Decode</b> to <b>Above_4G</b>.</li> <li>▪ <b>Windows 10</b> – In the system BIOS, go to <b>Advanced Mode</b> → <b>Boot</b> → <b>CSM Configuration</b> → <b>CSM</b> set to <b>Disable</b>.</li> <li>▪ <b>Windows 7</b> – In the system BIOS, go to <b>Advanced Mode</b> → <b>Boot</b> → <b>CSM Configuration</b> → <b>CSM</b> set to <b>Enable</b>.</li> <li>▪ Moving application windows on the console display may affect the performance of the video wall.</li> <li>▪ The system BIOS is available at <a href="ftp://c422_sage:RRCygpAK@privftp.matrox.com">ftp://c422_sage:RRCygpAK@privftp.matrox.com</a>.</li> </ul>				


\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX16_2	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A, B, D, E	MURAIPXI-D4JF	A
PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_6	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_7	C680	A, C	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

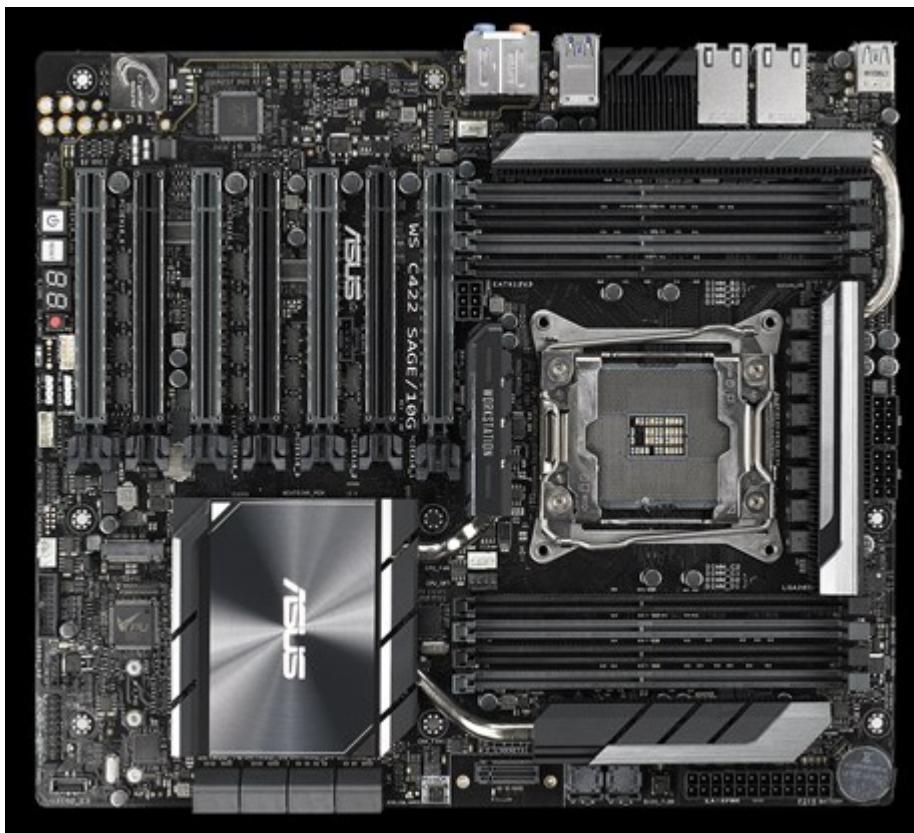

## ASUS® WS C621E SAGE

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes (requires 3.03 or later)	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	7				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	6 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	See note for console support.				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Asus WS C621E SAGE				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 3 PCIe ×16 3.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×8/×16 electrical)</li> <li>▪ 2 PCIe ×16 3.0 slot (×16 mechanical, ×8 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C621 PCH				
<b>Processor</b>	Intel® Xeon Bronze 3104 Dual CPU @ 1.70GHz				
<b>Heatsink for the CPU</b>	LGA 3647				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	5701				
<b>Power supply</b>	850W ( P/N:EVGA Supernova 850G3)				
<b>Chassis</b>	Chenbro RM41300-FS81 (includes fans)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ The chassis fan speed must be set to full speed. To change the fan speed, go to the system BIOS main page (EZ mode), select <b>QFan Control</b>, select the header to which the fans are connected, change from <b>Standard to Full Speed</b>, and apply the changes.</li> <li>▪ To use the onboard graphics, make sure the 3-pin VGA_SW1 jumper is set to <b>Enable</b> on the motherboard. Then, install the VGA bracket cable that came with the motherboard in an empty slot and connect to the internal VGA connector VGA_HDR1 on the motherboard.</li> <li>▪ In the system BIOS, go to <b>Advanced Mode → Boot → CSM Configuration</b> → make sure <b>CSM</b> is set to <b>Disable</b></li> <li>▪ In the system BIOS, go to <b>Advanced Mode → PCI Subsystem settings</b>, then make sure <b>Above 4G Decoding</b> is set to <b>Enable</b> and <b>First VGA 4G Decode to Above_4G</b>.</li> <li>▪ Only onboard console support with C-Series based controller.</li> <li>▪ The console display should never be set as the primary display in Windows.</li> <li>▪ Moving application windows on the console display may affect the performance of your video wall.</li> </ul>				

\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	—	—	Third party graphics hardware	
PCIEX16_2	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
PCIEX16_3	MURAIPXI-D4JF	A	—	—	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
PCIEX16_5	MURAIPXI-D4JF	A	—	—	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_6</b>	MURAIPXI-D4JF	A	—	—	Third party graphics hardware	A
<b>PCIEX16_7</b>	C680	A, C	—	—	MURAIPXI-D4JF	A
Option	<b>Product</b>					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
<b>C</b>	C900 or C680					
<b>D</b>	Mura MPX-V16 or MPX-V8					
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

### Motherboard layout



## ASUS® WS X299 SAGE

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	7				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	7				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Asus® WS X299 SAGE				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 1 PCIe ×16 3.0 slots (×16 mechanical, ×16 electrical)</li> <li>▪ 3 PCIe ×16 3.0 slots (×16 mechanical, ×8/×16 electrical)</li> <li>▪ 3 PCIe ×8 3.0 slot (×16 mechanical, ×8 electrical)</li> </ul>				
<b>Chipset</b>	Intel® X299				
<b>Processor</b>	Intel® Core i9-7900X @ 3.30GHz; X-series 44 lane CPU				
<b>CPU Heatsink</b>	LGA 2066-4				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	0905, 2018.11.30				
<b>Power supply</b>	850W ( P/N:EVGA Supernova 850G3)				
<b>Chassis</b>	Chenbro RM41300-FS81 (includes fans)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ The chassis fan speed must be set to full speed. To change the fan speed, go to system BIOS main page (EZ mode) → select QFan Control → Select the header to which the fans are connected → change from Standard to Full Speed and apply the changes.</li> <li>▪ In the system BIOS, go to Advanced Mode → Boot, then set Above 4G Decoding to ON and set First VGA 4G Decode to Above_4G.</li> <li>▪ The console display should never be set as the primary display in Windows.</li> <li>▪ System BIOS available at <a href="ftp://asusbiosx299:5eyidt85@privftp.matrox.com">ftp://asusbiosx299:5eyidt85@privftp.matrox.com</a>.</li> </ul>				


\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	MURA MPX-4/4	B	Third party graphics hardware	
PCIEX16_2	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A, B, D, E	MURAIPXI-D4JF	A
PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	MURA MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_5	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
PCIEX16_6	MURAIPXI-D4JF	A	MURA MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_7	C680	A, C	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

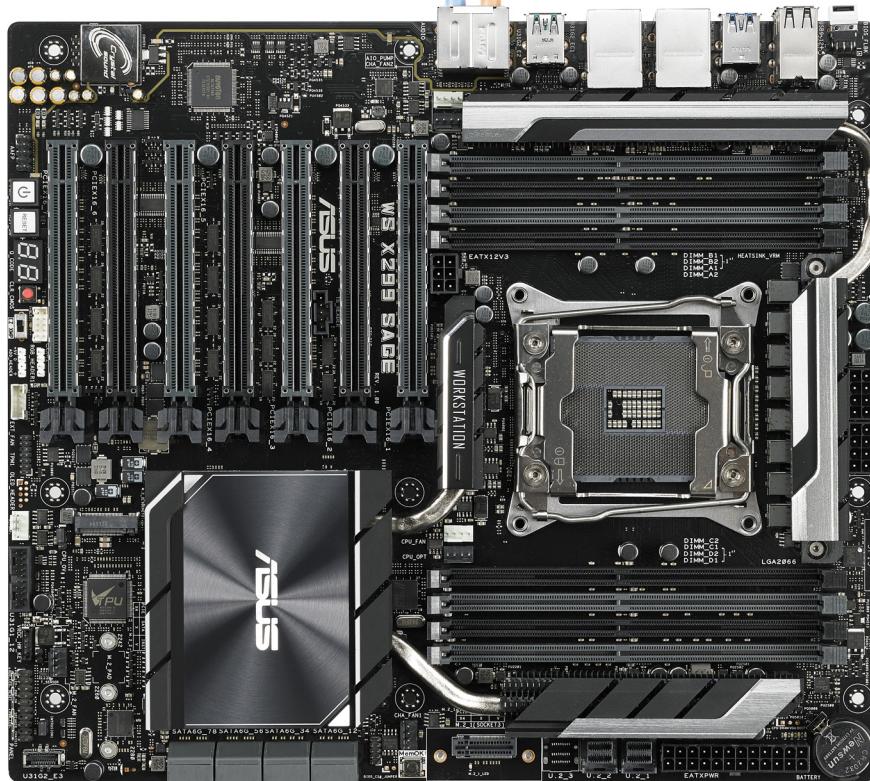

## ASUS® WS Z390 PRO

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>		3 (Only Mura IPX Series)			
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>		See note for console support			
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASUS WS Z390 PRO				
<b>PCIe expansion slots</b>		<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0 slots (×16 mechanical, ×8/×16 electrical)</li> <li>▪ 1 PCIe ×4 3.0 slot</li> </ul>			
<b>Chipset</b>	Intel Z390				
<b>Processor</b>	Intel Core i5-9600K CPU @3.70 GHz				
<b>System memory</b>	8GB DDR4				
<b>CPU Heatsink</b>	LGA 1151				
<b>System BIOS version</b>	0701				
<b>Power supply</b>	Corsair CS5450M Optional power supply required for maximum support of third party graphics hardware.				
<b>Chassis</b>	Norco RPC-432 (4U short depth rackmount case)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The chassis fan speed must be set to full speed. To change the fan speed, go to system BIOS main page (EZ mode), select QFan Control → select the header to which the fans are connected, then change from Standard to Full Speed and apply the changes.</li> <li>▪ Optional chassis rear fans 2×80mm must be ordered separately.</li> <li>▪ Only onboard console support with C-Series based controller.</li> <li>▪ Mura MPX Series based controllers are unsupported with Intel® seventh generation desktop processors onwards.</li> </ul>				

\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	—		Third-party graphics hardware	
PCIEX16_2	MURAIPXI-D4JF	A,C	—		MURAIPXI-D4JF	A
PCIEX4_1	Empty		—		Empty	
PCIEX16_3	C680	A	—		Third-party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	—		MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680

Option	Product
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout



## GIGABYTE™ MW51-HPO

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	7				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	6				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	MW51-HPO				
<b>PCIe expansion slots</b>	1 PCIe ×16 3.0 slot (x16 mechanical and electrical) 3 PCIe ×16 3.0 slots (x16 mechanical, ×16/x8 electrical) 3 PCIe ×16 3.0 slots (x16 mechanical, x8 electrical)				
<b>Chipset</b>	Intel® C422				
<b>Processor</b>	Intel® Xeon W-2123 3.60 GHz				
<b>Heatsink (for CPU)</b>	LGA2066				
<b>System memory</b>	16GB				
<b>System BIOS version</b>	F12				
<b>Power supply</b>	860W (iStar USA P/N: TC-860PD8)				
<b>Chassis</b>	iStarUSA (P/N: D-400L-7) The center fan at the rear of the chassis must be disconnected.				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ System BIOS available at <a href="ftp://Gigabyte:Hv9LFYh8@privftp.matrox.com">ftp://Gigabyte:Hv9LFYh8@privftp.matrox.com</a>.</li> <li>▪ In the System BIOS, select Advanced → Hardware Monitor → CPU fan speed control, then set all the system fan speed controls to Full speed.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIe ×16 Slot1</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B	Third party graphics hardware	A
<b>PCIe ×8 Slot2</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B	MURAIPXI-D4JF	A
<b>PCIe ×16 Slot3</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B	Third party graphics hardware	A
<b>PCIe ×8 Slot4</b>	C680	A, C	Mura MPX-4/4	B	MURAIPXI-D4JF	A
<b>PCIe ×16 Slot5</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B	Third party graphics hardware	A
<b>PCIe ×8 Slot6</b>	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A
<b>PCIe ×16 Slot7</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI

Option	Product
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

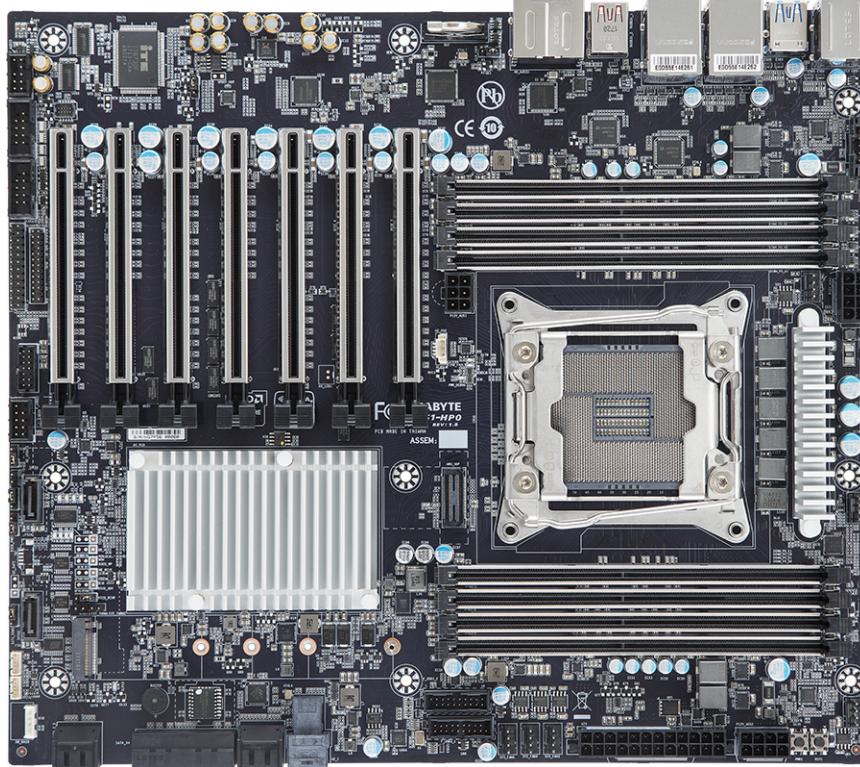

## MSI X299 SLI PLUS

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	3				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	MSI X299 SLI PLUS				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 3.0 slots (x16 mechanical and electrical)</li> <li>▪ 1 PCIe x16 3.0 slot (X16 mechanical, x8 electrical)</li> <li>▪ 1 PClex16 3.0 slot (x16 mechanical, x4 electrical)</li> </ul>				
<b>Chipset</b>	Intel X299				
<b>Processor</b>	Intel Core i9-7900X @3.30GHz; X-series 44-lane CPU				
<b>Heatsink for the CPU</b>	LGA 2066				
<b>System memory</b>	32 GB DDR4				
<b>System BIOS version</b>	E7A93IMS.170				
<b>Power supply</b>	650 W (Part# : Antec EA-650 GREEN)				
<b>Chassis</b>	Chenbro RM41300-FS81 (includes fans)				
<b>Notes</b>	The chassis must be ordered from Chenbro. Power supply isn't included with the chassis				

\* Maximum of 1 console per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCI_E1 x16</b>	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
<b>PCI_E2 x1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCI_E3 x4</b>	Console Display	F	Console Display	E	Empty (Unusable)	
<b>PCI_E4 x16</b>	C680	A, C	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
<b>PCI_E5 x1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>PCI_E6 x8</b>	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

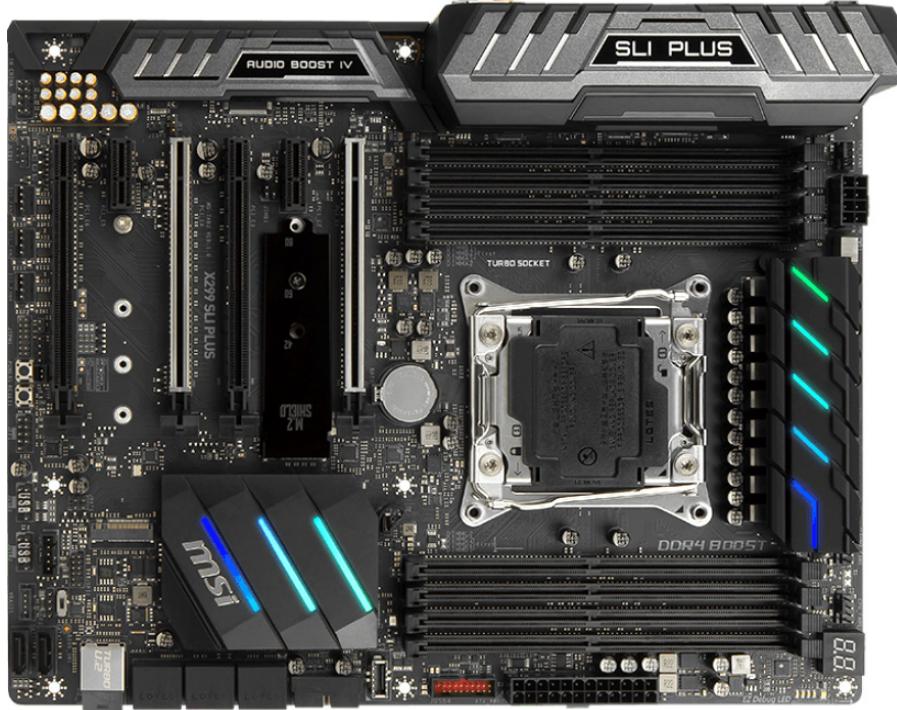

## Portwell® M9010A (with ROBO-8110A SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	10				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	9				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Portwell ROBO-8110A (SHB), PBPE-11A-MT (Backplane)				
<b>PCIe expansion slots</b>	10 PCIe ×16 2.0 slots (×16 mechanical and electrical)				
<b>Chipset</b>	Intel® C206 (ROBO-8110A SHB)				
<b>Processor</b>	Intel® Core™ i3-2120 dual-core processor or Intel® Xeon® E3-1200 Series quad-core processor ()				
<b>Heatsink (for CPU)</b>	Low-profile 1U passive heatsink				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1APBB 0.04 ×64				
<b>Power supply</b>	950W redundant PSU (not included – Portwell Part# 02-527050-0002)				
<b>Power supply bracket</b>	Standard				
<b>Chassis</b>	Industrial 4U rack mount (not included – Portwell Part# 21-M90104-0012)				
<b>Expansion slot configuration</b>	Insert the Mura cards in the available PCIe ×16 slots.				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional system memory upgrade is available.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
J2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J4	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J5	MURAIPXI-D4JF	A	Mura MPX_4/4	A, B, D	Third party graphics hardware	A
J6	C680	A, C	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J7	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J8	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J9	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J10	MURAIPXI-D4JF	A,F	MURAIPXI-D4JF	A, B, D, E	MURAIPXI-D4JF	A
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)					
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)					

## Portwell® M9010A (with ROBO-8113-VG2AR SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes (Requires Mura driver version 3.01 or later)	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	10				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	10				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	8				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Portwell ROBO-8113VG2AR (SHB) Portwell PBPE-11A-MT (Backplane)				
<b>PCIe expansion slots</b>	10 PCIe ×16 2.0 slots (×16 mechanical and electrical)				
<b>Chipset</b>	Intel® C236				
<b>Processor</b>	Intel® Core™ i3-6100 @3.7GHz				
<b>Heatsink (for CPU)</b>	LGA 1151				
<b>System memory</b>	16 GB DDR4				
<b>System BIOS version</b>	R1.00.E0 (12/19/2019) - C-Series Controllers R1.00.E1 (01/28/2019) - Mura MPX Controllers				
<b>Power supply</b>	950W redundant PSU (not included – Portwell Part# 02-527050-0002)				
<b>Power supply bracket</b>	Standard				
<b>Chassis</b>	Industrial 4U rack mount (not included – Portwell Part# 21-M90104-0012)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional system memory upgrade is available.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Mura MPX Controllers: The system BIOS is available at <a href="ftp://PortwellBIOS:RVHdu3GW@privftp.matrox.com">ftp://PortwellBIOS:RVHdu3GW@privftp.matrox.com</a>.</li> <li>▪ C-Series Controllers: The system BIOS is available at <a href="ftp://portwell_bios:xQGnkWnQ@privftp.matrox.com">ftp://portwell_bios:xQGnkWnQ@privftp.matrox.com</a>.</li> <li>▪ Portwell system BIOS files with “-MT” are custom BIOS versions specific to Matrox configurations.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
J2	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
J4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J5	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J6	C680	A, C	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
J7	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J8	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	MURAIPXI-D4JF	A
J9	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
J10	MURAIPXI-D4JF	A, F	Mura MPX-4/4	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

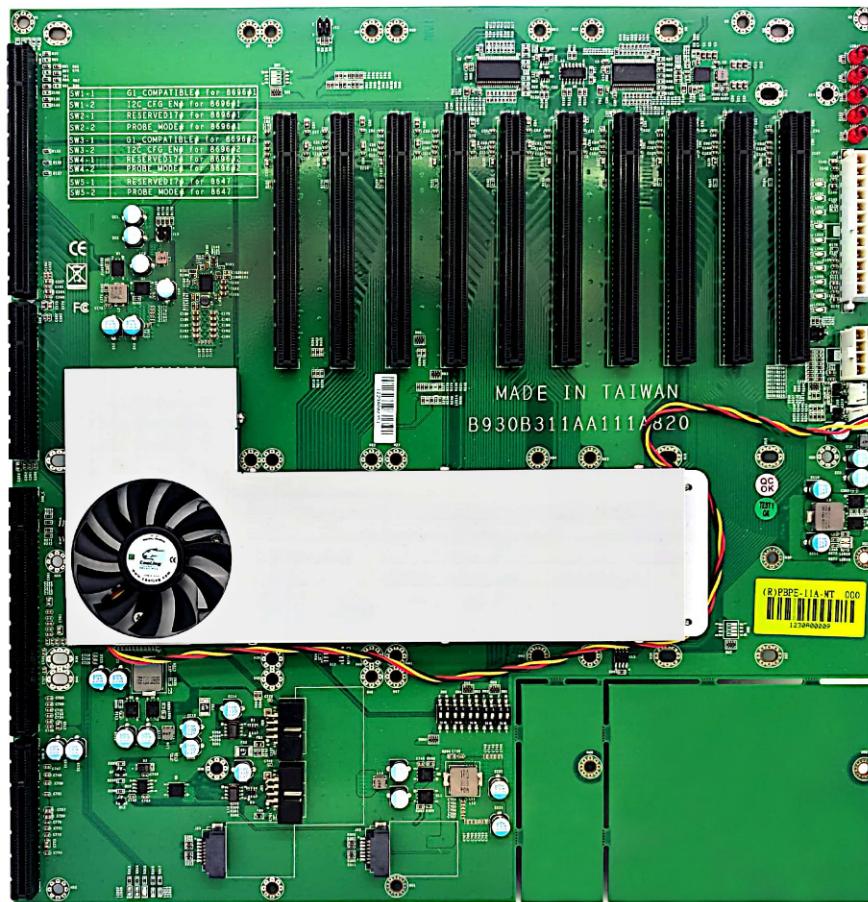

## Portwell® M9010A (with ROBO-8113VG2AR-Q170-KBL SHB)

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	10				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	9 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	See note for console support.				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Portwell ROBO-8113VG2AR-Q170-KBL-PCIE4 (SHB) Portwell PBPE-11A-MT (Backplane)				
<b>PCIe expansion slots</b>	10 PCIe ×16 2.0 slots (×16 mechanical and electrical)				
<b>Chipset</b>	Intel® Q170				
<b>Processor</b>	Intel® Core™ i7-7700 @3.6GHz				
<b>Heatsink (for CPU)</b>	LGA 1151				
<b>System memory</b>	16 GB				
<b>System BIOS version</b>	R1.00.E0 (12/19/2019)				
<b>Power supply</b>	950W redundant PSU (not included – Portwell Part# 02-527050-0002)				
<b>Power supply bracket</b>	Standard				
<b>Chassis</b>	Industrial 4U rack mount (not included – Portwell Part# 21-M90104-0012)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional system memory upgrade is available.</li> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ In the system BIOS → Advanced → Graphics Configuration → Internal Graphics → select Disabled.</li> <li>▪ In the system BIOS → Advanced → Chipset Configuration → Above 4G Decoding → select Disabled.</li> <li>▪ In the system BIOS → Advanced → Chipset Configuration → Above 4G MMIO BIOS Assignment → select Disabled.</li> <li>▪ No console support with C-Series controllers.</li> <li>▪ The system BIOS is available at <a href="ftp://portwell_bios_q170:rPDP2h1D@privftp.matrox.com">ftp://portwell_bios_q170:rPDP2h1D@privftp.matrox.com</a>.</li> <li>▪ Portwell system BIOS files with “-MT” are custom BIOS versions specific to Matrox configurations.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J1	C680	C			Third party graphics hardware	
J2	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A
J3	MURAIPXI-D4JF	A			Third party graphics hardware	A
J4	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A
J5	MURAIPXI-D4JF	A			Third party graphics hardware	A
J6	C680	A, C			MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
J7	MURAIPXI-D4JF	A			Third party graphics hardware	A
J8	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A
J9	MURAIPXI-D4JF	A			Third party graphics hardware	A
J10	MURAIPXI-D4JF	A			MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

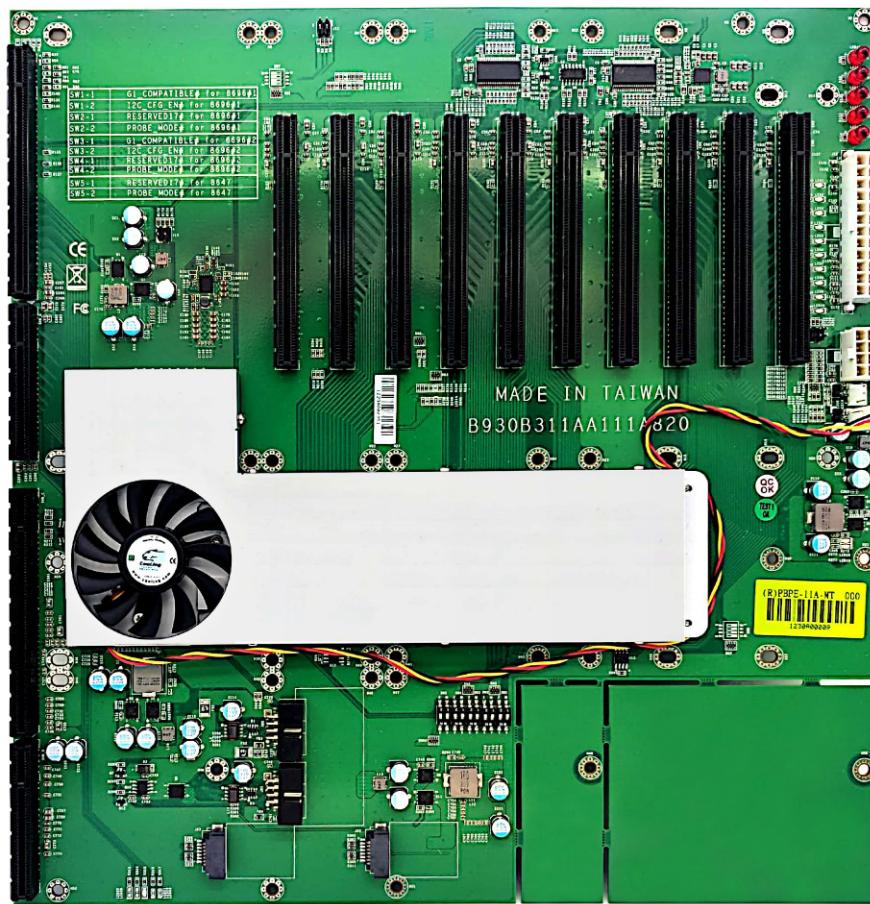

## SUPERMICRO® C9Z390-PWG

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3 (Only Mura IPX Series)				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	See note for console support				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	SUPERMICRO® C9Z390-PGW				
<b>PCIe expansion slots</b>	4 PCIe ×16 3.0 slots (x16 mechanical, x8/x16 electrical)				
<b>Chipset</b>	Intel® Z390				
<b>Processor</b>	Intel® Core i7-9700K CPU @3.60 GHz				
<b>System memory</b>	8GB DDR4				
<b>CPU Heatsink</b>	LGA 1151				
<b>System BIOS version</b>	1.0a, 2018-09-21				
<b>Power supply</b>	CORSAIR CS550M Optional power supply required for maximum support of third party graphics hardware.				
<b>Chassis</b>	Norco RPC-432 (4U short depth rackmount case)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The chassis fan speed must be set to full speed. To change the fan speed, go to system BIOS main page (Advanced mode), select H/W Monitor → Fan Control Setting and change the Fan Speed Control Mode to Full Speed and apply the changes.</li> <li>▪ Optional chassis rear fans 2x80mm must be ordered separately.</li> <li>▪ Only onboard console support with C-Series based controller.</li> <li>▪ Mura MPX Series based controllers are unsupported with Intel 7th generation desktop processors onwards.</li> </ul>				


\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>CPUSLOT1P CI-E 3.0 X8</b>	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
<b>CPUSLOT3P CI-E 3.0 X16</b>	C680	C	—	—	Third party graphics hardware	—
<b>PCHSLOT4P CI-E 3.0 X1</b>	Empty	—	—	—	Empty	—
<b>CPUSLOT5P CI-E 3.0X8</b>	MURAIPXI-D4JF	A	—	—	MURAIPXI-D4JF	A
<b>CPUSLOT7P CI-E 3.0X16</b>	C680	A, C	—	—	Third party graphics hardware	A
Option	Product					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					

Option	Product
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

### Motherboard layout

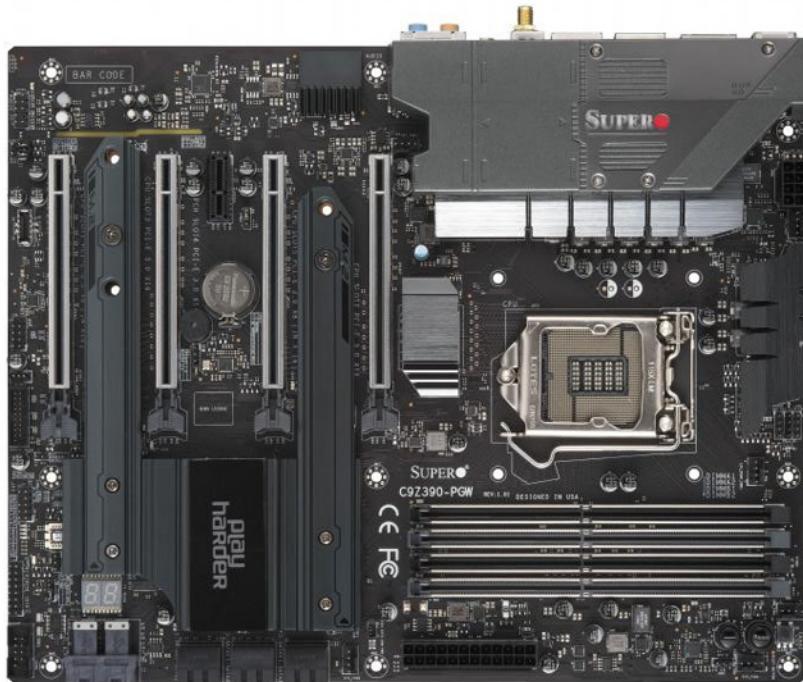

## SUPERMICRO® H11SS-i

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	No	No	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>		3 (Only Mura IPX Series )			
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>		See note for console support			
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>		SUPERMICRO® H11SSL-i			
<b>PCIe expansion slots</b>		<ul style="list-style-type: none"> <li>▪ 3 PCIe x16 3.0 slots</li> <li>▪ 3 PCIe x8 3.0 slots</li> </ul>			
<b>Chipset</b>		System on Chip			
<b>Processor</b>		AMD EPYC 7251 8-Core Processor, 2100 Mhz			
<b>System memory</b>		32 GB DDR4			
<b>CPU heatsink</b>		Socket SP3			
<b>System BIOS version</b>		1.0b, 2018-04-27			
<b>Power supply</b>		850W ( P/N:EVGA Supernova 850G3)			
<b>Chassis</b>		Chenbro RM41300-FS81 (includes fans)			
<b>Notes</b>		<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ In the system BIOS main page (Advanced mode), select <b>PCIe/PCI/PnP Configuration</b> → <b>M.2 PClex4 OPROM</b> → <b>Disable</b>.</li> <li>▪ Only onboard console support with C-Series based controller.</li> <li>▪ Mura MPX Series based controllers are unsupported with AMD EPYC 7000 series processors.</li> </ul>			


\* Maximum of 1 console per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>CPUSLOT1P CI-E 3.0 X8</b>	MURAIPXI-D4J	A	—		MURAIPXI-D4JF	A
<b>CPUSLOT2P CI-E 3.0 X16</b>	MURAIPXI-D4J	A	—		Third party graphics hardware	
<b>CPUSLOT3P CI-E 3.0 X8</b>	Empty (unusable)		—		Empty (unusable)	
<b>CPUSLOT4P CI-E 3.0X16</b>	C680	C	—		Third party graphics hardware	A
<b>CPUSLOT5P CI-E 3.0X8</b>	Empty (unusable)		—		Empty (unusable)	
<b>CPUSLOT6P CI-E 3.0X16</b>	C680	A, C	—		Third party graphics hardware	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

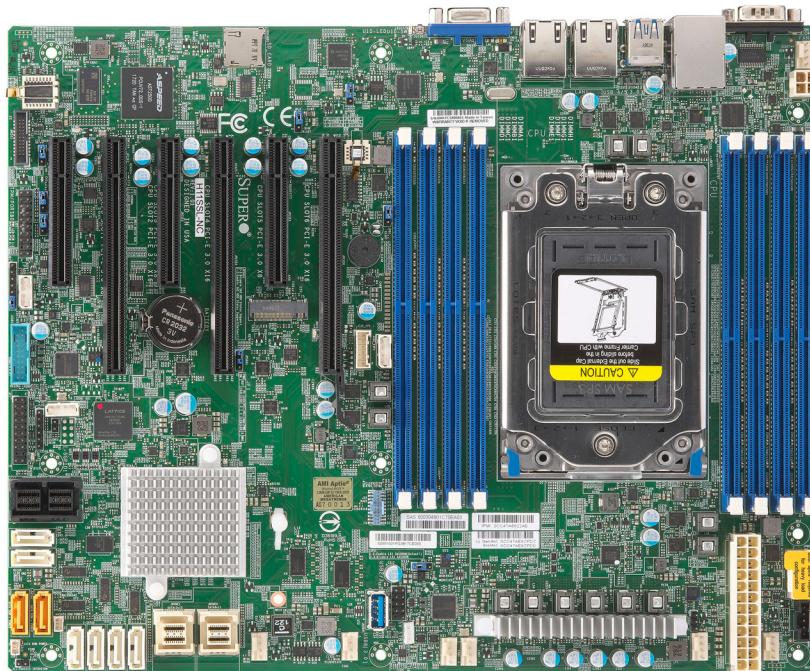

## EOL (End of Life) motherboards

### ASUS® X99-A II

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	3				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASUS® X99-A II				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 3 PCIe ×16 3.0/2.0 slots (one ×16, two ×16/×8, three ×8/×8/×8)</li> <li>▪ 1 PCIe ×16 2.0 slot (maximum ×4 mode)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul>				
<b>Chipset</b>	Intel® X99				
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ Intel® Core™ i7-6800K, 3.3 GHz (28 lane CPU)</li> </ul>				
<b>Heatsink (for CPU)</b>	LGA 2011-V3				
<b>System memory</b>	8 GB DDR4, 2133 MHz				
<b>System BIOS version</b>	3902				
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>				
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ Chenbro RM41300-FS81 (includes fans)</li> </ul>				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1 card → ×16</li> <li>▪ 2 cards → 1 ×16 + 1 ×8</li> <li>▪ 3 cards → 3 ×8</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Chenbro – The chassis must be ordered from Chenbro.</li> <li>▪ iStarUSA – The power supply must be ordered from iStarUSA.</li> <li>▪ For more information on supported chassis, see “Validated chassis”, page 179.</li> </ul>				


\* Maximum of 1 console display per system.

### Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX16_2	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEX16_3	MURAIPXI-D4JF	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIEX16_5	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEX16_6	Console display	F	Console display	E	Empty (Unusable)	

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

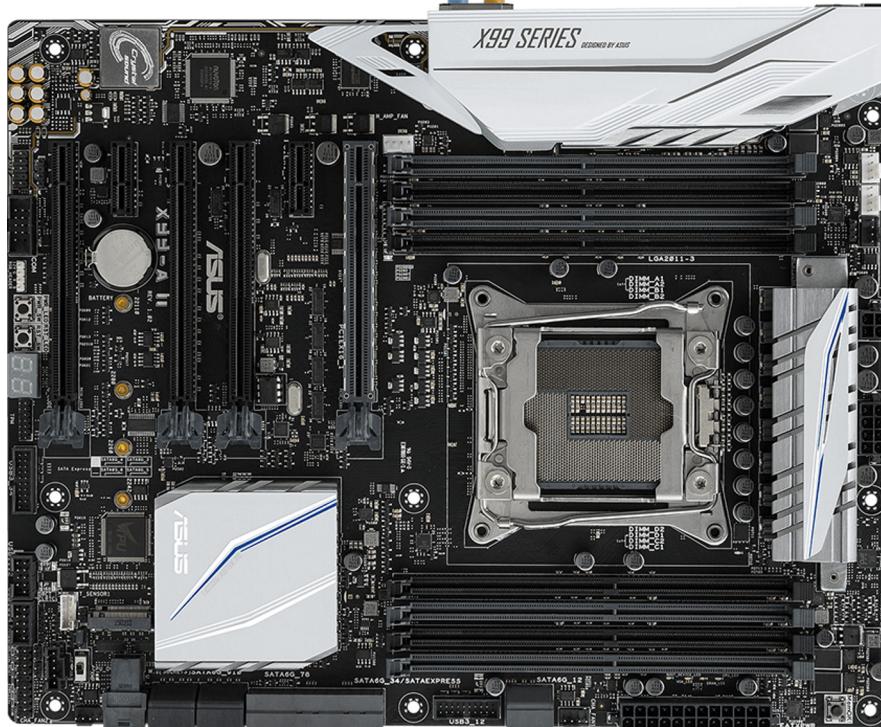

## ASUS® X99-DELUXE II

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	4				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	3				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASUS® X99-DELUXE II				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe 3.0/2.0 ×16 slots (one ×16, one ×16×16, one ×16×16/×8, one ×8/×8/×8/×8)</li> <li>▪ 1 PCIe 2.0 ×16 slot (×1 mode)</li> <li>▪ 1 PCIe 2.0 ×16 slot (maximum ×4 mode)</li> <li>▪ 1 PCIe 2.0 ×1</li> </ul>				
<b>Chipset</b>	Intel® X99				
<b>Processor</b>	Intel® Xeon™ E5-1620 V4 @ 3.5 GHz (40 lane CPU)				
<b>Heatsink (for CPU)</b>	LGA 2011-V3				
<b>System memory</b>	8 GB DDR4				
<b>System BIOS version</b>	1902				
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP) <b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>				
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>				
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “<a href="#">Approved fans for iStarUSA® D-400-2F80 chassis</a>”, page 192.</li> </ul>				
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2 <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DDFANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> </ul>				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 2 ×16 + 1 ×8</li> <li>▪ 4 cards → ×8</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ You need to change the default BIOS settings. Under <b>Advance Mode</b>, select <b>Tool</b>, then set the bandwidth of the <b>PCIEX16_5 slot</b> (black) to <b>x8 Mode</b>-AMI. This enables the slot to run in ×8 mode.</li> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “<a href="#">Approved fans for iStarUSA® D-400-2F80 chassis</a>”, page 192.</li> <li>▪ For more information on supported chassis, see “<a href="#">Validated chassis</a>”, page 179.</li> </ul>				

\* Maximum of 1 console display per system.


## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX16_2	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIEX16_3	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
PCIEX16_5	MURAIPXI-D4JF	A, F	Mura MPX-4/4	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
C	C900 or C680
D	Mura MPX-V16 or MPX-V8
E	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
F	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout

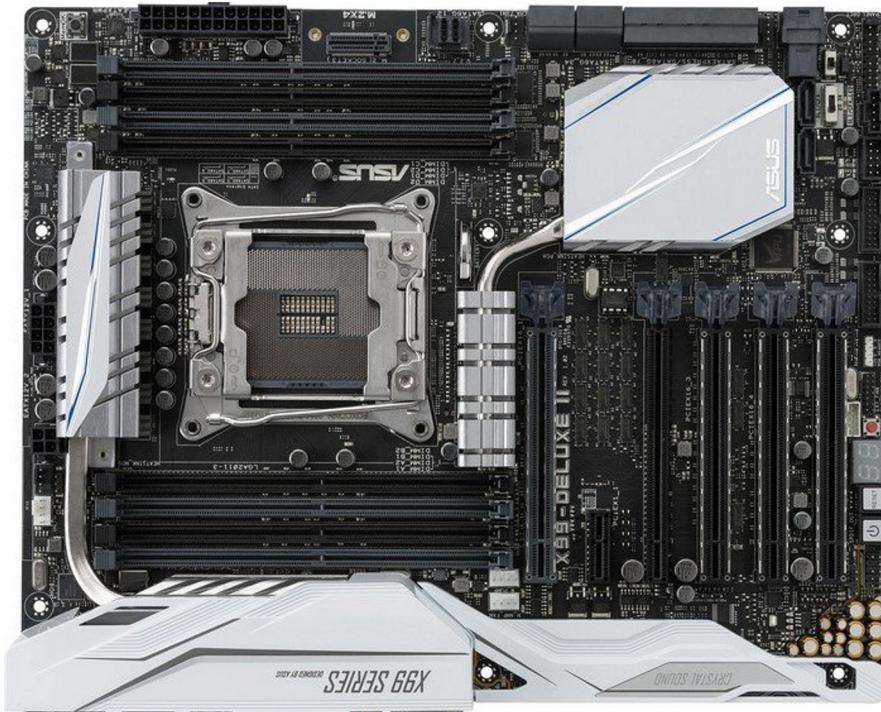

## ASUS® X99-E WS/USB 3.1

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	Yes	Yes	Yes	No foreseeable compatibility issues
<b>Maximum number of cards supported</b>	7				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	7				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	6				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASUS® X99-E WS/USB 3.1				
<b>PCIe expansion slots</b>	7 PCIe ×16 3.0/2.0 slots				
<b>Chipset</b>	Intel® X99				
<b>Processor</b>	Intel® Core™ i7-5930K, 3.5 GHz / i7-6850K, 3.60 GHz				
<b>System memory</b>	8 GB DDR4, up to 32 GB DDR4				
<b>System BIOS version</b>	3601				
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> <li><b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>				
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>				
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>				
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> </ul>				
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ We recommend updating your system with the ASUS BIOS available from the Matrox FTP site (<a href="http://asusbios:9lwMwTaD@privftp.matrox.com">http://asusbios:9lwMwTaD@privftp.matrox.com</a>).</li> <li>▪ In the system BIOS, go to Advanced Mode → Boot → Set Above 4G Decoding to Disabled.</li> <li>▪ For more information on supported chassis, see “Validated chassis”, page 179.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX16_2	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>PCIEX16_3</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_4</b>	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
<b>PCIEX16_5</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_6</b>	MURAIPXI-D4JF	A	Mura MPX-4/4	A, B, D	MURAIPXI-D4JF	A
<b>PCIEX16_7</b>	MURAIPXI-D4JF	A, F	Mura MPX-4/4	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Motherboard layout



## ASUS® Z270-WS

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	Yes	Yes	Yes	Yes
<b>Maximum number of cards supported</b>	4				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	4				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	3				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	ASUS Z270-WS				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4x PCIe® 3.0/2.0 ×16</li> <li>▪ 1x PCIe® ×4</li> </ul>				
<b>Chipset</b>	Intel® Z270				
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ <b>C-Series based Controller</b> – Intel® Core i5-7600K, 3.5 GHz (16 lane CPU)</li> <li>▪ <b>Mura MPX Series based controller</b> – Intel® Core i7-6700K, 3.4 GHz (16 lane CPU)</li> </ul>				
<b>System memory</b>	8 GB DDR4				
<b>System BIOS version</b>	0801				
<b>Power supply</b>	550 W (P/N: Corsair CS550M) Optional power supply required for maximum support of third party graphics hardware.				
<b>Power supply bracket</b>	Standard bracket included with the chassis.				
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ Included with chassis: 120 mm × 3 fans (Model: DD-FAN120B)</li> <li>▪ Included with chassis: 80 mm × 1 fan (Model: DD-FAN80)</li> </ul>				
<b>Chassis</b>	iStarUSA (P/N: D-400L-7)				
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on power requirements, see the documentation for your third party graphics hardware.</li> <li>▪ Mura MPX Series based controllers are unsupported with 7th generation desktop processors.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCIEX16_1	C680	C	Mura MPX-4/4	B	Third party graphics hardware	
PCIEX16_2	C680	A, C	Mura MPX-4/4	A, B, D	Third party graphics hardware	A
PCIEX4_1	Empty (unusable)		Empty (unusable)		Empty (unusable)	
PCIEX16_3	MURAIPXI-D4JF	A	MURAIPXI-D4JF	A, B, D	Third party graphics hardware	A
PCIEX16_4	MURAIPXI-D4JF	A, F	MURAIPXI-D4JF	A, B, D, E	MURAIPXI-D4JF	A

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI

Option	Product
<b>C</b>	C900 or C680
<b>D</b>	Mura MPX-V16 or MPX-V8
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Advantech ASMB-781G4-00A1E

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
Validated	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	3				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	3				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Advantech ASMB-781G4-00A1E				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe x16 2.0 slots</li> <li>▪ 1 PCIe x4 2.0 slot</li> <li>▪ 1 PCIe x1 2.0 slot</li> </ul>				
<b>Chipset</b>	Intel® C206				
<b>Processor</b>	Intel® Xeon® E3-1275 processor				
<b>Heatsink (for CPU)</b>	Advantech LGA1155 CPU Heat Sink (P/N: 1960047669N001)				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1.10				
<b>Chassis</b>	IPC-7130-00XE				
<b>Power supply</b>	PS-400ATX-ZE (400W 80 PLUS PS/2 PSU)				
<b>Power supply bracket</b>	Standard				
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first Mura card in the blue slot labeled <b>PCIE6</b>.</li> <li>▪ Insert the second Mura card in the blue slot labeled <b>PCIE4</b>.</li> </ul>				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
PCI1	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCI2	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE3	Console display	F	Mura MPX-V8	D, E	Empty	
PCIE4	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
PCI5	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
PCIE6	MURAIPXI-D4JF	A, C	Mura MPX-4/4	B	MURAIPXI-D4JF	A
Option	Product					
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
B	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
C	C900 or C680					
D	Mura MPX-V16 or MPX-V8					

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## Advantech ASMB-820I-00A1E

	Mura MPX Series	Mura MPX + IPX Series	C-Series	C-Series + Mura IPX Series	Third party + Mura IPX Series
<b>Validated</b>	Yes	No foreseeable compatibility issues			
<b>Maximum number of cards supported</b>	3				
<b>Maximum supported Mura MPX-4/4, MPX-4/2, MPX-4/0, and/or IPX Series</b>	2				
<b>Maximum supported Mura MPX-V8, MPX-V16 and/or console display*</b>	2				
<b>Maximum supported C900/C680</b>	2				
<b>Motherboard</b>	Advantech ASMB-820I-00A1E				
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots (×16 mechanical, ×16 and ×8 electrical)</li> <li>▪ 1 PCIe ×4 2.0 slot (×4 mechanical, ×4 electrical)</li> <li>▪ 1 PCIe ×1 2.0 slot (×1 mechanical, ×1 electrical)</li> </ul>				
<b>Chipset</b>	Intel® C206J				
<b>Processor</b>	Intel® Xeon® E5-2420 processor				
<b>Heatsink (for CPU)</b>	Advantech LGA1356 CPU Heat Sink (P/N: 19600555362N011)				
<b>System memory</b>	8 GB DDR3				
<b>System BIOS version</b>	1.10				
<b>Power supply</b>	80 PLUS 500W PSU (PS8-500ATX-ZE)				
<b>Chassis</b>	ACP-4000MB-00XE				
<b>Power supply bracket</b>	Standard				

\* Maximum of 1 console display per system.

## Configurations

Slot	C-Series based controller		Mura MPX Series based controller		Third party based controller	
	Main	Options	Main	Options	Main	Options
<b>1 PCI</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>2 PCI</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>3 PCIe x4</b>	Console display	F	Mura MPX-V16	E, D	Empty	
<b>4 PCIe x16</b>	C680	C	Mura MPX-4/4	A, B, D	Third party graphics hardware	
<b>5 PCIe x1</b>	Empty (Unusable)		Empty (Unusable)		Empty (Unusable)	
<b>6 PCIe x16</b>	MURAIPXI-D4JF	A, C	Mura MPX-4/4	B	MURAIPXI-D4JF	A
<b>Option</b>	<b>Product</b>					
<b>A</b>	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF					
<b>B</b>	Mura MPX-4/4, MPX-4/2, MPX-4/0, or MPX-SDI					
<b>C</b>	C900 or C680					
<b>D</b>	Mura MPX-V16 or MPX-V8					

Option	Product
<b>E</b>	Matrox P690 PCIe x16, Matrox P690 Plus LP PCIe x16, Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, or Matrox M9120 PCIe x16 (console options)
<b>F</b>	Matrox M9148 LP PCIe x16, Matrox M9140 LP PCIe x16, Matrox M9138 LP PCIe x16, Matrox M9128 LP PCIe x16, Matrox M9125 PCIe x16, Matrox M9120 Plus LP PCIe x16, Matrox M9120 Plus LP PCIe x1, Matrox M9120 PCIe x16, NVIDIA NVS 510, NVIDIA NVS 310, NVIDIA Quadro P400, Intel HD Graphics HD 630, or Intel HD Graphics 530 (console options)

## ASRock X79 Extreme 11

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	ASRock X79 Extreme 11
<b>PCIe expansion slots</b>	7 PCIe x16 3.0 slots (PCIE1/PCIE2/PCIE3/PCIE4/PCIE5/PCIE6/PCIE7: x16/0/16/0/16/0/16 mode or x16/8/8/8/8/8 mode)
<b>Chipset</b>	Intel® X79
<b>Processor</b>	Intel® Core™ i7 3939K, 3.2 GHz
<b>Heatsink (for CPU)</b>	LGA 2011 fan heatsink
<b>System memory</b>	8 GB DDR3
<b>System BIOS version</b>	1.4
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> <li><b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2 <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first Mura card in the slot labeled <b>PCIE1</b>.</li> <li>▪ Insert the second Mura card in the slot labeled <b>PCIE5</b>.</li> <li>▪ Insert the third Mura card in the slot labeled <b>PCIE3</b>.</li> <li>▪ Insert the fourth Mura card in the slot labeled <b>PCIE7</b>.</li> </ul>
<b>Performance considerations</b>	1-4 cards → ×16
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>

## ASUS® P6T7 WS

<b>Maximum number of cards supported</b>	7
<b>Motherboard</b>	ASUS® P6T7 WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ Slots 1, 3, and 5 – PCIe ×16 2.0 at ×16 or ×8 mode</li> <li>▪ Slot 7 – PCIe ×16 2.0 at ×16 mode</li> <li>▪ Slots 2, 4, and 6 – PCIe ×16 2.0 at ×8 mode</li> </ul>
<b>Chipset</b>	Intel® X58
<b>Processor</b>	Intel® Core™ i7-950, 3.06 GHz
<b>Heatsink (for CPU)</b>	LGA 1366 fan heatsink for Intel® Core™ i7 processor
<b>System memory</b>	6 GB DDR3
<b>System BIOS version</b>	0904 dated 09/24/2010
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP) <b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first four Mura cards in the blue slots labeled 1, 3, 5, and 7. Insert the next three Mura cards in slots 2, 4, or 6.</li> <li>▪ Installing more than four cards requires a new bracket and a 120 CFM fan for the front.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards (in blue connectors) → ×16</li> <li>▪ 5 cards → 3 ×16 + 2 ×8</li> <li>▪ 6 cards → 2 ×16 + 4 ×8</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ If you install a card in PCIe ×16 slot 7, the two front USB connectors won’t be functional due to mechanical conflicts. The six USB connectors in the back are functional.</li> </ul>

## ASUS® P6X58-E WS

<b>Maximum number of cards supported</b>	5
<b>Motherboard</b>	ASUS® P6X58-E WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 1 PCIe ×16 2.0 slot at ×16 mode</li> <li>▪ 2 PCIe ×16 2.0 slots at ×16 or ×8 mode</li> <li>▪ 2 PCIe ×16 2.0 slots at ×8 mode</li> <li>▪ 1 PCIe ×16 2.0 slot at ×1 mode</li> </ul>
<b>Chipset</b>	Intel® X58
<b>Processor</b>	Intel® Core™ i7-950 Quad, 3.07 GHz
<b>Heatsink (for CPU)</b>	LGA 1366 fan heatsink for the CPU
<b>System memory</b>	12 GB DDR3
<b>System BIOS version</b>	0301 dated 2/22/2011
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP) <b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “<a href="#">Approved fans for iStarUSA® D-400-2F80 chassis</a>”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first Mura card in the slot labeled <b>PCIe2.0×16_1</b>.</li> <li>▪ Insert the second and third Mura card in the slots labeled <b>PCIe2.0×16_3</b> and <b>PCIe2.0×16_5</b>.</li> <li>▪ Insert the fourth and fifth Mura cards in the slots labeled <b>PCIe2.0×16_2</b> and <b>PCIe2.0×16_4</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-3 cards → ×16</li> <li>▪ 4 cards → 2 ×16 + 2 ×8</li> <li>▪ 5 cards → 1 ×16 + 4 ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “<a href="#">Approved fans for iStarUSA® D-400-2F80 chassis</a>”, page 192.</li> </ul>

## ASUS® P8Z77 WS

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	ASUS® P8Z77 WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16/×8/×8, or quad ×8)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul>
<b>Chipset</b>	Intel® Z77 Express
<b>Processor</b>	Intel® Core™ i7-3770K, 3.5 GHz
<b>Heatsink (for CPU)</b>	LGA 1155 fan heatsink for the CPU
<b>System memory</b>	8 GB DDR3
<b>System BIOS version</b>	0502 x64
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> </ul> <b>OR</b> <ul style="list-style-type: none"> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIe 3.0/2.0 ×16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIe 3.0/2.0 ×16_1</b> and <b>PCIe 3.0/2.0 ×16_3</b>.</li> <li>▪ If you’re installing up to four cards, insert the third and fourth Mura cards in the slots labeled <b>PCIe 3.0/2.0 ×16_2</b> and <b>PCIe 2.0 ×16_4</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For two-card configurations, a longer ribbon cable (for framlock) is required (P/N: F16279-00). For more information, contact your Matrox representative.</li> </ul>

## ASUS® P9X79 Pro

<b>Maximum number of cards supported</b>	3
<b>Motherboard</b>	ASUS® P9X79 Pro
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 3 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8)</li> <li>▪ 1 PCIe ×16 3.0/2.0 slot at ×8 mode</li> <li>▪ 2 PCIe ×16 3.0/2.0 slots at ×1 mode</li> </ul>
<b>Chipset</b>	Intel® X79
<b>Processor</b>	Intel® Core™ i7-3930K, 3.2 GHz
<b>Heatsink (for CPU)</b>	LGA 2011 fan heatsink for the CPU
<b>System memory</b>	16 GB DDR3
<b>System BIOS version</b>	1104 X64 dated 04/10/2012
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> </ul> <p style="text-align: center;"><b>OR</b></p> <ul style="list-style-type: none"> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2 <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIe16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIe16_1</b> and <b>PCIe16_4</b>.</li> <li>▪ If you’re installing three cards, insert the Mura cards in the slots labeled <b>PCIe16_1</b>, <b>PCIe16_2</b>, and <b>PCIe16_4</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For two-card configurations, a longer ribbon cable (for framelock) is required (P/N: F16279-00). For more information, contact your Matrox representative.</li> </ul>

## ASUS® P9X79-E WS

<b>Maximum number of cards supported</b>	6
<b>Motherboard</b>	ASUS® P9X79-E WS
<b>Available PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0 slots at ×16 mode (blue)</li> <li>▪ 3 PCIe ×16 3.0 slot at ×8 mode (black)</li> </ul>
<b>Chipset</b>	Intel® X79
<b>Processor</b>	Intel® Core™ i7-3820, 3.6 GHz
<b>Heatsink (for CPU)</b>	LGA 2011 fan heatsink for the CPU
<b>System memory</b>	4 GB DDR3
<b>System BIOS version</b>	1103 X64
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> </ul> <b>OR</b> </li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> </ul> </li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_5</b>.</li> <li>▪ If you’re installing three cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b>, <b>PCIEX16_3</b>, and <b>PCIEX16_5</b>.</li> <li>▪ If you’re installing four cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b>, <b>PCIEX16_3</b>, <b>PCIEX16_5</b>, and <b>PCIEX16_7</b>.</li> <li>▪ If you’re installing up to 6 cards, insert the remaining two cards in the slots labeled <b>PCIEX16_2</b> and <b>PCIEX16_6</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 5 cards → 2 ×16 + 3 ×8</li> <li>▪ 6 cards → 2 ×16 + 4 ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Using the onboard USB controller may result in erratic USB behavior if the slot labeled <b>PCIEX16_4</b> is populated.</li> </ul>

## ASUS® P9X79 WS

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	ASUS® P9X79 WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8, black and blue)</li> <li>▪ 2 PCIe ×16 3.0/2.0 slots at ×4 mode (white)</li> </ul>
<b>Chipset</b>	Intel® X79
<b>Processor</b>	Intel® Core™ i7-3930K, 3.2 GHz
<b>Heatsink (for CPU)</b>	LGA 2011 fan heatsink for the CPU
<b>System memory</b>	8 GB DDR3
<b>System BIOS version</b>	0603 X64 dated 11/11/2011
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> <li><b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2 <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIe2.0×16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIe2.0×16_1</b> and <b>PCIe2.0×16_4</b>.</li> <li>▪ If you’re installing up to four cards, insert the third and fourth Mura cards in the slots labeled <b>PCIe2.0×16_2</b> and <b>PCIe2.0×16_6</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For two-card configurations, a longer ribbon cable (for framlock) is required (P/N: F16279-00). For more information, contact your Matrox representative.</li> </ul>

## ASUS® X99-A

<b>Maximum number of cards supported</b>	3
<b>Motherboard</b>	ASUS® X99-A
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 40 lane CPU –           <ul style="list-style-type: none"> <li>▪ 3 PCIe ×16 3.0/2.0 slots (one ×16, two ×16/x16, three ×16/x16/x8)</li> <li>▪ 1 PCIe ×16 2.0 slot (maximum ×4 mode)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul> </li> <li>▪ 28 lane CPU –           <ul style="list-style-type: none"> <li>▪ 3 PCIe ×16 3.0/2.0 slots (one ×16, two ×16/x8, three ×16/x8/x4)</li> <li>▪ 1 PCIe ×16 2.0 slot (maximum ×4 mode)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul> </li> </ul>
<b>Chipset</b>	Intel® X99
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ Intel® Core™ i7-5820K, 3.3 GHz (28 lane CPU)</li> <li>▪ Intel® Core™ i7-5930K, 3.3 GHz (40 lane CPU)</li> </ul>
<b>Heatsink (for CPU)</b>	LGA 2011-V3
<b>System memory</b>	8 GB DDR4, 2133 MHz
<b>System BIOS version</b>	1601
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP) <b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ 40 lane CPU –           <ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_3</b>.</li> <li>▪ If you’re installing three cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b>, <b>PCIEX16_3</b>, and <b>PCIEX16_4</b>.</li> </ul> </li> <li>▪ 28 lane CPU –           <ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_3</b>.</li> </ul> </li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 40 lane CPU –           <ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 2 ×16 + 1 ×8</li> </ul> </li> <li>▪ 28 lane CPU –           <ul style="list-style-type: none"> <li>▪ 1 card → ×16</li> <li>▪ 2 cards → 1 ×16 + 1 ×8</li> </ul> </li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For more information on supported chassis, see “Validated chassis”, page 179.</li> </ul>

## ASUS® X99-DELUXE

<b>Maximum number of cards supported</b>	5
<b>Motherboard</b>	ASUS® X99-DELUXE
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 40 lane CPU –           <ul style="list-style-type: none"> <li>▪ 5 PCIe ×16 3.0/2.0 slots (one ×16, two ×16/×16, three ×16/×16/×8, four ×8/×8/×16/×8, five ×8/×8/×8/×8/×8)</li> <li>▪ 1 PCIe ×16 2.0 slot (maximum ×4 mode)</li> </ul> </li> <li>▪ 28 lane CPU –           <ul style="list-style-type: none"> <li>▪ 3 PCIe ×16 3.0/2.0 slots (one ×16, two ×16/×8, three ×8/×8/×8)</li> <li>▪ 1 PCIe ×16 2.0 slot (maximum ×4 mode)</li> <li>▪ 2 PCIe ×1 2.0 slots (×1 mode)</li> </ul> </li> </ul>
<b>Chipset</b>	Intel® X99
<b>Processor</b>	<ul style="list-style-type: none"> <li>▪ Intel® Core™ i7-5820K, 3.3 GHz (28 lane CPU)</li> <li>▪ Intel® Core™ i7-5930K, 3.3 GHz (40 lane CPU)</li> </ul>
<b>Heatsink (for CPU)</b>	LGA 2011-V3
<b>System memory</b>	8 GB DDR4, 2133 MHz
<b>System BIOS version</b>	1601
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)               <p style="text-align: center;"><b>OR</b></p> </li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ 40 lane CPU –           <ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_3</b>.</li> <li>▪ If you’re installing three cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b>, <b>PCIEX16_3</b>, and <b>PCIEX16_5</b>.</li> <li>▪ If you’re installing more than three cards, insert the remaining Mura cards in the slots labeled <b>PCIEX16_2</b> and <b>PCIEX16_4</b>.</li> </ul> </li> <li>▪ 28 lane CPU –           <ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_4</b>.</li> <li>▪ If you’re installing three cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b>, <b>PCIEX16_2</b>, and <b>PCIEX16_4</b>.</li> </ul> </li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 40 lane CPU –           <ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 2 ×16 + 1 ×8</li> <li>▪ 4 cards → 1 ×16 + 3 ×8</li> <li>▪ 5 cards → 5 ×8</li> </ul> </li> <li>▪ 28 lane CPU –           <ul style="list-style-type: none"> <li>▪ 1 card → ×16</li> <li>▪ 2 cards → 1 ×16 + 1 ×8</li> <li>▪ 3 cards → 3 ×8</li> </ul> </li> </ul>

<b>Notes</b>	<ul style="list-style-type: none"><li>▪ If you're using the 40 lane CPU, you need to change the default BIOS settings. Under <b>Advance Mode</b>, select <b>Tool</b>, then set the bandwidth of the <b>PCIEX16_5 slot</b> (black) to <b>x8 Modex-AMI</b>. This enables the slot to run in <math>\times 8</math> mode.</li><li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li><li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “<a href="#">Approved fans for iStarUSA® D-400-2F80 chassis</a>”, page 192.</li><li>▪ For more information on supported chassis, see “<a href="#">Validated chassis</a>”, page 179.</li></ul>
--------------	---

## ASUS® X99-E WS

<b>Maximum number of cards supported</b>	7
<b>Motherboard</b>	ASUS® X99-E WS
<b>PCIe expansion slots</b>	7 PCIe ×16 3.0/2.0 slots
<b>Chipset</b>	Intel® X99
<b>Processor</b>	Intel® Core™ i7-5930K, 3.5 GHz
<b>System memory</b>	32 GB DDR4
<b>System BIOS version</b>	0902
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> <li style="text-align: center;"><b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_3</b>.</li> <li>▪ If you’re installing up to four cards, insert the Mura cards in the slots labeled <b>PCIEX16_5</b> and <b>PCIEX16_7</b>.</li> <li>▪ If you’re installing more than four cards, use the remaining slots.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-4 cards → ×16</li> <li>▪ 7 cards → 1 ×16 + 6 ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For more information on supported chassis, see “Validated chassis”, page 179.</li> </ul>

## ASUS® Z87 WS

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	ASUS® Z87 WS
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 4 PCIe ×16 3.0/2.0 slots (dual ×16 or ×16, ×8, ×8, or quad ×8)</li> <li>▪ 2 PCIe ×1 2.0 slots</li> </ul>
<b>Chipset</b>	Intel® Z87
<b>Processor</b>	Intel® Core™ i7-477K, 3.5 GHz
<b>Heatsink (for CPU)</b>	LGA 1150 fan heatsink for the CPU
<b>System memory</b>	4 GB DDR3
<b>System BIOS version</b>	0904 X64
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> </ul> <p style="text-align: center;"><b>OR</b></p> <ul style="list-style-type: none"> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_3</b>.</li> <li>▪ If you’re installing three cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b>, <b>PCIEX16_2</b>, and <b>PCIEX16_3</b>.</li> <li>▪ If you’re installing up to four cards, insert the fourth Mura card in the slot labeled <b>PCIEX16_4</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For two-card configurations, a longer ribbon cable (for framelock) is required (P/N: F16279-00). For more information, contact your Matrox representative.</li> </ul>

## GIGABYTE™ G1 Sniper3

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	Gigabyte G1 Sniper3
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots at ×16 mode</li> <li>▪ 2 PCIe ×16 3.0 slots at ×8 mode</li> <li>▪ 2 PCIe ×16 2.0 slots at ×1 mode</li> </ul>
<b>Chipset</b>	Intel® Z77 Express
<b>Processor</b>	Intel® Core™ i7-3770, 3.4 GHz
<b>Heatsink (for CPU)</b>	LGA 1155 fan heatsink for the CPU
<b>System memory</b>	8 GB DDR3
<b>System BIOS version</b>	AMI version F5
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> </ul> <b>OR</b> <ul style="list-style-type: none"> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing one card, insert the Mura card in the slot labeled <b>PCIEX16_1</b>.</li> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_2</b>.</li> <li>▪ If you’re installing up to four cards, insert the third and fourth Mura cards in the slots labeled <b>PCIEX8_1</b> and <b>PCIEX8_2</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 1 ×16 + 2 ×8</li> <li>▪ 4 cards → ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ For multi-card configurations, longer ribbon cables (for framelock) are required (P/N: F16279-00). For more information, contact your Matrox representative.</li> </ul>

## GIGABYTE™ GA-X79-UD3

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	Gigabyte GA-X79-UD3
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 2 PCIe ×16 3.0 slots at ×16 mode</li> <li>▪ 2 PCIe ×16 3.0 slots at ×8 mode</li> <li>▪ 2 PCIe ×16 2.0 slots at ×1 mode</li> </ul>
<b>Chipset</b>	Intel® X79 Express
<b>Processor</b>	Intel® Core™ i7-3820, 3.7 GHz
<b>Heatsink (for CPU)</b>	LGA 2011 fan heatsink for the CPU
<b>System memory</b>	16 GB DDR3
<b>System BIOS version</b>	AMI version F10 (build date: 03/05/2012)
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP)</li> </ul> <p style="text-align: center;"><b>OR</b></p> <ul style="list-style-type: none"> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul> </li> <li>▪ Advantech – Use the 700W power supply included with the chassis.</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA –           <ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul> </li> <li>▪ Advantech – Use the standard bracket included with the chassis.</li> </ul>
<b>Fan</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – 120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> <li>▪ Advantech – Included with chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 + Kit 2           <ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul> </li> <li>▪ Advantech (P/N: C-MAT1A-ACP4010-01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ If you’re installing two cards, insert the Mura cards in the slots labeled <b>PCIEX16_1</b> and <b>PCIEX16_2</b>.</li> <li>▪ If you’re installing up to four cards, insert the third and fourth Mura cards in the slots labeled <b>PCIEX8_1</b> and <b>PCIEX8_2</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → ×16</li> <li>▪ 3 cards → 2 ×16 + 1×8</li> <li>▪ 4 cards → ×8</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>

## MSI® Big Bang-XPower

<b>Maximum number of cards supported</b>	4
<b>Motherboard</b>	MSI Big Bang-XPower (MS-7666)
<b>PCIe expansion slots</b>	<ul style="list-style-type: none"> <li>▪ 6 PCIe x16 2.0 slots:           <ul style="list-style-type: none"> <li>▪ PCI_E2 and PCI_E5 support up to PCIe x16 speeds</li> <li>▪ PCI_E4 and PCI_E6 support up to PCIe x8 speeds</li> <li>▪ PCI_E3 and PCI_E7 support up to PCIe x4 speeds</li> </ul> </li> <li>▪ 1 PCIe x1 1.1 slot</li> </ul>
<b>Chipset</b>	Intel® X58
<b>Processor</b>	Intel® Core™ i7-950 processor, 3.06 GHz
<b>Heatsink (for CPU)</b>	LGA 1366 Heatsink Cooling Fan for Intel® Core™ i7 processor
<b>System memory</b>	6 GB DDR3
<b>System BIOS version</b>	V1.2
<b>Power supply</b>	<ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (Part# IS-800R3NP) <b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (Part# TC-750PD1)</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul>
<b>Chassis</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2x 80mm fans (Part# D-400-2F80) <b>AND</b></li> <li>▪ iStarUSA Kit 2 – Custom fan bracket + 120cfm fan (front fan assembly) (Part# DD-FANGUARD-12-MAT01)</li> </ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"> <li>▪ Insert the first two Mura cards in the slots labeled <b>PCI_E2</b> and <b>PCI_E5</b>.</li> <li>▪ Insert the third Mura card in the slots labeled <b>PCI_E4</b> or <b>PCI_E6</b>.</li> </ul>
<b>Performance considerations</b>	<ul style="list-style-type: none"> <li>▪ 1-2 cards → x16</li> <li>▪ 3 cards → x16 + 2 x8</li> <li>▪ 4 cards → x4 x8</li> </ul>

# Validated PCIe expansion boxes

The following PCIe expansion boxes have been validated by Matrox to work with Matrox Mura MPX Series, Mura IPX Series, C900, and C680 products.



**Note:** For improved performance, we recommend you avoid using PCIe® ×4 slots or lower.

## Currently supported PCIe expansion box

### Magma ExpressBox 3T

<b>Maximum number of cards supported</b>	2
<b>Part number</b>	EB3T
<b>Power supply</b>	250W
<b>Available PCIe expansion slots</b>	<ul style="list-style-type: none"><li>▪ 1 PCIe x16 2.0 slot (x16 mechanical and x8 electrical)</li><li>▪ 1 PCIe x8 2.0 slot (x8 mechanical and electrical)</li><li>▪ 1 PCIe x8 2.0 slot (x8 mechanical and x4 electrical)</li></ul>
<b>Expansion slot configuration</b>	<ul style="list-style-type: none"><li>▪ Insert the Mura MPX-4/4 or C-Series card in the slot labeled <b>SLOT3</b> (PCIe x8).</li><li>▪ Insert the Mura IPX Series capture card in the slot labeled <b>SLOT2</b> (PCIe x8/4).</li></ul>
<b>Notes</b>	<ul style="list-style-type: none"><li>▪ The ExpressBox fanspeed must be set to the maximum. For more information, see the “Fan Speed” section of the ExpressBox 3T manual to set the fan jumper setting to F.</li><li>▪ Use the Thunderbolt™ 2.0 port on the Express Box for 20 Gbps high speed Thunderbolt connection to the host system.</li><li>▪ Requires the host system to power up the Magma ExpressBox 3T.</li></ul>

# Validated chassis

The following chassis have been validated by Matrox to work with Matrox Mura MPX Series, Mura IPX Series, C900, and C680 products.



**Note:** For improved performance, we recommend you avoid using PCIe® ×4 slots or lower.



**Note:** If graphics hardware is built into the motherboard of your system, you need to disable it in Windows® Device Manager on Mura MPX Series based video wall systems. For more information, see your system manual or Windows help.

## Currently supported chassis

### Advantech ACP-4000MB-00XE

Cards supported (maximum)	3
Part number	ACP-4000MB-00XE (Includes chassis, 500W power supply, and fans.)
Power supply	500W (included, see part number) Optional Power Supply: 700 W (Advantech Model FSP700-80PSA)
Power supply bracket	Standard
Supported motherboards	<ul style="list-style-type: none"><li>▪ Advantech ASMB-815</li><li>▪ Advantech ASMB-820</li></ul>

### Advantech HPC-7400

Cards supported (maximum)	6
Part number	HPC-7400MB-14A1E (includes chassis, power supply and fans)
Power supply	1400W 80 plus Redundant power supply
Power supply bracket	Standard
Supported motherboards	<ul style="list-style-type: none"><li>▪ Advantech ASMB-813</li></ul>

### Advantech IPC-623

Cards supported (maximum)	17
Part number	IPC-623BP-00XBE (for single power supply; includes chassis and fans; power supply not included)
Power supply	850W / 1200W Single Power Supply <ul style="list-style-type: none"><li>▪ Enermax 1200W (Part#: EPF1200EW)</li><li>▪ EVGA 850W (Part#: 220-G3-0850-X1)</li></ul>
Power supply bracket	Standard
Supported motherboards	<ul style="list-style-type: none"><li>▪ PCE-5B19 (BP)/PCE-5128 (SHB)</li><li>▪ PCE-5B12 (BP)/PCE-7127 (SHB)</li><li>▪ PCE-5B12 (BP)/PCE-5129 (SHB)</li><li>▪ PCE-5B12 (BP)/PCE-7129 (SHB)</li><li>▪ PCE-5B19 (BP)/PCE-5129 (SHB)</li><li>▪ PCE-5B19 (BP)/PCE-7129 (SHB)</li><li>▪ PCE-7B17 (BP)/PCE-7127 (SHB)</li></ul>

## Chenbro RM41300-FS81

<b>Cards supported (maximum)</b>	7
<b>Part number</b>	RM41300-FS81 (Includes chassis and fans. Power supply not included.)
<b>Power supply</b>	750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8, or 850W (P/N: EVGA Supernova 850G3)
<b>Power supply bracket</b>	Standard
<b>Supported motherboards</b>	<ul style="list-style-type: none"> <li>▪ ASUS® P6T7 WS</li> <li>▪ ASUS® P9X79 Pro</li> <li>▪ ASUS® P9X79 WS</li> <li>▪ ASUS® P9X79-E WS</li> <li>▪ ASUS® P8Z77 WS</li> <li>▪ ASUS® P6X58-E WS</li> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS C422 SAGE/10G</li> <li>▪ ASUS® WS C621E SAGE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® WS Z390 PRO</li> <li>▪ ASUS® X99-A</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-DELUXE</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS/USB3.1</li> <li>▪ ASUS® Z270-WS</li> <li>▪ ASUS® Z87 WS</li> <li>▪ GIGABYTE™ MW51-HP0</li> <li>▪ MSI X299 SLI PLUS</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> <li>▪ SUPERMICRO® H11SSL-i</li> </ul>

## iStarUSA® D-400-2F80

<b>Cards supported (maximum)</b>	7
<b>Part number</b> (to be ordered from iStarUSA)	<ul style="list-style-type: none"> <li>▪ iStarUSA Kit 1 – 400 chassis with black doors and 2× 80mm fans (P/N: D-400-2F80)</li> <li>▪ iStarUSA Kit 2 – Custom fan bracket (P/N: DD-FANGUARD-12-MAT01). For more information on how to properly install the fan bracket, contact Matrox Technical Support.</li> </ul>
<b>Power supply</b> (to be ordered from iStarUSA)	<ul style="list-style-type: none"> <li>▪ 800W iStarUSA redundant power supply with mounting bracket for D-400 (P/N: IS-800R3NP) <b>OR</b></li> <li>▪ 750W iStarUSA single regular power supply (P/N: TC-750PD1 or TC-750PD8)</li> </ul>
<b>Power supply bracket</b>	<ul style="list-style-type: none"> <li>▪ Redundant power supply – Use the bracket included with the power supply.</li> <li>▪ Regular power supply – Use the standard bracket included with the chassis.</li> </ul>

<b>Fan</b>	120 CFM fan (front fan assembly). Fan to be ordered separately from the list of approved vendors. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.
<b>Supported motherboards</b>	<ul style="list-style-type: none"> <li>▪ ASRock X79 Extreme 11</li> <li>▪ ASUS® P6T7 WS</li> <li>▪ ASUS® P6X58-E WS</li> <li>▪ ASUS® P8Z77 WS</li> <li>▪ ASUS® P9X79 Pro</li> <li>▪ ASUS® P9X79-E WS</li> <li>▪ ASUS® P9X79 WS</li> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS C422 SAGE/10G</li> <li>▪ ASUS® WS C621E SAGE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® WS Z390 PRO</li> <li>▪ ASUS® X99-A</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-Deluxe</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS/USB3.1</li> <li>▪ ASUS® Z270-WS</li> <li>▪ ASUS® Z87 WS</li> <li>▪ GIGABYTE™ G1.Sniper3</li> <li>▪ GIGABYTE™ GA-X79-UD3</li> <li>▪ GIGABYTE™ MW51-HP0</li> <li>▪ MSI X299 SLI PLUS</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> <li>▪ SUPERMICRO® H11SSL-i</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ iStarUSA – The chassis and power supply must be ordered from iStarUSA.</li> <li>▪ The fan must be ordered from a separate fan vendor. For more information on approved fans and fan vendors, see “Approved fans for iStarUSA® D-400-2F80 chassis”, page 192.</li> </ul>

## iStarUSA D-400L-7

<b>Maximum number of cards supported</b>	7
<b>Part number</b>	iStarUSA D-400L-7
<b>Power supply</b>	860W single regular power supply (iStar USA Part Number: TC-860PD8; not included with the chassis)
<b>Power supply bracket</b>	Standard bracket included with the chassis
<b>Fan</b>	Included with the chassis
<b>Supported motherboards</b>	<ul style="list-style-type: none"> <li>▪ ASUS® Z270-WS</li> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® WS C422 SAGE/10G</li> <li>▪ ASUS® WS C621E SAGE</li> <li>▪ ASUS® WS Z390 PRO</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS/USB3.1</li> <li>▪ GIGABYTE™ MW51-HP0</li> <li>▪ MSI X299 SLI PLUS</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> <li>▪ SUPERMICRO® H11SSL-i</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ The center fan at the rear of the chassis must be disconnected.</li> <li>▪ In the System BIOS, select Advanced → Hardware Monitor → CPU Fan Speed Control, then set all the System fan speed controls to Full speed.</li> </ul>

## NORCO RPC-432

<b>Cards supported (maximum)</b>	4
<b>Part number</b>	RPC-432 (includes chassis, 2x120mm front fans)
<b>Power supply</b>	550W (Part# Corsair CS550M); not included with the chassis
<b>Power supply bracket</b>	Standard
<b>Supported motherboards</b>	<ul style="list-style-type: none"> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS Z390 Pro</li> <li>▪ SUPERMICRO® C9Z390-PGW</li> </ul>
<b>Notes</b>	<ul style="list-style-type: none"> <li>▪ Optional 2x 80mm rear fans should be ordered separately</li> <li>▪ The chassis fans must be set to full speed</li> </ul>

## Portwell 10 slot chassis

<b>Cards supported (maximum)</b>	10
<b>Part number</b>	21-M90104-0012 (includes chassis and fans. Power supply must be ordered separately.)
<b>Power supply</b>	950W redundant power supply ( Portwell Part# 02-527050-0002)
<b>Power supply bracket</b>	Standard
<b>Supported motherboards</b>	<ul style="list-style-type: none"> <li>▪ PBPE-11A-MT (BP) / ROBO-8110A (SHB)</li> <li>▪ PBPE-11A-MT (BP) / ROBO-8113VG2AR (SHB)</li> <li>▪ PBPE-11A-MT (BP) / ROBO-8113VG2AR-Q170-KBL (SHB)</li> </ul>

## Rackmaster 20 slot chassis

<b>Cards supported (maximum)</b>	17
<b>Part number</b>	<ul style="list-style-type: none"> <li>▪ 010-0163 (includes chassis, fans and 800W redundant power supply)</li> <li>▪ 010-0164 (includes chassis, fans, 800W redundant power supply and Motherboard from the supported list)</li> <li>▪ 010-0165 (includes chassis, fans and 1200W single power supply)</li> <li>▪ 010-0166 (includes chassis, fans, 1200W single power supply and Motherboard from the supported list)</li> </ul>
<b>Power supply</b>	800W redundant power supply /1200W single power supply included with the chassis
<b>Power supply bracket</b>	Standard
<b>Fan</b>	3x 150cfm fans included with the chassis.
<b>Supported motherboards</b>	<ul style="list-style-type: none"> <li>▪ Advantech PCE-5B19 (BP)/PCE-5128 (SHB)</li> <li>▪ Advantech PCE-5B19 (BP)/PCE-5129 (SHB)</li> <li>▪ Advantech PCE-5B19 (BP)/PCE-7129 (SHB)</li> <li>▪ Advantech PCE-5B12 (BP)/PCE-7127 (SHB)</li> <li>▪ Advantech PCE-5B12 (BP)/PCE-5129 (SHB)</li> <li>▪ Advantech PCE-5B12 (BP)/PCE-7129 (SHB)</li> </ul>

## SUPERMICRO® SuperChassis 842XTQ-R606B

Cards supported (maximum)	7
Part number	CSE-842XTQ-R606B (Includes chassis, 600W redundant power supply, and fans.)
Power supply	600W redundant, model PWS-606P-1R
Power supply bracket	Standard
Supported motherboards	<ul style="list-style-type: none"> <li>▪ ASUS® P6T7 WS</li> <li>▪ ASUS® P6X58-E WS</li> <li>▪ ASUS® P8Z77 WS</li> <li>▪ ASUS® P9X79 Pro</li> <li>▪ ASUS® P9X79-E WS</li> <li>▪ ASUS® P9X79 WS</li> <li>▪ ASUS® WS C422 PRO/SE</li> <li>▪ ASUS® WS X299 Sage</li> <li>▪ ASUS® X99-A</li> <li>▪ ASUS® X99-A II</li> <li>▪ ASUS® X99-DELUXE</li> <li>▪ ASUS® X99-DELUXE II</li> <li>▪ ASUS® X99-E WS</li> <li>▪ ASUS® X99-E WS / ASUS® X99-E WS/USB 3.1</li> <li>▪ ASUS® Z87 WS</li> </ul>

---

## EOL (End of Life) chassis

### Advantech C-MAT1A-ACP4010-01

Cards supported (maximum)	7
Part number	C-MAT1A-ACP4010-01 (Includes chassis, 700W power supply, and fans.)
Power supply	700W (included, see part number)
Power supply bracket	Standard
Supported motherboards	<ul style="list-style-type: none"> <li>▪ ASRock X79 Extreme 11</li> <li>▪ ASUS® P6T7 WS</li> <li>▪ ASUS P6X58-E WS</li> <li>▪ ASUS P8Z77 WS</li> <li>▪ ASUS P9X79 Pro</li> <li>▪ ASUS P9X79 WS</li> <li>▪ Gigabyte G1.Sniper3</li> <li>▪ Gigabyte GA-X79-UD3</li> </ul>

### Advantech IPC-7130-00XE

Cards supported (maximum)	2
Part number	IPC-7130-00XE
Power supply	PS-400ATX-ZE (400W 80 PLUS PS/2 PSU)
Power supply bracket	Standard
Supported motherboards	Advantech ASMB-781G4-00A1E

## **Delo Step Multi-View**

<b>Cards supported (maximum)</b>	4
<b>Part number</b>	1039268 (Includes chassis, 560W power supply, and fans.)
<b>Power supply</b>	Seasonic X-Series (560W), model SS-560KM
<b>Power supply bracket</b>	Standard
<b>Supported motherboards</b>	<ul style="list-style-type: none"><li>▪ ASUS® P9X79 WS</li><li>▪ ASUS® P8Z77 WS</li></ul>

## **Nijkerk NCS-R416A-MB-NOIR**

<b>Cards supported (maximum)</b>	7
<b>Part number</b>	NCS-R416A-MB-NOIR
<b>Power supply</b>	Antec HCP-750 (750W)
<b>Power supply bracket</b>	Standard
<b>Supported motherboards</b>	ASUS® P6T7 WS

## **SUPERMICRO® SuperChassis 836**

<b>Cards supported (maximum)</b>	3
<b>Part number</b>	CSE-836 (Includes chassis, 800W redundant power supply, and fans.)
<b>Power supply</b>	ABLECOM (800W redundant), model PWS-801-1R
<b>Power supply bracket</b>	Standard
<b>Supported motherboards</b>	ASUS® P9X79 Pro

# System ventilation

Without proper system ventilation, the motherboard and add-in cards will operate at elevated temperatures. Continued operation at elevated temperatures will reduce the life expectancy of the overall system. Mechanical components (such as fans), in particular, experience higher failure rates when exposed to elevated temperatures over long periods of time. The system integrator must verify that the system – and the add-in card area in particular – is properly ventilated. The result is a system that runs cooler, has a longer operating life, and offers higher reliability.



**Note:** To guarantee the longevity of your system and the installed cards, make sure your system is installed in a properly ventilated location. Running Matrox Mura and C-Series cards above the specified temperatures will lead to permanent damage to the card that won't be covered by the Matrox warranty.

**Mura MPX Series** – The Mura MPX Series operating temperature is 0 to 40 °C. When the Mura MPX card is installed in a properly ventilated system, the temperature of the Mura MPX card recorded by Matrox PowerDesk software **must never exceed 100 °C**.

To monitor and record the temperature changes of your graphics hardware, use Matrox PowerDesk software. From the main interface, click **Help and Troubleshooting** → **Troubleshoot**. Under **Chip temperature data and logging**, you can enable the options to monitor the peak temperatures or log the chip temperatures of your graphics hardware. Systems validated by Matrox have guaranteed thermal and ventilation characteristics.

**Mura IPX Series** – The Mura IPX Series operating temperature is 0 to 45 °C. When a Mura IPX Series card is installed in a properly ventilated system, the temperature of the Mura IPX Series card recorded by the Matrox IPX Utility tool or APIs **must never exceed 100 °C**.

To monitor and record the temperature changes of your Mura IPX Series card, use **Matrox IPX utility tool**. From the Mura CD package, install *Network API SDK.msi*. Then, go to system's *Program Files (x86)\Matrox Graphics Inc\Matrox Network API SDK\Applications* and run the *IPX utility.exe*. From the IPX utility tool window, enter **localhost** to get the temperature of your Mura IPX Series card.

**C900/C680** – The temperature of your C900 and C680 cards should never exceed 90 °C. To retrieve the temperature of your C-Series card, use Matrox PowerDesk software. From the main interface, click **Help and Troubleshooting** → **Troubleshoot**. Under **Chip temperature data and logging**, you can enable options to monitor the peak temperatures and log the chip temperatures of your C-Series card.

**Third party graphics hardware** – Ensure that your third party graphics hardware remains within the maximum allowed temperature. For more information on how to monitor and record the temperature or for temperature requirements of your third party graphics hardware, see your third party graphics hardware documentation.

For more information on ensuring proper system ventilation, see the Matrox Chassis Selection Guide.

# Power supply sizing for Matrox Mura MPX Series based, C-Series based, and Third party based systems

When assembling a system based on Mura MPX Series or C-Series products, the power supply must be sized to provide power for the entire system, including the CPU, all add-in cards, and any peripherals connected. To determine the power supply size, you must consider not only the power requirements of all devices but also the power rails from which the current is being drawn.

Each power supply provides different voltages with varying current load capacities, depending on system usage. For example, a -12V supply (still used in some systems) supports less than 1A of load, whereas a +12V supply, which bears the brunt of the load in modern systems, can easily exceed 50A capacity in many mid-sized power supplies. The remaining voltages (typically, +3.3V, +5V, and +5VSB) fall between these extremes in terms of current load capacity.

Matrox cards, being PCI Express based, draw power primarily from the +12V supply. Although a small amount of power (approximately 0.1A) is drawn from the +3.3V supply, the power supply must have sufficient capacity on the +12V supply rail. Since each Matrox SKU has slightly different power supply requirements, using the largest possible current requirement to size the power supply will ensure the power supply is adequate, regardless of the SKUs installed.

To properly size the power supply, the power requirements of all the devices must be added together separately for each supply rail and then the appropriate power supply selected. For example, the Mura MPX-4/4 SKU (4 outputs, 4 inputs) consumes approximately 3.5A from the +12V supply. Seven Mura MPX-4/4 cards would therefore consume approximately 24.5A (or  $7 \times 3.5\text{A}$ ) from this supply. This +12V current requirement is in addition to any pre-existing requirements of the motherboard and/or system (for example, CPU, motherboard, hard disk drives, etc.). In other words, if the base system requires 15A from the +12V supply with no Mura cards installed, once the Mura cards are installed the power supply must provide  $15\text{A} + 24.5\text{A}$  (or 39.5A) on the +12V rail for adequate power supply.

A merely “adequate” power supply, however, isn’t sufficient. Most power supplies operate at optimal efficiency at 50-60% of their rated power load. Continually operating beyond this may cause excessive thermal generation and lead to premature aging of the electronic components. It’s common practice to ensure that the power supply can supply additional current beyond what’s required for the system configuration in typical use. For maximum efficiency and reliability, make sure to provide a minimum 50% margin on the power supply rating. In the example above, a system requiring 39.5A on the +12V rail would require approximately 475W. Assuming another 50W for the +3.3V rail and 10W for the +5V rail, the total system requirements are approximately 475W + 50W + 10W, for a total of 535W. A 50% margin on the power supply means specifying a supply of 800W that can supply at least 60A on the +12V supply.

By providing less margin than specified above, the power supply will be used under higher load conditions, which may lead to excess heat generation within the power supply and premature wear-out of electronic components. Insufficient margin may also compromise the overall reliability of the product.



**Note:** The margin provided on the power supply must never be less than 35-40%.

For a common display wall setup that supports up to seven Matrox cards and uses a mid-range Intel CPU, we recommend a minimum power supply of 800W. For larger systems, the power supply must be increased accordingly, taking into account the requirements of the CPU or SHB and backplane/motherboard components.

For third party graphics hardware, an optional power supply may be required for maximum support. If your power supply has an insufficient number of 6-pin connectors to support the maximum number of third party graphics hardware, you can order optional power cables. For more information on the power requirements of systems based on third party graphics hardware, see the documentation for your third party graphics hardware.

## Shipping an integrated system

While shipping an integrated system, make sure that add-in cards are properly installed in the expansion slots and the board bracket is screwed securely to the chassis. Most systems have a board retaining clip to protect cards from shock and vibration. If your system has a board retaining clip, use the board retaining clip to securely clamp the boards into place. For more information, see the user guide for your system or chassis. Follow the system/chassis manufacturer’s guidelines for proper installation, shipment, and transportation of an integrated system. Failure to do so may cause damage to the cards due to shock and vibration during shipping and transportation.

# PCI Express® bandwidth considerations in Matrox Mura MPX Series based or C-Series based systems

System architecture is important in determining overall capture and display performance with Mura MPX Series based and C-Series based systems. Although the input resolutions and formats must be considered, the system bus-level architecture also plays an important role in optimizing the system for the best possible performance. This section will outline some of the issues to consider when implementing Mura MPX Series based and C-Series based display walls.

## Input source bandwidth requirements

Any capture architecture receives its data from external sources and transfers it to one or more graphics engines for display. The inputs may take many forms: IP, HDMI, DVI, analog RGB, component video, or even standard TV inputs using either composite or Y/C signals. Each of these inputs places a different load on the system in terms of quantity of data to be transferred.

The bandwidth required to transfer a captured stream within a computer system is dependent on input resolution, format and frame buffer organization. The input format refers to both pixel depth (8- or 10-bits) and pixel format (4:4:4, 4:2:2 or 4:2:0), and frame buffer organization is typically linear or planar. Although a frame buffer may be 24 bits, system transfers are performed in 8-, 16-, or 32-bit “chunks”. The formula below provides an approximation of the bandwidth required from a given input stream, and assumes planar frame buffer organization.

In some cases, it may be possible to capture sources and transfer them internally using a 16-bit YUV format. Doing so will reduce the amount of system bandwidth required to transfer the input data, but it will also degrade the capture quality (since less data is being used to represent each pixel). This option should be used only when necessary, and with sources, where the quality of input capture can be sacrificed.

The bandwidth required by any input source can be expressed as follows:

$$BW = res_x \times res_y \times fps \times k_{pixel\_factor}$$

Where *fps* and *kpixel\_factor* represent the number of frames per second and the number of bytes taken by each pixel, respectively. In analog RGB, component and DVI modes each pixel generally requires 4 bytes. In TV modes (or when data is represented as 16-bit YUV data) each pixel requires 2 bytes.

The table below provides a summary of pixel factors for different pixel depths and pixel formats.

	4:4:4	4:2:2	4:2:0
8-bit	4	2	1.5
10-bit	6	4	3

For example, a high-definition source being captured at 1920×1080p60 requires the following bandwidth:

$$BW_{1080p} = 1920 \times 1080 \times 60 \times 4 \approx 500\text{MB/s}$$

An NTSC source at 60 Hz (interlaced) requires the following bandwidth:

$$BW_{NTSC} = 720 \times 480 \times 30 \times 2 \approx 21\text{MB/s}$$

Here are some examples of approximate bandwidths based on resolution/pixel formats:

	4:4:4	4:2:2	4:2:0
3840 × 2160 @ 30 Hz	1000 MB/s	500 MB/s	375 MB/s
1920 × 1080 @ 60 Hz	500 MB/s	250 MB/s	185 MB/s

For more information on video sampling and formats, see the following resources:

- Recommended 8-bit YUV formats for video rendering  
([msdn.microsoft.com/en-us/library/windows/desktop/dd206750\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/dd206750(v=vs.85).aspx))
- 10-bit and 16-bit YUV video formats ([msdn.microsoft.com/en-us/library/windows/desktop/bb970578\(v=vs.85\).aspx](http://msdn.microsoft.com/en-us/library/windows/desktop/bb970578(v=vs.85).aspx))

Regardless of the resolutions and formats of the various inputs, the available system bandwidth shouldn't be exceeded. Doing so will result in reduced system performance and/or instability.

## PCI Express architecture overview

To understand how system architecture plays a role in the available bandwidth, a basic understanding of the PCI Express architecture is helpful. This section provides a brief description of the PCI Express architecture to provide enough background to understand the bandwidth calculations provided later in this discussion.

PCI Express is a point-to-point serial transmission interface using high-speed differential signaling to enable high-performance transfer of data within systems. The initial PCIe specification defined a 2.5 Gb/s data transfer rate per lane, while second generation PCIe increased the data rate to 5 Gb/s. The third generation of PCI Express has further increased the data transfer rate to 8 Gb/s per lane of data. The table below summarizes the data transfer capabilities of the PCI Express architecture based on generation and link width (the link width is the *size* of the electrical connection between two PCI Express devices).


The PCI Express specification also defines backward-compatibility between PCI Express devices. That is, a device designed for Gen-3 PCI Express functions at Gen-2 speeds when connected to a Gen-2 device, a Gen-2 device functions at Gen-1 speeds when connected to a Gen-1 device, and so on.

Link width*	PCIe Gen-1	PCIe Gen-2	PCIe Gen-3†
x1	250 MB/s	500 MB/s	1 GB/s
x4	1 GB/s	2 GB/s	4 GB/s
x8	2 GB/s	4 GB/s	8 GB/s
x16	4 GB/s	8 GB/s	16 GB/s

\* The link width provides a measure of the data transfer capabilities of the link in a single direction. Since each PCI Express lane contains both an upstream and a downstream link, the effective bandwidth is doubled. The numbers in this table represent the maximum bandwidth available in each direction.


† While the serial data rate has only increased from 5 Gb/s to 8 Gb/s over second generation PCI Express, the encoding of the serial data has changed, providing more efficient transfers and effectively doubling the data transmission rate over Gen-2 PCI Express.

To maximize data transfer capabilities within a system, having the largest lane widths possible throughout the system is preferred. An ideal system for display wall applications provides PCIe x16 links for all add-in cards, maximizing throughput at each communication link.

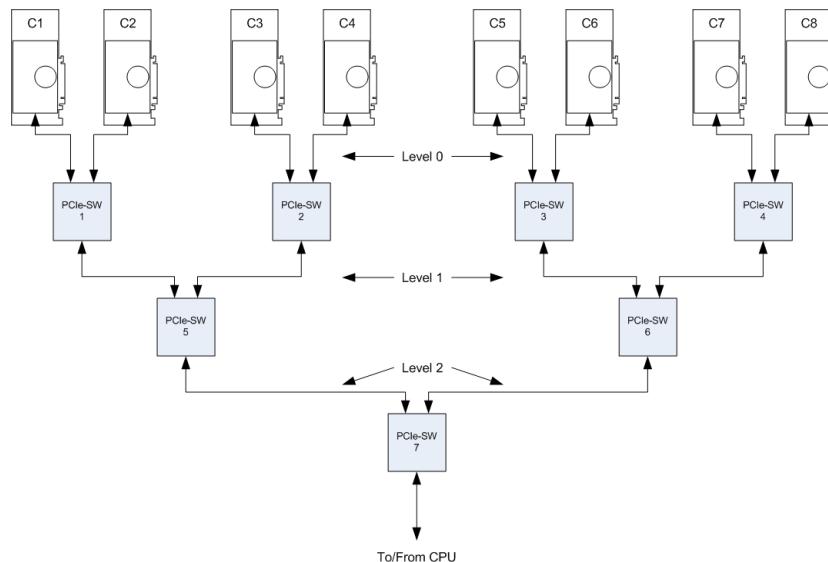


In the diagram above, assume that each PCI Express link is a  $\times 8$  connection operating at Gen-2 speeds. Each link thus has a total available throughput of 4 GB/s in each direction. Any combination of input streams being transferred through a given switch that results in the total bandwidth exceeding 4 GB/s will result in reduced system performance (stuttering playback and reduced frame rates).

Consider the following Mura MPX Series example:

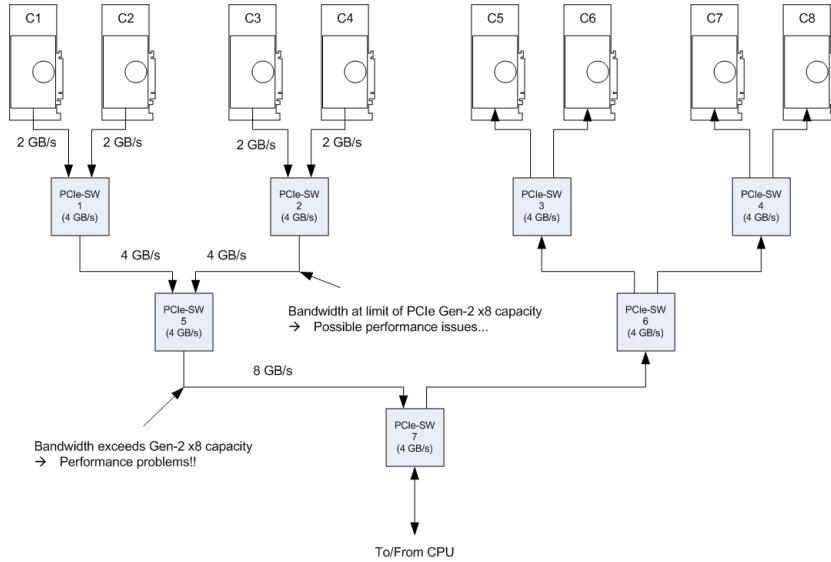


Each GPU transmits two HD streams to a Mura card located at the other “end” of the system (C4-C7). This results in a total bandwidth of approximately 2 GB/s per card (2 GPUs per card, each transmitting two HD stream at approximately 500 MB/s per stream) that has to be transferred through the PCIe fabric. The combined bandwidth of the first two Mura cards connected to the first-level PCIe switches (C1 and C2 → PCIe-SW #1) is 4 GB/s, which is at the very limit of the link’s capability (while the burst capability of the link is indeed 4 GB/s, there’s a link overhead that must be accounted for. This will reduce the effective limit of data that can be transferred. The amount of the reduction is dependent on the PCIe switch architecture, and may be as high as 25–35%). We can already expect bandwidth-related artifacts on the outputs. If we go a level deeper (PCIe-SW #5), the combined bandwidth of the first four Mura cards is almost 8 GB/s, greater than the capacity of the PCIe switches to handle (these are  $\times 8$  links).

Now consider the following scenario:

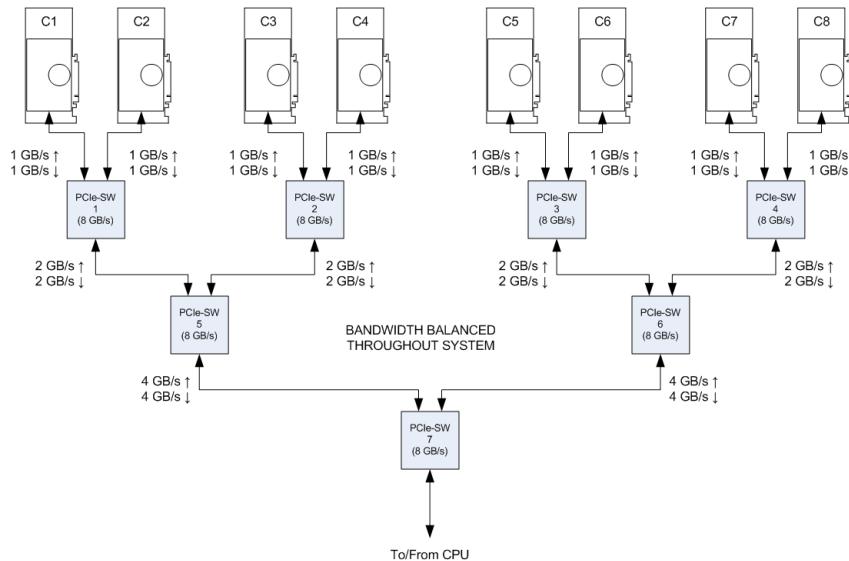

This configuration is an example of how inputs and outputs should be placed whenever possible. In this case, each card is transferring the equivalent of two HD streams to the other “side” of the system, but because the bandwidth at each link remains below the capacity of the switches, there’s no problem and the system will function properly.

The diagram below illustrates a configuration containing Mura MPX Series display adapters and Mura IPX Series capture cards in a system based on a switch-based architecture.

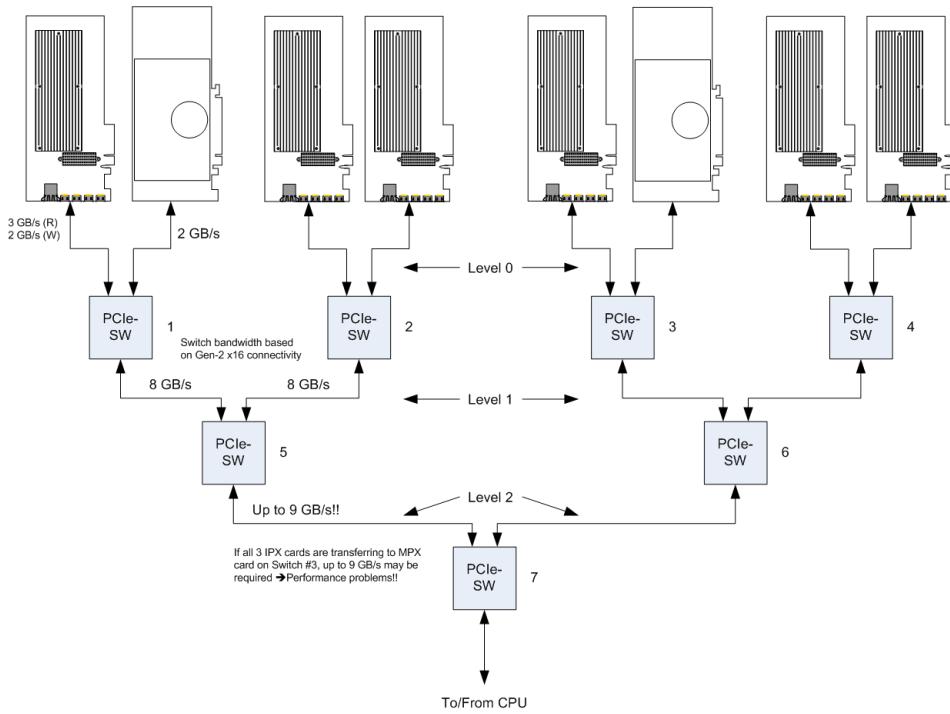

When installing many cards in a system like this, it's important to maximize transfer bandwidth. This is done by ensuring that capture cards are (as much as possible) not all placed on the same bus segments. Placing many capture cards on the same bus segment may create bottlenecks that can hinder performance and lower the overall capture rate. The manner in which inputs are mapped to output boards can also have an impact. When possible, inputs should be captured as close to the display card as possible to minimize system latency and maximize overall system bandwidth. As an example, in the above illustration, if the 3 Mura IPX Series cards on switches 1 and 2 are capturing data to be displayed on the Mura MPX Series card connected to switch 3, up to 9 GB/s of bandwidth may be required (depending on the number of inputs and their resolutions). This is above the maximum bandwidth of the bus segment connecting switches 5 and 7, and will result in performance issues (lower/stuttering frame rate transfer) or will require the data to be pre-scaled before its transfer to the output.

It's impossible to cover all possible configurations of input and output cards in this document – indeed each situation will be different. However, knowledge of the system architecture and judicious placement of the capture and display cards based on the desired input/output mappings will allow virtually any bandwidth requirements to be met.


## General bandwidth guidelines

Knowledge of the system architecture and the number and types of inputs is required to optimally place capture cards in the system. By carefully calculating the required bandwidth and ensuring that there are no data bottlenecks in the system, the integrator can guarantee the optimal functioning of the Mura MPX Series based and C-Series based display wall.

## A word about system architectures

We've assumed up this point that systems used for Mura MPX Series based and C-Series based display walls will be based on a switched architecture (that is, the PCI Express connectors are connected to PCI Express switches that form the backbone of the system architecture) for the purpose of providing multiple PCIe slots for add-in cards. There are, however, system motherboards that provide a small number of slots that don't use a switch-based architecture, but rather use the QPI interface between CPU chipsets to *bridge* the gap between groups of PCIe slots (see diagram below). Systems based on this architecture don't perform as well as display wall platforms. The QPI interface itself has

limited bandwidth that makes it unsuitable for transferring large amounts data (as is the case for a display wall system). At best, the system could be suitable for applications requiring very limited streaming of SD only inputs, or a single graphics-type input at a resolution requiring less than the available QPI bandwidth (system dependent).

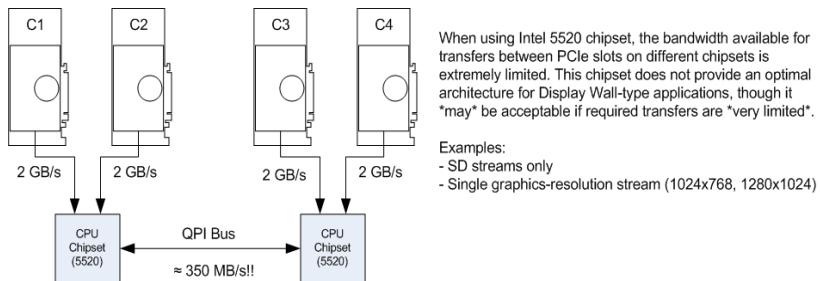

Any multi-processor system using the QPI bus is likely to see performance issues when used for capture/display of multiple streams. The QPI architecture wasn't designed with high-performance multi-media data transfers in mind, and multi-processor systems based on this architecture should be avoided when possible. Switch-based architectures generally provide a more balanced and efficient backbone for the transfer of multiple video/graphics streams.

---

# Appendix

## Approved fans for iStarUSA® D-400-2F80 chassis

<b>Notes</b>	<p>List of approved fan vendors:</p> <ul style="list-style-type: none"><li>▪ Sunon: PMD1212PTB3-A (2).GN</li><li>▪ Yen-Sun: FD121225EB</li><li>▪ Delta: AFB1212HHE-C</li><li>▪ Adda: AG12012XB257100</li><li>▪ NMB: 4715KL-04W-B40</li></ul> <p>To assemble the fan connectors to the lead wires on the fan, the following parts are needed:</p> <ul style="list-style-type: none"><li>▪ Molex 15-24-4048 (Crimp housings)</li><li>▪ Molex 02-08-1201 (Female crimp connectors)</li></ul> <p>Depending on the voltage rating of the fan, the pin placement is the following:</p> <ul style="list-style-type: none"><li>▪ Pin 1: +12V</li><li>▪ Pin 2: GND (usually the black lead from the fan)</li><li>▪ Pin 3: GND (only one of the two GND pins needs be connected)</li><li>▪ Pin 4: +5V (leave unconnected if connecting a 12V fan)</li></ul> <p><b>Warning:</b> The fan may not work properly or may be damaged if the pins aren't properly connected.</p>
--------------	---

---

## Contact us

The Matrox Web site has product literature, press releases, technical material, a sales office list, trade show information, and other relevant material. Visit us at [www.matrox.com/video](http://www.matrox.com/video).

If you have any questions or comments about our products or solutions, contact us at [www.matrox.com/en/video/forms/contact/general](http://www.matrox.com/en/video/forms/contact/general).

You can get technical assistance by contacting Matrox technical support at [dwcsupport@matrox.com](mailto:dwcsupport@matrox.com).

---

## Disclaimer

Information in this document may contain technical inaccuracies or typographical errors. Information may be changed or updated without notice. Matrox reserves the right to make improvements and/or changes in the products, programs and/or specifications described in this information at any time without notice. All trademarks and trade names, service marks and logos referenced herein belong to their respective owners.

ASUS Trademark is either a US registered trademark or trademark of Asustek Computer Inc. in the United States and/or other countries. Reference to any ASUS products, services, processes, or other information and/or use of ASUS Trademarks does not constitute or imply endorsement, sponsorship, or recommendation thereof by ASUS.

Dell and Precision are trademarks or registered trademarks of Dell Inc.

DisplayPort is a trademark of VESA.

HDMI is a registered trademark of HDMI Licensing, LLC in the United States and/or other countries.

HP is a registered trademark of the Hewlett-Packard Development Company, L.P. in the U.S. and other countries.

Intel, Core, and Xeon are trademarks or registered trademarks of Intel Corporation in the U.S. and/or other countries.

Linux is a registered trademark of Linus Torvald in the United States and in other countries.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

OpenCL is a trademark of Apple Inc.

OpenGL is a trademark or registered trademark of Silicon Graphics, Inc. in the United States and/or other countries worldwide.

PCIe and PCI Express are registered trademarks and/or service marks of PCI-SIG.

Copyright © 2021 Matrox is a registered trademark of Matrox Graphics Inc. All rights reserved.

**Matrox Graphics Inc.**

1055 Saint Regis Boulevard  
Dorval, Quebec, Canada H9P 2T4  
(514) 822-6000

[video@matrox.com](mailto:video@matrox.com)  
[www.matrox.com/video](http://www.matrox.com/video)

The Matrox logo consists of the word "matrox" in a bold, lowercase, sans-serif font. A registered trademark symbol (®) is positioned at the top right corner of the letter "x".