

# Matrox® **Display Wall**

**Mura™ C4K Series • Mura™ IPX Series • LUMA Pro Series™**

System Builder's Guide

20349-101-0104  
2025.04.17

[video.matrox.com](https://video.matrox.com)

**matrox**®  
— video —

---

# Contents

<b>Product overview .....</b>	<b>4</b>
Hardware summary – Mura IPX Series .....	4
MURAIPXI-E4SF/MURAIPXI-E4SHF .....	4
MURAIPXI-E2MF/MURAIPXI-E2MHF .....	5
MURAIPXI-D2MF/MURAIPXI-D2MHF .....	6
MURAIPXI-E4JF/MURAIPXI-E4JHF .....	7
MURAIPXI-D4JF/MURAIPXI-D4JHF .....	8
Hardware summary – Matrox LUMA Pro Series .....	9
Matrox LUMA A380P .....	9
Matrox LUMA A310FP .....	10
Hardware summary – Mura C4K Series .....	11
Matrox Mura C4K .....	11
Matrox Mura C4KH .....	12
<b>Why choose a validated platform? .....</b>	<b>13</b>
Platforms validated by Matrox .....	13
Validated systems .....	13
Validated motherboards .....	13
Validated chassis .....	14
LUMA Pro Series system requirements .....	14
<b>Validated systems .....</b>	<b>15</b>
Before you begin .....	15
LUMA Pro Series based video wall system .....	15
Currently supported systems .....	16
Dell Precision T5860 Workstation .....	17
Dell Precision T7960 Workstation .....	19
HP Z8 G5 Workstation .....	21
Shuttle XH510G2 .....	23
Supermicro SYS-540A-TR .....	24
Supermicro SYS-551A-T .....	26
<b>Validated motherboards .....</b>	<b>28</b>
Currently supported motherboards .....	28
ASUS Pro WS W790-ACE .....	29
ASUS Pro WS W790E-SAGE SE .....	31
ASUS WS C422 SAGE/10G .....	33
Gigabyte MW83-RP0 .....	35
MSI MEG Z790 ACE .....	37
Supermicro X12SPA-TF .....	39
Supermicro X13SWA-TF .....	41
<b>Validated chassis .....</b>	<b>43</b>
Currently supported chassis .....	43
Chenbro RM41300 FS81 .....	43
Rosewill RSV-L4000U .....	43
Supermicro CSE-747BTS-R2K20BP chassis .....	44

System ventilation..... 45

Power supply sizing for Matrox LUMA Pro Series based systems ..... 46

Shipping an integrated system.....46

PCI Express® bandwidth considerations in Matrox LUMA Pro Series and Mura IPX Series based systems.. 47

Input source bandwidth requirements .....47

PCI Express architecture overview .....47

General bandwidth guidelines .....48

A word about system architecture and performance .....48

Contact us..... 50

Disclaimer..... 51

# Product overview



Mura IPX Series products are PCIe ×8 Gen 2.0 cards that provide high-density capture, encode, and decode functionality to enhance video walls and operator workstations with advanced video processing and networking capabilities.

## Hardware summary – Mura IPX Series

The Matrox Mura IPX Decode and IPX Encode/Decode Series of products include the following key features:



- Multi-channel 4K/HD/SD encode and decode over standard IP
- DisplayPort™, SDI, and HDMI® capture, IP encode, and IP decode support on a single card
- Flexible stream and record capabilities anywhere on the network
- Separate on-board network interface controller for zero impact on the system
- RGB 10:10:10 and 8:8:8 plus YUV 4:4:4, 4:2:2, and 4:2:0 color space support
- Ideal for control rooms, operation centers, board rooms and other mission critical environments as well as digital signage and presentation systems.

### MURAIPXI-E4SF/MURAIPXI-E4SHF

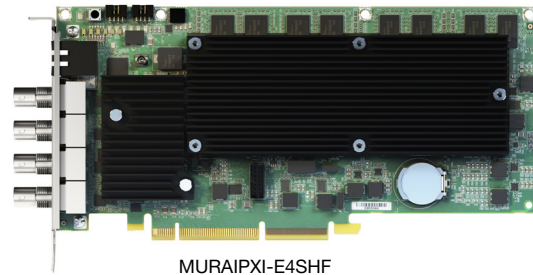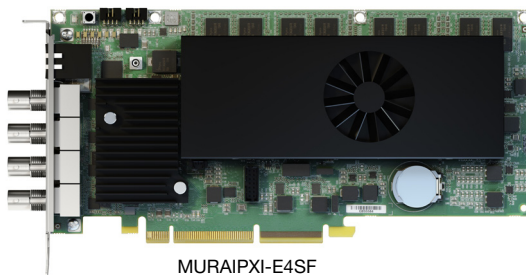



	MURAIPXI-E4SF	MURAIPXI-E4SHF
<b>Part number</b>	MURAIPXI-E4SF	MURAIPXI-E4SHF
<b>Card type</b>	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)	PCIe ×16 2.0 (×16 mechanical, ×8 electrical)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	4× BNC 1x 100/1000 Base-T RJ45 Ethernet Port	4× BNC 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	4× SDI + IP	4× SDI + IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Power consumption</b>	Typical: 27.12 W @ 12 V, 6.27 W @ 3.3 V, or 33.39 W Total	Typical: 27.12 W @ 12 V, 6.27 W @ 3.3 V, or 33.39 W Total
<b>Weight</b>	398 g	334 g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPXI-E2MF/MURAIPXI-E2MHF

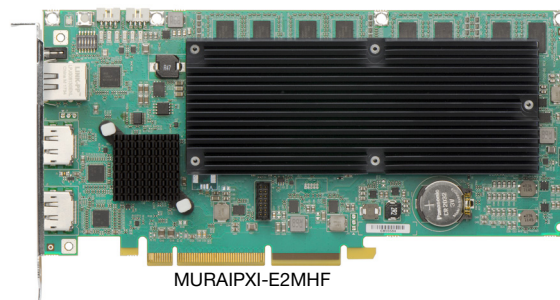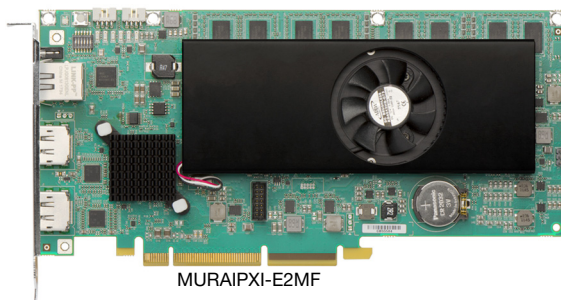


	MURAIPXI-E2MF	MURAIPXI-E2MHF
<b>Part number</b>	MURAIPXI-E2MF	MURAIPXI-E2MHF
<b>Card type</b>	PCIe x16 2.0 (x16 mechanical, x8 electrical)	PCIe x16 2.0 (x16 mechanical, x8 electrical)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	2x DisplayPort 1.2 + IP	2x DisplayPort 1.2 + IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Power consumption</b>	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
<b>Weight</b>	304 g	268 g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPIXI-D2MF/MURAIPIXI-D2MHF

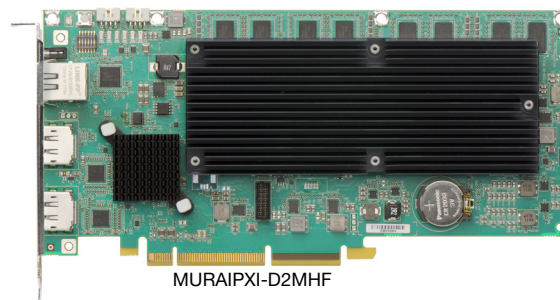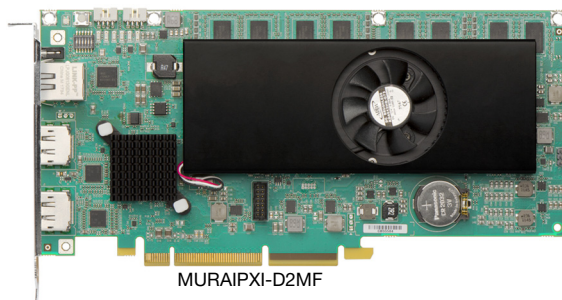


	MURAIPIXI-D2MF	MURAIPIXI-D2MHF
<b>Part number</b>	MURAIPIXI-D2MF	MURAIPIXI-D2MHF
<b>Card type</b>	PCIe x16 2.0 (x16 mechanical, x8 electrical)	PCIe x16 2.0 (x16 mechanical, x8 electrical)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port	2x DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	2x DisplayPort 1.2 + IP	2x DisplayPort 1.2 + IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	—	—
<b>Power consumption</b>	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
<b>Weight</b>	304 g	268 g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

## MURAIPXI-E4JF/MURAIPXI-E4JHF

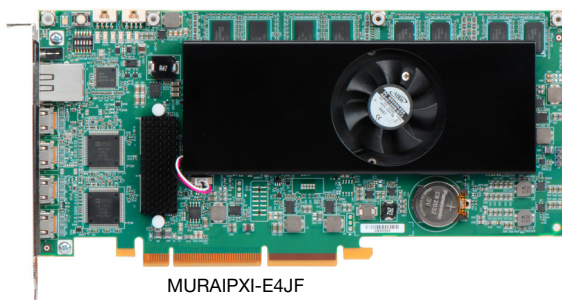



MURAIPXI-E4JF

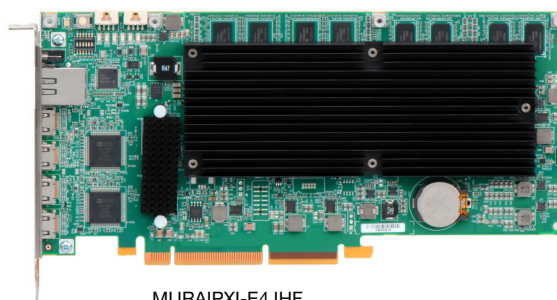

MURAIPXI-E4JHF

	MURAIPXI-E4JF	MURAIPXI-E4JHF
<b>Part number</b>	MURAIPXI-E4JF	MURAIPXI-E4JHF
<b>Card type</b>	PCIe x16 2.0 (x8 2.0 electrically)	PCIe x16 2.0 (x8 2.0 electrically)
<b>Form factor</b>	ATX	ATX
<b>Connector</b>	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port
<b>Memory</b>	8 GB	8 GB
<b>Output support</b>	—	—
<b>Input support</b>	4x HDMI, IP	4x HDMI, IP
<b>Decode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Encode support</b>	Multi-channel 4K H.264	Multi-channel 4K H.264
<b>Power consumption</b>	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
<b>Weight</b>	312 g	278 g
<b>Dimensions</b>	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
<b>Regulatory compliance</b>	Class A: FCC, CE, RCM, ICES-3, CSA, KC	

**MURAIPXI-D4JF/MURAIPXI-D4JHF**

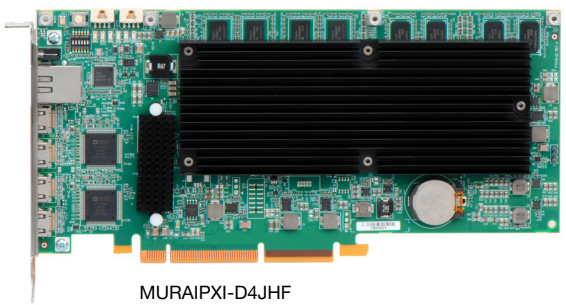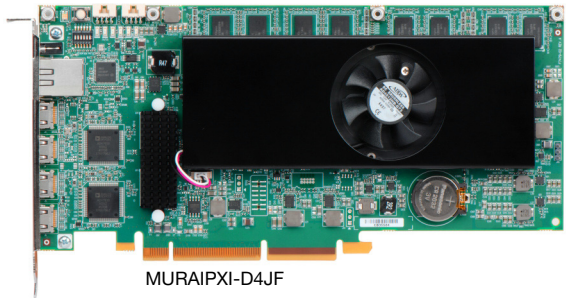


	MURAIPXI-D4JF	MURAIPXI-D4JHF
Part number	MURAIPXI-D4JF	MURAIPXI-D4JHF
Card type	PCIe x16 2.0 (x8 2.0 electrically)	PCIe x16 2.0 (x8 2.0 electrically)
Form factor	ATX	ATX
Connector	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port
Memory	8 GB	8 GB
Output support	—	—
Input support	4x HDMI, IP	4x HDMI, IP
Decode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Encode support	—	—
Power consumption	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
Weight	304 g	268 g
Dimensions	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
Regulatory compliance	Class A: FCC, CE, RCM, ICES-3, CSA, KC	

## Hardware summary – Matrox LUMA Pro Series

The Matrox LUMA Pro Series family of products includes the following key features:

- Pair up to four (4) LUMA Pro Series cards for up to 16x synchronized 2x 8K @60Hz/5K @120Hz or 4x 5K @ 60Hz HDR 12b outputs
- Support for an over-the-top ribbon synchronization cable (no need for additional synchronization card)
- PCIe 4.0 x16 (x8 electrical) bus interface for higher bandwidth capabilities
- HDCP compliant when used with Matrox Mura IPX HDMI Capture Series cards (as of Mura 4.03.00 driver version)
- Multi-channel H.264/H.265 IP stream decoding using built-in GPU advanced media codec engine
- Matrox LUMA A380P – Four DisplayPort 2.1 outputs, each with a maximum resolution of 2x 8K @60Hz/5K @120Hz or 4x 5K @ 60Hz HDR 12b
- Matrox LUMA A310FP – Four Mini DisplayPort 2.1 outputs, each with a maximum resolution of 2x 8K @60Hz/5K @120Hz or 4x 5K @ 60Hz HDR 12b
- Microsoft® DirectX 12.0 support enables latest professional applications
- Ideal for control rooms, operation centers, board rooms, and other critical environments as well as digital signage and presentation systems


### Matrox LUMA A380P

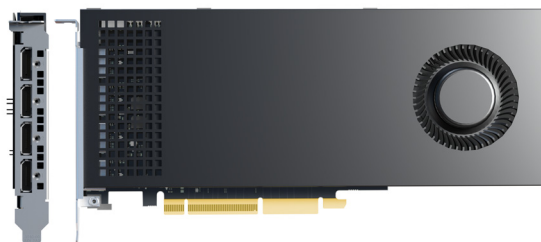

	Matrox LUMA A380P
Part number	LUMA-A380P
Card type	PCIe 4.0 x16 (x8 electrical)
Form factor	Full Height
Connector	4 x DisplayPort
Memory	6 GB GDDR6
Output support	4
Input support	—
Decode support	Multi-channel H.264 (up to 4K) and H.265 (up to 8K)
Encode support	—
Power consumption	75 W Total
Weight	547 g
Dimensions*	L: 9.99 in / W: 0.737 in / H: 4.99 in L: 25.38 cm / W: 1.872 cm / H: 12.68 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC, UKCA, CSA

\* Length and height dimensions are with fansink and bracket.

**Matrox LUMA A310FP**

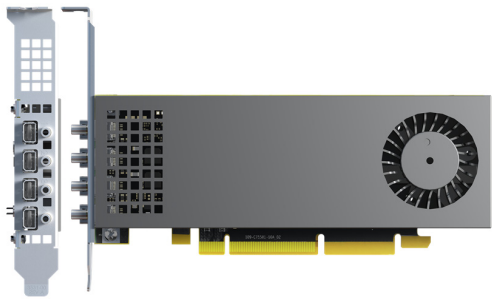

	Matrox LUMA A310FP
Part number	LUMA-A310FP
Card type	PCIe 4.0 x16 (x8 electrical)
Form factor	Low profile
Connector	4 x Mini DisplayPort
Memory	4 GB GDDR6
Output support	4
Input support	—
Decode support	Multi-channel H.264 (up to 4K) and H.265 (up to 8K)
Encode support	—
Power consumption	50 W Total
Weight	179 g
Dimensions*	L: 6.6 in / W: 0.737 in / H: 2.7 in L: 16.76 cm / W: 1.872 cm / H: 6.86 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC, UKCA, CSA

\* Length and height dimensions are with fansink and bracket.


## Hardware summary – Mura C4K Series

The Matrox Mura C4K Series includes the following key features:

- Quad HDMI capture up to 4 x 4Kp60 per card
- PCIe x8 Gen 3.0 (x16 mechanical, x8 electrical) fan and fanless design
- Capture HDCP v1.4/v2.3 sources when paired with Matrox LUMA Pro Series\*
- Ideal for control rooms, digital signage, AV presentation and other applications that require high-density HDMI streams

**Note:** \* To be supported in a future release via software update.

### Matrox Mura C4K

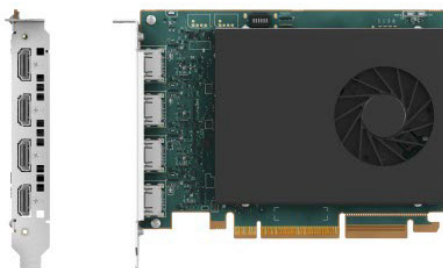

	Matrox Mura C4K
Part number	MURA-C4K
Card type	PCIe x16 3.0 (x16 mechanical, x8 electrical)
Form factor	ATX, half length, single slot
Connector	4 x HDMI
Memory	2 GB
Output support	—
Input support	4 x HDMI 2.1
Power consumption	29.8 W Typical, 32 W Max
Weight	264 g
Dimensions	L: 5.953 in / W: 0.75 in / H: 4.724 in L: 15.120 cm / W: 1.91 cm / H: 12.615 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC

## Matrox Mura C4KH



	Matrox Mura C4KH
<b>Part number</b>	MURA-C4KH
<b>Card type</b>	PCIe x16 3.0 (x16 mechanical, x8 electrical)
<b>Form factor</b>	ATX, half length, single slot
<b>Connector</b>	4 x HDMI
<b>Memory</b>	2 GB
<b>Output support</b>	—
<b>Input support</b>	4 x HDMI 2.1
<b>Power consumption</b>	29.8 W Typical, 32 W Max
<b>Weight</b>	298 g
<b>Dimensions</b>	L: 5.953 in / W: 0.75 in / H: 4.724 in L: 15.120 cm / W: 1.91 cm / H: 12.615 cm
<b>Regulatory compliance</b>	Class A: CE, FCC, ICES-3, RCM, KC

# Why choose a validated platform?

Matrox display wall products are designed for control rooms, operation centers, and other critical environments that require stable, reliable, and durable solutions. Matrox display wall products work in numerous non-validated, commercial-off-the-shelf (COTS) motherboards and systems, but only a select few of these off-the-shelf solutions can be thoroughly tested, verified, and validated by Matrox. Choosing a validated platform guarantees a high-quality solution to drive your display wall system.

Some of the key benefits of using a Matrox-validated platform include:

- **Optimized performance** – Carefully selected by Matrox to ensure better performance, a validated platform guarantees that your display wall product will work at or close to optimum performance.
- **Extensive validation process** – Systems are put to the test by Matrox Engineering, QA, Sales, and Marketing departments. From development and testing to sales and product demos, our employees use these systems in various practices to monitor performance. Using a validated platform guarantees the same level of performance experienced by Matrox staff.
- **Easier deployment** – Using an already validated system takes the guesswork out of building a display wall system. Integrators can use a validated platform to quickly and easily deploy solutions across a wide range of project sizes.
- **Faster customer support** – Customer support is faster, easier, and more precise because our technical support team is already familiar with the validated system you're using.
- **Uncompromised compatibility** – Using a validated platform ensures that your display wall product has been thoroughly tested and verified for uncompromised compatibility.
- **Improved reliability** – Systems validated by Matrox have guaranteed thermal and ventilation characteristics, resulting in better product longevity.

## Platforms validated by Matrox

Matrox is constantly reviewing new systems and looking to validate new platforms across multiple price points. Any system suggestions are welcome. The following tables are summaries of the active list.

### Validated systems

Validated System	Maximum number of boards supported per system
Dell Precision T5860 Workstation	4
Dell Precision T7960 Workstation	8
HP Z8 G5 Workstation	6
Shuttle XH510G2	1
Supermicro SYS-540A-TR	7
Supermicro SYS-551A-T	6

### Validated motherboards

Validated motherboard	Maximum number of boards supported per system
ASUS Pro WS W790-ACE	5
ASUS Pro WS W790E-SAGE SE	7
ASUS WS C422 SAGE/10G	7
Gigabyte MW83-RP0	7

Validated motherboard	Maximum number of boards supported per system
MSI MEG Z790 ACE	3
Supermicro X12SPA-TF	7
Supermicro X13SWA-TF	6

## Validated chassis

Validated chassis	Currently supported motherboards
Chenbro RM41300 FS81	<ul style="list-style-type: none"> <li>ASUS Pro WS W790-ACE</li> <li>ASUS Pro WS W790E-SAGE SE</li> <li>ASUS WS C422 SAGE/10G</li> <li>Gigabyte MW83-RP0</li> <li>MSI MEG Z790 ACE</li> <li>Supermicro X12SPA-TF</li> </ul>
Rosewill RSV-L4000U	<ul style="list-style-type: none"> <li>ASUS Pro WS W790-ACE</li> <li>ASUS Pro WS W790E-SAGE SE</li> <li>ASUS WS C422 SAGE/10G</li> <li>Gigabyte MW83-RP0</li> <li>MSI MEG Z790 ACE</li> </ul>
Supermicro CSE-747BTS-R2K20BP chassis	<ul style="list-style-type: none"> <li>Supermicro X12SPA-TF</li> <li>Supermicro X13SWA-TF</li> </ul>

## LUMA Pro Series system requirements

For LUMA Pro Series based display walls (with or without Mura C4K Series and/or Mura IPX Series cards), the demands and requirements of a system are more generic. To use as a LUMA Pro Series based display wall, a system *must* meet the following requirements:

- The system *must* be properly ventilated and the Mura C4K Series, Mura IPX Series, and LUMA Pro Series cards must not exceed the maximum allowed temperature. For more information, see “System ventilation”, page 45.
- Mura C4K Series and Mura IPX Series cards used in a non-validated system *must* have a fansink.
- The system *must* be populated with at least 64 GB of system memory. Follow the system manufacturer’s guideline for memory population sequence.



**Note:** We recommend choosing memory from the system or motherboard manufacturer’s supported list. The actual memory frequency may differ depending on the CPU types and the memory module used.

---

## Validated systems

The following systems have been validated by Matrox to work with the Matrox Mura C4K Series, the Matrox Mura IPX Series, and the Matrox LUMA Pro Series (A380P and A310FP) products.



**Note:** Ensure that you have the following default settings to launch the Windows operating system:

- In the system BIOS main page, go to **Boot Tab** → **Boot Mode Select** and select **UEFI**.
- In the system BIOS main page, go to **Boot Tab** → **CSM** → **Launch CSM** and select **Disabled**.



**Note:** Ensure that you have the following default settings:

- In the system BIOS, go to **Advanced** → **PCI Subsystem Settings** → **Re-Size Bar** and select **Enabled**.
- In the system BIOS, go to **Advanced** → **PCI Subsystem Settings** → **Above 4G Decoding** and select **Enabled**.

---

## Before you begin

To ensure optimal performance, read the following guidelines before installing your Matrox graphics hardware.

### LUMA Pro Series based video wall system



**Note:** Always insert your *LUMA Pro Series* in the *PCIe® 3.0 / 4.0 / 5.0 ×16* or *×8* slots, your *Mura C4K Series* in the *PCIe® 3.0 / 4.0 / 5.0 ×16* or *×8* slots, and your *Mura IPX Series* cards in the *PCIe® 2.0 / 3.0 / 4.0 / 5.0 ×16* or *×8* slots (×16 or ×8 electrical).

- LUMA Pro Series, Mura C4K Series, and Mura IPX Series – Insert these cards in the PCIe ×16 slots that are ×16 /×8 electrical.



**Note:** LUMA Pro Series cards require Mura 4.02 package or later. Mura IPX Series cards require 4.03 driver or later. Mura C4K Series cards require 4.04 driver or later.

### Supported configurations

- Up to 4 x LUMA A380P graphics cards
- Up to 4 x LUMA A380P with multiple Mura C4K Capture Series cards
- Up to 4 x LUMA A380P with multiple Mura IPX Capture Series cards
- Up to 4 x LUMA A380P with both Mura C4K and Mura IPX Capture Series cards
- Up to 4 x LUMA A310FP graphics cards
- Up to 4 x LUMA A310FP with multiple Mura C4K Capture Series cards
- Up to 4 x LUMA A310FP with multiple Mura IPX Capture Series cards
- Up to 4 x LUMA A310FP with both Mura C4K and Mura IPX Capture Series cards

---

## Currently supported systems

The following systems have been validated by Matrox to work with Matrox Mura C4K Series, Matrox Mura IPX Series, and Matrox LUMA Pro Series products.

Validated system	Maximum number of boards supported per system
Dell Precision T5860 Workstation	4
Dell Precision T7960 Workstation	8
HP Z8 G5 Workstation	6
Shuttle XH510G2	1
Supermicro SYS-540A-TR	7
Supermicro SYS-551A-T	6

## Dell Precision T5860 Workstation

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	4	
Maximum supported Mura C4K Series	-	
Maximum supported Mura IPX Series	-	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Dell Precision T5860	
Chipset	Intel® W790	
Processor	Intel® Xeon® W5-2455, @ 3.2 GHz CPU	
Heatsink (for CPU)	LGA 4677	
System BIOS version	1.1.15, 2023-12-09	
System memory	64 GB (4 x16 GB, DDR5, 4800 MHz)	
Chassis	Mid-size tower	
Power supply	750 W	
PCIe expansion slots	<ul style="list-style-type: none"> <li>▪ 1 PCIe x16 5.0 slot</li> <li>▪ 1 PCIe x16 4.0 slot</li> <li>▪ 2 PCIe x8 4.0 slots</li> <li>▪ 1 PCIe x8 4.0 slot (x8 mechanical x4 electrical)</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>▪ Currently supports only standalone LUMA Pro cards in the system.</li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>Thermal Management</b> → select <b>Ultra Performance</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>Thermal Management</b> → <b>Lower PCIe Slot Zone</b> → select <b>50</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>ASPM</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>Performance</b> → <b>Resizeable Base Address (BAR)</b> → select <b>ON</b>.</li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Update, Recovery</b> → <b>SupportAssist OS Recovery</b> → select <b>OFF</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Update, Recovery</b> → <b>BIOSConnect</b> → select <b>OFF</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Update, Recovery</b> → <b>Dell Auto OS Recovery Threshold</b> → select <b>OFF</b>.</li> </ul> </li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>SystemManagement</b> → <b>Power-on-Self-Test Automatic Recovery</b> → select <b>OFF</b>.</li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>Pre-boot Behavior</b> → <b>Warnings &amp; Errors</b> → select <b>Continue on Warning and Errors</b>.</li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ On-board console supported with 4.02 or later drivers.</li> <li>▪ Third-party controller is unsupported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
SLOT1 PCIe5 x16	LUMA-A310FP	B
SLOT2 PCIe4 x8	LUMA-A310FP	B
SLOT3 PCIe4 x8 (4)	-	-
SLOT4 PCIe4 x16	LUMA-A310FP	B
SLOT5 PCIe4 x8	LUMA-A310FP	B

## Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
SLOT1 PCIe5 x16	x16	B	B	B	B
SLOT2 PCIe4 x8	x8	-	-	B	B
SLOT3 PCIe4 x8 (4)	x4	-	-	-	-
SLOT4 PCIe4 x16	x16	-	B	B	B
SLOT5 PCIe4 x8	x8	-	-	-	B

Option	Product
A	-
B	LUMA-A310FP or LUMA-A380P

## Dell Precision T7960 Workstation

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	8	
Maximum supported Mura C4K Series	7	
Maximum supported Mura IPX Series	-	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Dell Precision T7960	
Chipset	Intel® W790	
Processor	Intel® Xeon® W5-3433X CPU @ 2.0 GHz	
Heatsink (for CPU)	LGA 4677	
System BIOS version	2.7.0, 2024-12-17	
System memory	64 GB (4 x16 GB 4800 MHz ECC DDR5 RDIMM)	
Chassis	Tower	
Power supply	1400 W	
PCIe expansion slots	<ul style="list-style-type: none"> <li>▪ 2 full-height PCIe x16 5.0 slots</li> <li>▪ 2 full-height PCIe x16 4.0 slots</li> <li>▪ 2 full-height PCIe x8 4.0 slots</li> <li>▪ 2 full-height, half-length PCIe x8 4.0 slots (x4 electrical)</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>▪ The system fans' speed must be set to full speed. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>Thermal Management</b> → select <b>Ultra Performance</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>Lower PCIe Slot Zone</b> → select <b>50</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>CPU/Memory Zone</b> → select <b>50</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>Upper PCIe Slot Zone</b> → select <b>50</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Power</b> → <b>Active State Power Management</b> → <b>ASPM</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>Performance</b> → <b>PCIe Resizable Address Register (BAR)</b> → select <b>Enabled</b>.</li> <li>▪ Ensure to have the Primary Video set to Slot1. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Display</b> → <b>Primary Video Slot</b> → change from <b>Auto</b> to <b>Primary card (Slot 1)</b>.</li> </ul> </li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Require 4.04 or later drivers for Mura C4K Series support.</li> <li>▪ Third-party controller is unsupported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
SLOT1PCIe5x16	LUMA-A310FP	B
SLOT2PCIe4x8(4)	MURA-C4K	A
SLOT3PCIe4x8(4)	MURA-C4K	A
SLOT4PCIe4x16	LUMA-A310FP	A, B
SLOT5PCIe5x16	LUMA-A310FP	A, B
SLOT6PCIe4x8	MURA-C4K	A
SLOT7PCIe4x8	MURA-C4K	A
SLOT8PCIe4x16	LUMA-A310FP	A, B

## Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
SLOT1PCIe5x16	x16	B	B	B	B
SLOT2PCIe4x8(4)	x4*	A	A	A	A
SLOT3PCIe4x8(4)	x4*	A	A	A	A
SLOT4PCIe4x16	x16	A	B	B	B
SLOT5PCIe5x16	x16	A	A	B	B
SLOT6PCIe4x8	x8	A	A	A	A
SLOT7PCIe4x8	x8	A	A	A	A
SLOT8PCIe4x16	x16	A	A	A	B

**Note:** \* Mura C4K Series performance is reduced by half when installed in PCIe x4 slot.

Option	Product
A	MURA-C4K or MURA-C4KH
B	LUMA-A310FP or LUMA-A380P

## HP Z8 G5 Workstation

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	6	
Maximum supported Mura C4K Series	-	
Maximum supported Mura IPX Series	5	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19045 Build 19045	
Motherboard	HP Z8 G5	
Chipset	Intel® C741	
Processor	Intel® Xeon® Gold 5416S Dual CPU @ 2.0 GHz	
Heatsink (for CPU)	LGA 4677	
System BIOS version	HP U60 Ver. 01.02.01, 2024-03-07	
System memory	64 GB (4 x16 GB 4800 MHz DDR5 RDIMM)	
Chassis	Tower	
Power supply	1125 W	
PCIe expansion slots	<ul style="list-style-type: none"> <li>▪ 1 PCIe x16 5.0 slot</li> <li>▪ 2 PCIe x16 4.0 slots</li> <li>▪ 1 PCIe x16 3.0 slot</li> <li>▪ 1 PCIe x8 3.0 slot</li> <li>▪ 2 PCIe x4 3.0 slots</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>▪ Ensure to have the front &amp; rear system fans connected directly to the 4-pin fan connectors on the Motherboard to run at full speed.</li> <li>▪ In the system BIOS go to Advanced → System Options → SATA Controller RAID Mode → deselect.</li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to Advanced → Slot Settings → NVME0 → NVME0 → select Disabled.</li> <li>▪ Go to Advanced → Slot Settings → Personality Slot0 → Personality Slot0 → select Disabled.</li> <li>▪ Go to Advanced → Slot Settings → Personality Slot1 → Personality Slot1 → select Disabled.</li> <li>▪ Go to Advanced → Slot Settings → for every PCIe x16 slot → Resizable BARs → select Enabled.</li> </ul> </li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to Advanced → Performance Options → Performance Control → select High Performance Mode.</li> <li>▪ Go to Advanced → Performance Options → Hyperthreading → select Checked.</li> </ul> </li> <li>▪ In the system BIOS, go to Advanced → Sub-NUMA clustering → Performance Control → select Enable SNC4 (4-clusters).</li> <li>▪ In the system BIOS, go to Advanced → Workload Configuration → select I/O Focused.</li> <li>▪ In the system BIOS, go to Advanced → Remote Management Options → Intel Management Engin (ME) → deselect.</li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to Advanced → Power Management Options → Runtime Powere Management → deselect.</li> <li>▪ Go to Advanced → Power Management Options → Extended Idle Power States → deselect.</li> </ul> </li> <li>▪ The Slot 7 - PCIe3 x4 PCH is not used with Luma Pro Series controller.</li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Third-party controller is unsupported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
Slot 1 - PCIe4 x16 CPU0	LUMA-A310FP	B
Slot 2 - PCIe4 x16 CPU1	LUMA-A310FP	A, B

Slot	LUMA Pro Series based controller	
	Main	Option
Slot 3 - PCIe3 x4 CPU0	MURAI PXI-EAJHF	A
Slot 4 - PCIe5 x16 CPU0	LUMA-A310FP	A, B
Slot 5 - PCIe3 x8 CPU0	MURAI PXI-E4JHF	A
Slot 6 - PCIe3 x16 CPU1	LUMA-A310FP	A, B
Slot 7 - PCIe3 x4 PCH	-	-

#### Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
Slot 1 - PCIe4 x16 CPU0	x16	B	B	B	B
Slot 2 - PCIe4 x16 CPU1	x16	A	A	B	B
Slot 3 - PCIe3 x4 CPU0	x4*	A	A	A	A
Slot 4 - PCIe5 x16 CPU0	x16	A	B	B	B
Slot 5 - PCIe3 x8 CPU0	x8	A	A	A	A
Slot 6 - PCIe3 x16 CPU1	x16	A	A	A	B
Slot 7 - PCIe3 x4 PCH	x4	-	-	-	-

**Note:** \* Mura IPX performance in the x4 slot is reduced by half.

Option	Product
A	MURAI PXI-E4SF, MURAI PXI-E4SHF, MURAI PXI-D2MF, MURAI PXI-D2MHF, MURAI PXI-E2MF, MURAI PXI-E2MHF, MURAI PXI-D4JF, MURAI PXI-D4JHF, MURAI PXI-E4JF, or MURAI PXI-E4JHF
B	LUMA-A310FP or LUMA-A380P

## Shuttle XH510G2

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	1
Maximum supported Mura C4K Series	-
Maximum supported Mura IPX Series	-
Maximum supported LUMA Pro Series	1 (LUMA-A310FP only)
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Shuttle XH510G2
Chipset	Intel® H510 Express
Processor	Intel® Core™ i5-11500 CPU @ 2.7 GHz
Heatsink (for CPU)	LGA 1200
System BIOS version	1.10 2023-03-08
System memory	16 GB (2 x8 GB 3200 MHz DDR4 SODIMM Non ECC)
Chassis	5L form factor
Power supply	180 W
PCIe expansion slots	1 PCIe x16 4.0 slot
Notes	<ul style="list-style-type: none"> <li>▪ Only LUMA-A310FP can fit in this chassis. The LUMA-A380P is not supported with this chassis.</li> <li>▪ Optional riser card (PRC02 kit) required to insert add-in LUMA-A310FP card in the PCIe x16 4.0 slot.</li> <li>▪ The chassis fans' speed must be set to full speed. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Hardware Health Configuration</b> → <b>Fan1 Speed Control</b> → set to <b>Full Mode</b>.</li> </ul> </li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>Onboard Device Configuration</b> → <b>PCIeX16 Speed</b> → set to <b>Gen4</b>.</li> <li>▪ PCIeX16 Gen4 option is only available with 11th Core I CPU family.</li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ On-board console supported with 4.02 or later drivers.</li> <li>▪ Third-party controller is unsupported.</li> </ul>

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
PCI-Ex16	LUMA-A310FP	-

## Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1
PCI-Ex16	x16	LUMA-310FP

Option	Product
A	-
B	LUMA-A310FP

## Supermicro SYS-540A-TR

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	7	
Maximum supported Mura C4K Series	6	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Supermicro X12SPA-TF	
Chipset	Intel® C621A	
Processor	Intel® Xeon® W-3323 CPU @ 3.5 GHz	
Heatsink (for CPU)	LGA 4189	
System BIOS version	1.9, 2024-01-04	
System memory	64 GB (8 x8 GB 2400 MHz DDR4 DIMM)	
Chassis	Supermicro CSE-747BTS-R2K20BP	
Power supply	2200 W	
PCIe expansion slots	<ul style="list-style-type: none"> <li>▪ 4 PCIe x16 4.0 slots</li> <li>▪ 3 PCIe x8 4.0 slots (in x16 slots)</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>▪ The chassis fans' speed must be set to <b>Heavy I/O</b> in IPMI.</li> <li>▪ Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, disable the four M.2 slots. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-C01</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-C02</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-C03</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-C04</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ In the system BIOS go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>VGA Priority</b> → select <b>Offboard</b>.</li> <li>▪ Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> </ul> </li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Re-Size Bar</b> → select <b>Enabled</b>.</li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>ACPI Settings</b> → <b>WHEA Support</b> → select <b>Disabled</b>.</li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>Chipset Configuration</b> --&gt; <b>North Bridge</b> → <b>II) Configuration</b> → <b>PCIe ASPM Support (global)</b> → select <b>Disabled</b>.</li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Require 4.04 or later drivers for Mura C4K Series support.</li> <li>▪ Third-party controller is unsupported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
CPUSLOT1PCIe4.0X16	LUMA-A310FP	B
CPUSLOT2PCIe4.0X8(inx16)	MURAIPXI-E4JHF	A
CPUSLOT3PCIe4.0X16	LUMA-A310FP	A, B
CPUSLOT4PCIe4.0X8(inx16)	MURAIPXI-E4JHF	A
CPUSLOT5PCIe4.0X16	LUMA-A310FP	A, B
CPUSLOT6PCIe4.0X8(inx16)	MURAIPXI-E4JHF	A
CPUSLOT7PCIe4.0X16	LUMA-A310FP	A, B


## Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCIe4.0X16	x16*	B	B	B	B
CPUSLOT2PCIe4.0X8(inx16)	x8/x0	A	A	A	A
CPUSLOT3PCIe4.0X16	x16/x8	A	A	B	B
CPUSLOT4PCIe4.0X8(inx16)	x8/x0	A	A	A	A
CPUSLOT5PCIe4.0X16	x16/x8	A	B	B	B
CPUSLOT6PCIe4.0X8(inx16)	x8/x0	A	A	A	A
CPUSLOT7PCIe4.0X16	x16/x8	A	A	A	B

**Note:** \* Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, ensure to disable the four M.2 slots in the system BIOS. Shared slots are 2 & 3, 4 & 5, and 6 & 7.

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
B	LUMA-A310FP or LUMA-A380P

## Motherboard layout

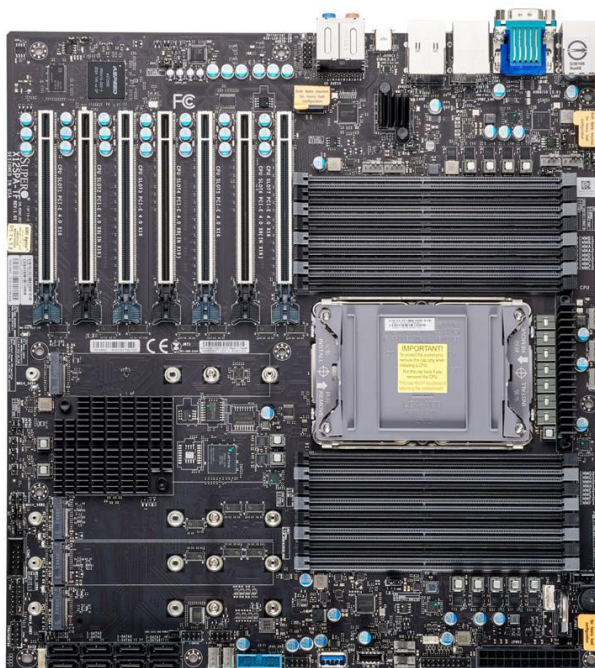

## Supermicro SYS-551A-T

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	6
Maximum supported Mura C4K Series	5
Maximum supported Mura IPX Series	5
Maximum supported LUMA Pro Series	4
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Supermicro X13SWA-TF
Chipset	Intel® W790
Processor	Intel® Xeon® W5-3423 CPU @ 2.1 GHz
Heatsink (for CPU)	LGA 4677 (Part# SNK-P0091AP4)
System BIOS version	2.1b, 2024-05-28
System memory	128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM)
Chassis	Supermicro CSE-GS7A-2000B
Power supply	2000 W
PCIe expansion slots	6 PCIe x16 5.0 slots
Notes	<ul style="list-style-type: none"> <li>Ensure to order the air-cooled configuration for the chassis.</li> <li>One 120 mm x 120 mm x 25 mm 6.4 KRPM optional fan (Part#: FAN-0222L4) must be ordered for the rear fan separately for air-cooled configuration when ordering the system.</li> <li>Two 120 mm x 120 mm x 25 mm <b>59 CFM</b> front fans that come with the system must be replaced with two 120 mm x 120 mm x 25 mm <b>150 CFM</b> fans.</li> <li>The chassis fans' speed must be set to <b>Heavy I/O</b> in IPMI.</li> <li>In the system BIOS go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>VGA Priority</b> → select <b>Offboard</b>.</li> <li>In the Windows device manager, ensure to disable the onboard graphics.</li> <li>Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul style="list-style-type: none"> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> </ul> </li> <li>In the system BIOS, go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Re-Size Bar</b> → select <b>Enabled</b>.</li> <li>In the system BIOS: <ul style="list-style-type: none"> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO1 OPROM</b> → select <b>Disabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO2 OPROM</b> → select <b>Disabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO3 OPROM</b> → select <b>Disabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO4 OPROM</b> → select <b>Disabled</b>.</li> </ul> </li> <li>Ensure to have the following settings for ASPM. In the system BIOS: <ul style="list-style-type: none"> <li>Go to <b>Advanced</b> → <b>Chipset Configuration</b> --&gt; <b>North Bridge</b> → <b>II) Configuration</b> → <b>PCIe ASPM Support (global)</b> → select <b>Disabled</b>.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series support.</li> <li>Require 4.04 or later drivers for Mura C4K Series support.</li> <li>Third-party controller is unsupported.</li> <li>Optional rack-mount kit mounting rails are available (Supermicro Part#: MCP-290-00057-0B).</li> </ul>

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
CPUSLOT1PCIe5.0X16	LUMA-A310FP	A, B
SLOT2 (no connector)	-	-
CPUSLOT3PCIe5.0X16	LUMA-A310FP	A, B


Slot	LUMA Pro Series based controller	
	Main	Option
CPUSLOT4PCIe5.0X16	MURAI PXI-E4JHF	A
CPUSLOT5PCIe5.0X16	LUMA-A310FP	A, B
CPUSLOT6PCIe5.0X16	MURAI PXI-E4JHF	A
CPUSLOT7PCIe5.0X16	LUMA-A310FP	B

#### Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCIe5.0X16	x16	A	A	A	B
SLOT2	No connector	-	-	-	-
CPUSLOT3PCIe5.0X16	x16	A	A	B	B
CPUSLOT4PCIe5.0X16	x16	A	A	A	A
CPUSLOT5PCIe5.0X16	x16	A	B	B	B
CPUSLOT6PCIe5.0X16	x16	A	A	A	A
CPUSLOT7PCIe5.0X16	x16	B	B	B	B

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAI PXI-E4SF, MURAI PXI-E4SHF, MURAI PXI-D2MF, MURAI PXI-D2MHF, MURAI PXI-E2MF, MURAI PXI-E2MHF, MURAI PXI-D4JF, MURAI PXI-D4JHF, MURAI PXI-E4JF, or MURAI PXI-E4JHF)
B	LUMA-A310FP or LUMA-A380P

#### Motherboard layout

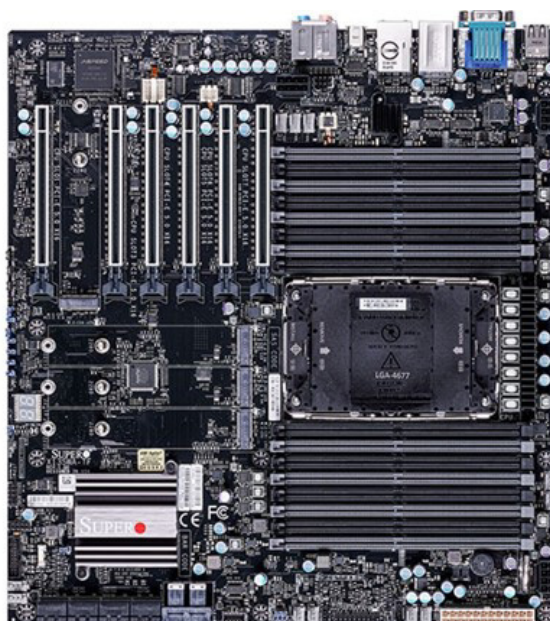

---

## Validated motherboards

The following motherboards have been validated by Matrox to work with Matrox Mura C4K Series, Matrox Mura IPX Series, Matrox LUMA A380P, and Matrox LUMA A310FP products.



**Note:** Ensure to have the following default settings to launch the Windows operating system:

- In the system BIOS main page, go to **Boot Tab** → **Boot Mode Select** → and select **UEFI**.
- In the system BIOS main page, go to **Boot Tab** → **CSM** → **Launch CSM** and select **Disabled**.



**Note:** The motherboard *must* be populated with at least 64 GB of system memory. Follow the system or motherboard manufacturer's guideline for memory population sequence.

- We recommend choosing memory from the system or motherboard manufacturer's supported list. The actual memory frequency may differ depending on the CPU types and the memory module used.



**Note:** Ensure that you have the following default settings:

- In the system BIOS, go to **Advanced** → **PCI Subsystem Settings** → **Re-Size Bar** and select **Enabled**.
- In the system BIOS, go to **Advanced** → **PCI Subsystem Settings** → **Above 4G Decoding** and select **Enabled**.

---

## Currently supported motherboards

The following validated motherboards are currently supported.

Validated motherboard	Maximum number of boards supported per system
ASUS Pro WS W790-ACE	5
ASUS Pro WS W790E-SAGE SE	7
ASUS WS C422 SAGE/10G	7
Gigabyte MW83-RP0	7
MSI MEG Z790 ACE	3
Supermicro X12SPA-TF	7
Supermicro X13SWA-TF	6

## ASUS Pro WS W790-ACE

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	5	
Maximum supported Mura C4K Series	-	
Maximum supported Mura IPX Series	4	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Asus Pro WS W790-ACE	
Chipset	Intel® W790	
Processor	Intel® Xeon® W7-2495X CPU @ 2.5 GHz	
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)	
System BIOS version	0705, 2023-08-09	
System memory	64 GB (4 x 16 GB 4800 MHz ECC DDR5 RDIMM)	
Chassis	Chenbro RM41300-FS81	
Power supply	850 W (Part#: EVGA Supernova 850 P6)	
PCIe expansion slots	5 PCIe x16 5.0 slots (supports x16, x16, x16, x0/x8, x16/x8 modes)	
Notes	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ Only the front chassis fan that comes with the Chenbro chassis must be changed to: <ul style="list-style-type: none"> <li>▪ 120 mm x 120 mm x 25 mm <b>120 CFM</b>.</li> </ul> </li> <li>▪ The chassis fans must run at full speed.</li> <li>▪ The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>▪ Ensure to have the following default settings in the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Re-Size Bar</b> → select <b>Enabled</b>.</li> </ul> </li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Third-party controller is unsupported.</li> <li>▪ Check the Windows Device Manager to ensure all chipset drivers are installed.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
PCIEx16_1(x16)	LUMA-A310FP	B
PCIEx16_2(x16)	MURAIPIXI-E4JHF	A, B
PCIEx16_3(x16)	LUMA-A310FP	A, B
PCIEx16_4(x0/x8)	MURAIPIXI-E4JHF	A
PCIEx16_5(x16/x8)	MURAIPIXI-E4JHF	A, B

Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIEx16_1(x16)	x16	B	B	B	B
PCIEx16_2(x16)	x16	A	A	B	B
PCIEx16_3(x16)	x16	A	B	B	B
PCIEx16_4(x0/x8)	x0/x8	A	A	A	A
PCIEx16_5(x16/x8)	x16/x8	A	A	A	B

Option	Product
A	MURAI PXI-E4SF, MURAI PXI-E4SHF, MURAI PXI-D2MF, MURAI PXI-D2MHF, MURAI PXI-E2MF, MURAI PXI-E2MHF, MURAI PXI-D4JF, MURAI PXI-D4JHF, MURAI PXI-E4JF, or MURAI PXI-E4JHF
B	LUMA-A310FP or LUMA-A380P

Motherboard layout



## ASUS Pro WS W790E-SAGE SE

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	7	
Maximum supported Mura C4K Series	6	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Asus Pro WS W790E-SAGE SE	
Chipset	Intel® W790	
Processor	<ul style="list-style-type: none"> <li>Intel® Xeon® W5-3425 CPU @ 3.2 GHz or</li> <li>Intel® Xeon® W3-2435 CPU @ 3.1 GHz</li> </ul>	
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)	
System BIOS version	1502, 2024-08-30	
System memory	<ul style="list-style-type: none"> <li>128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM) or</li> <li>64 GB (4 x16 GB 4800 MHz ECC DDR5 RDIMM)*</li> </ul>	
Chassis	Rosewill RSV-L4000U 4U	
Power supply	1200 W (Enermax Revolution D.F.2 1200 W; Part#: ERS1200EWT)	
PCIe expansion slots	<ul style="list-style-type: none"> <li>7 PCIe x16 5.0 slots (with Intel® Xeon® W5-3425 CPU) or</li> <li>4 PCIe x16 5.0 slots (Intel® Xeon® W3-2435 CPU)**</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>Power supply isn't included with the chassis.</li> <li>The middle chassis fans inside the Rosewill chassis must be changed to: <ul style="list-style-type: none"> <li>3x 120 mm x 120 mm x 25 mm <b>120 CFM</b>.</li> </ul> </li> <li>To disable onboard VGA, ensure to have the <b>VGA_SW</b> switch disabled on the motherboard.</li> <li>Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul style="list-style-type: none"> <li>Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Resize bar support</b> → select <b>Enabled</b>.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series support.</li> <li>Require 4.04 or later drivers for Mura C4K Series support.</li> <li>Third-party controller is unsupported.</li> <li>* When populated with Intel® Xeon® W-2400 Series processors, memory slots DIMM_C1, DIMM_D1, DIMM_G1, and DIMM_H1 are not supported.</li> <li>** When populated with Intel® Xeon® W-2400 Series processors, slots PCIe16(G5)_2, PCIe16(G5)_4, and PCIe16(G5)_6 are not supported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
PCIEX16(G5)_1	LUMA-A310FP	B
PCIEX16(G5)_2	MURAIPXI-E4JHF	A
PCIEX16(G5)_3	LUMA-A310FP	A, B
PCIEX16(G5)_4	MURAIPXI-E4JHF	A
PCIEX16(G5)_5	LUMA-A310FP	A, B
PCIEX16(G5)_6	MURAIPXI-E4JHF	A
PCIEX16(G5)_7	LUMA-A310FP	A, B


Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIEX16(G5)_1	x16	B	B	B	B
PCIEX16(G5)_2*	x16	A	A	A	A
PCIEX16(G5)_3	x16	A	A	B	B
PCIEX16(G5)_4*	x16	A	A	A	A
PCIEX16(G5)_5	x16	A	B	B	B
PCIEX16(G5)_6*	x8	A	A	A	A
PCIEX16(G5)_7	x16	A	A	A	B

**Note:** \* When populated with Intel® Xeon® W-2400 Series processors, slots PCIEX16(G5)\_2, PCIEX16(G5)\_4, and PCIEX16(G5)\_6 are not supported.

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
B	LUMA-A310FP or LUMA-A380P

Motherboard layout

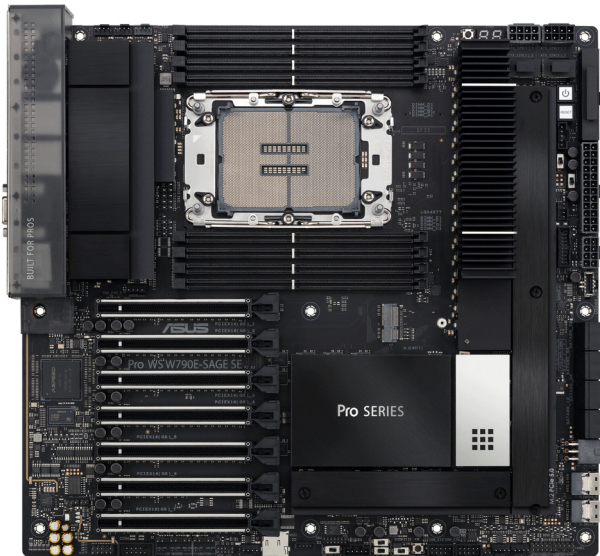

## ASUS WS C422 SAGE/10G

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	7	
Maximum supported Mura C4K Series	-	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise; Version 10.0.19045 Build 19045	
Motherboard	Asus WS C422 SAGE/10G	
Chipset	Intel® C422	
Processor	Intel® Xeon® W-2123 CPU @ 3.6 GHz	
Heatsink (for CPU)	LGA2066	
System BIOS version	4101, 2023-08-25	
System memory	64 GB (8 x 8 GB 2666 MHz ECC DDR4 RDIMM)	
Chassis	Chenbro RM41300-FS81	
Power supply	750 W (Part#: Corsair RM750X)	
PCIe expansion slots	7 PCIe x16 3.0 slots (x16 mechanical, x16/x8 electrical)	
Notes	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ Only the front chassis fan that comes with the Chenbro chassis must be changed to: <ul style="list-style-type: none"> <li>▪ 120 mm x 120 mm x 25 mm <b>120 CFM</b>.</li> </ul> </li> <li>▪ The chassis fans must run at full speed.</li> <li>▪ The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>▪ Ensure to have the following settings. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Boot CSM</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>Platform Misc Configuration</b> → <b>ASPM</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Re-Size Bar</b> → select <b>AUTO</b>.</li> </ul> </li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Third-party controller is unsupported.</li> <li>▪ Check the Windows Device Manager to ensure all chipset drivers are installed.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Option
PCIEx16_1	LUMA-A310FP	B
PCIEx16_2	MURAIPXI-E4JHF	A
PCIEx16_3	LUMA-A310FP	A, B
PCIEx16_4	MURAIPXI-E4JHF	A
PCIEx16_5	LUMA-A310FP	A, B
PCIEx16_6	MURAIPXI-E4JHF	A
PCIEx16_7	LUMA-A310FP	A, B

## Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIEx16_1	x16	B	B	B	B
PCIEx16_2	x4/x8	A	A	A	A
PCIEx16_3	x16/x8	A	A	B*	B*
PCIEx16_4	x0/x8	A	A	A	A
PCIEx16_5	x16/x8	A	B*	B*	B*
PCIEx16_6	x0/x8	A	A	A	A
PCIEx16_7	x16/x8	A	A	A	B*

**Note:** \* The GPU bandwidth is reduced to 6 GB/s instead of 12 GB/s when shared slots are used. Shared slots are 2 & 3, 4 & 5 and 6 & 7.

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	LUMA-A310FP or LUMA-A380P

## Motherboard layout



## Gigabyte MW83-RP0

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	7	
Maximum supported Mura C4K Series	-	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Gigabyte MW83-RP0	
Chipset	Intel® W790	
Processor	Intel® Xeon® W7-3465 CPU @ 2.5 GHz	
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)	
System BIOS version	F12, 2024-04-08	
System memory	128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM)	
Chassis	Chenbro RM41300-FS81	
Power supply	850 W (EVGA Supernova 850 G5; Part#: 220-G5-0850-X1)	
PCIe expansion slots	7 PCIe x16 5.0 slots	
Notes	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ Only the front chassis fan that comes with the Chenbro chassis must be changed to <ul style="list-style-type: none"> <li>▪ 120 mm x 120 mm x 25 mm <b>120 CFM</b>.</li> </ul> </li> <li>▪ The chassis fans must run at full speed.</li> <li>▪ The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>▪ Ensure to have the following setting. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Default Bios Settings</b> → <b>Fan setting</b> → select <b>DC MODE</b>.</li> </ul> </li> <li>▪ Ensure to have the following setting. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCI Subsystem Settings</b> → <b>Re-Size Bar</b> → select <b>AUTO</b>.</li> </ul> </li> <li>▪ Ensure to have the following settings. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Chipset</b> → <b>Miscellaneous Configuration</b> → <b>ACTIVE VIDEO</b> → select <b>PCI DEVICE</b>.</li> <li>▪ Go to <b>Chipset</b> → <b>Miscellaneous Configuration</b> → <b>Decode IO decode for Second GPU</b> → select <b>Enabled</b>.</li> <li>▪ Go to <b>Chipset</b> → <b>Advanced Power Management Configuration</b> → <b>CPU C State Control</b> → <b>Enhance Halt State(C1E)</b> → select <b>Disable</b>.</li> </ul> </li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Third-party controller is unsupported.</li> <li>▪ On-board console supported with 4.02 or later drivers.</li> </ul>	

## Configurations


Slot	LUMA Pro Series based controller	
	Main	Option
PCIE_1(G5x16)	LUMA-A310FP	A, B
PCIE_2(G5x16)	MURAIPIXI-E4JHF	A
PCIE_3(G5x16)	LUMA-A310FP	A, B
PCIE_4(G5x16)	MURAIPIXI-E4JHF	A
PCIE_5(G5x16)	LUMA-A310FP	A, B
PCIE_6(G5x16)	MURAIPIXI-E4JHF	A
PCIE_7(G5x16)	LUMA-A310FP	B

Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIE_1(G5x16)	x16	A	A	A	B
PCIE_2(G5x16)	x16	A	A	A	A
PCIE_3(G5x16)	x16	A	B	B	B
PCIE_4(G5x16)	x16	A	A	A	A
PCIE_5(G5x16)	x16	A	A	B	B
PCIE_6(G5x16)	x16	A	A	A	A
PCIE_7(G5x16)	x16	B	B	B	B

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
B	LUMA-A310FP or LUMA-A380P

Motherboard layout

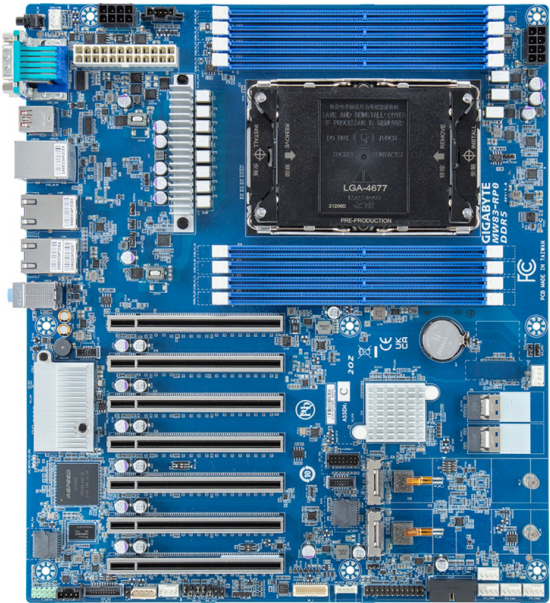

## MSI MEG Z790 ACE

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	3	
Maximum supported Mura C4K Series	-	
Maximum supported Mura IPX Series	2	
Maximum supported LUMA Pro Series	2	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	MSI MEG Z790 ACE	
Chipset	Intel® Z790	
Processor	Intel® Core™ i9-13900K CPU @ 3.0 GHz	
Heatsink (for CPU)	LGA 1700 (Part#: Noctua NH-L12S)	
System BIOS version	1.7 (2023-10-30)	
System memory	64 GB (4 x16 GB 5600 MHz Non ECC DDR5 UDIMM)	
Chassis	Chenbro RM41300-FS81	
Power supply	850 W (Part#: EVGA Supernova 850 P6 or 850 GT)	
PCIe expansion slots	<ul style="list-style-type: none"> <li>▪ 1 PCIe 5.0 slot x16 mechanical and electrical</li> <li>▪ 1 PCIe 5.0 slot x16 mechanical x8 electrical</li> <li>▪ 1 PCIe 4.0 slot x16 mechanical x4 electrical</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>▪ The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>▪ Only the front chassis fan that comes with the Chenbro chassis must be changed to <ul style="list-style-type: none"> <li>▪ 120 mm x 120 mm x 25 mm <b>120 CFM</b>.</li> </ul> </li> <li>▪ The chassis fans' speed must be set to full speed.</li> <li>▪ The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>▪ Ensure to have the following settings. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI Subsystem Settings</b> → <b>Re-Size Bar Support</b> → select <b>Enabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI Subsystem Settings</b> → <b>PCIe Native Power Management</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI Subsystem Settings</b> → <b>Integrated Graphics Configuration</b> → <b>Initiate Graphics Adapter</b> → <b>PEG</b> → select <b>Enabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI Subsystem Settings</b> → <b>Integrated Graphics Configuration</b> → <b>IGD Multi-Monitor</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ M2_4 slot will be unavailable when PCI_E2 slot is populated.</li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Third-party controller is unsupported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Options
PCI_E1x16 (x16/x8)*	LUMA-A310FP	B
PCI_E2x16 (x8)	MURAIPXI-E4JHF	A, B
PCI_E3x16 (x4)	MURAIPXI-E4JHF	A

**Note:** \* PCI\_E1 slot will run at x8 speed when PCI\_E2 slot is populated.

Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2
PCI_E1x16 (x16/x8)*	x16/x8	B	B
PCI_E2x16 (x8)	x8	A	B
PCI_E3x16 (x4)	x4	A	A

Option	Product
A	MURAIPIXI-E4SF, MURAIPIXI-E4SHF, MURAIPIXI-D2MF, MURAIPIXI-D2MHF, MURAIPIXI-E2MF, MURAIPIXI-E2MHF, MURAIPIXI-D4JF, MURAIPIXI-D4JHF, MURAIPIXI-E4JF, or MURAIPIXI-E4JHF
B	LUMA-A310FP or LUMA-A380P

Motherboard layout



## Supermicro X12SPA-TF

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	7	
Maximum supported Mura C4K Series	6	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Supermicro X12SPA-TF	
Chipset	Intel® C621A	
Processor	Intel® Xeon® W-3323 CPU @ 3.5 GHz	
Heatsink (for CPU)	LGA 4189	
System BIOS version	1.9, 2024-01-04	
System memory	64 GB (8 x8 GB 2400 MHz DDR4 DIMM)	
Chassis	Supermicro CSE-747BTS-R2K20BP	
Power supply	2200 W	
PCIe expansion slots	<ul style="list-style-type: none"> <li>4 PCIe x16 4.0 slot</li> <li>3 PCIe x8 4.0 slots (in x16)</li> </ul>	
Notes	<ul style="list-style-type: none"> <li>The chassis fans' speed must be set to <b>Heavy I/O</b> mode in IPMI.</li> <li>Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, disable the four M.2 slots. In the system BIOS: <ul style="list-style-type: none"> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO1</b> → select <b>Disabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO2</b> → select <b>Disabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO3</b> → select <b>Disabled</b>.</li> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO4</b> → select <b>Disabled</b>.</li> </ul> </li> <li>In the system BIOS, go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>VGA Priority</b> → select <b>Offboard</b>.</li> <li>Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul style="list-style-type: none"> <li>Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> </ul> </li> <li>In the system BIOS, go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Re-Size Bar</b> → select <b>Enabled</b>.</li> <li>In the system BIOS, go to <b>Advanced</b> → <b>ACPI Settings</b> → <b>WHEA Support</b> → select <b>Disabled</b>.</li> <li>In the system BIOS, go to <b>Advanced</b> → <b>Chipset Configuration</b> --&gt; <b>North Bridge</b> → <b>II) Configuration</b> → <b>PCIe ASPM Support (global)</b> → select <b>Disabled</b>.</li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.04 or later drivers for Mura C4K Series support.</li> <li>Third-party controller is unsupported.</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Options
CPUSLOT1PCIe4.0X16	LUMA-A310FP	B
CPUSLOT2PCIe4.0X8(inx16)	MURAIPXI-E4JHF	A
CPUSLOT3PCIe4.0X16	LUMA-A310FP	A, B
CPUSLOT4PCIe4.0X8(inx16)	MURAIPXI-E4JHF	A
CPUSLOT5PCIe4.0X16	LUMA-A310FP	A, B
CPUSLOT6PCIe4.0X8(inx16)	MURAIPXI-E4JHF	A
CPUSLOT7PCIe4.0X16	LUMA-A310FP	A, B


## Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCIe4.0X16	x16*	B	B	B	B
CPUSLOT2PCIe4.0X8(inx16)	x8/x0	A	A	A	A
CPUSLOT3PCIe4.0X16	x16/x8	A	A	B	B
CPUSLOT4PCIe4.0X8(inx16)	x8/x0	A	A	A	A
CPUSLOT5PCIe4.0X16	x16/x8	A	B	B	B
CPUSLOT6PCIe4.0X8(inx16)	x8/x0	A	A	A	A
CPUSLOT7PCIe4.0X16	x16/x8	A	A	A	B

**Note:** \* Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, ensure to disable the four M.2 slots in the system BIOS. Shared slots are 2 & 3, 4 & 5 and 6 & 7.

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
B	LUMA-A310FP or LUMA-A380P

## Motherboard layout

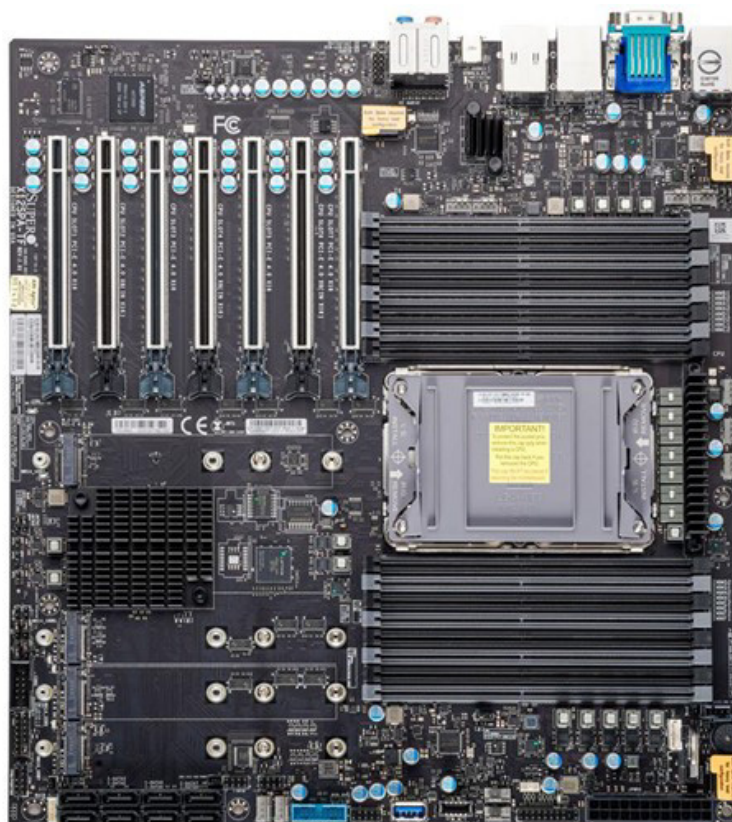

## Supermicro X13SWA-TF

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No
Maximum number of cards supported	6	
Maximum supported Mura C4K Series	5	
Maximum supported Mura IPX Series	5	
Maximum supported LUMA Pro Series	4	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Supermicro X13SWA-TF	
Chipset	Intel® W790	
Processor	Intel® Xeon® W5-3423 CPU @ 2.1 GHz	
Heatsink (for CPU)	LGA 4677 (Part#: SNK-P0091AP4)	
System BIOS version	2.1b, 2024-05-28	
System memory	128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM)	
Chassis	Supermicro CSE-747BTS-R2K20BP	
Power supply	2200 W	
PCIe expansion slots	6 PCIe x16 5.0 slots	
Notes	<ul style="list-style-type: none"> <li>▪ The chassis fans' speed must be set to <b>Heavy I/O</b> mode in IPMI.</li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>VGA Priority</b> → select <b>Offboard</b>.</li> <li>▪ In the Windows device manager, ensure to disable the onboard graphics.</li> <li>▪ Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Above 4G Decoding</b> → select <b>Enabled</b>.</li> </ul> </li> <li>▪ In the system BIOS, go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>Re-Size Bar</b> → select <b>Enabled</b>.</li> <li>▪ In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO1 OPROM</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO2 OPROM</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO3 OPROM</b> → select <b>Disabled</b>.</li> <li>▪ Go to <b>Advanced</b> → <b>PCIe/PCI/PnP Configuration</b> → <b>M.2-CO4 OPROM</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ Ensure to have the following default settings for ASPM. In the system BIOS: <ul style="list-style-type: none"> <li>▪ Go to <b>Advanced</b> → <b>Chipset Configuration</b> --&gt; <b>North Bridge</b> → <b>II) Configuration</b> → <b>PCIe ASPM Support (global)</b> → select <b>Disabled</b>.</li> </ul> </li> <li>▪ Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>▪ Require 4.03 or later drivers for Mura IPX Series support.</li> <li>▪ Require 4.04 or later drivers for Mura C4K Series support.</li> <li>▪ Third-party controller is unsupported.</li> <li>▪ Optional rack-mount kit mounting rails are available (Supermicro part#: MCP-290-00059-0B).</li> </ul>	

## Configurations

Slot	LUMA Pro Series based controller	
	Main	Options
CPUSLOT1PCIe5.0X16	LUMA-A310FP	A, B
SLOT2 (no connector)	-	-
CPUSLOT3PCIe5.0X16	LUMA-A310FP	A, B
CPUSLOT4PCIe5.0X16	MURAI PXI-E4JHF	A
CPUSLOT5PCIe5.0X16	LUMA-A310FP	A, B


Slot	LUMA Pro Series based controller	
	Main	Options
CPUSLOT6PCIe5.0X16	MURAIPXI-E4JHF	A
CPUSLOT7PCIe5.0X16	LUMA-A310FP	B

#### Performance considerations with LUMA Pro Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCIe5.0X16	x16	A	A	A	B
SLOT2	No connector	-	-	-	-
CPUSLOT3PCIe5.0X16	x16	A	A	B	B
CPUSLOT4PCIe5.0X16	x16	A	A	A	A
CPUSLOT5PCIe5.0X16	x16	A	B	B	B
CPUSLOT6PCIe5.0X16	x16	A	A	A	A
CPUSLOT7PCIe5.0X16	x16	B	B	B	B

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
B	LUMA-A310FP or LUMA-A380P

#### Motherboard layout

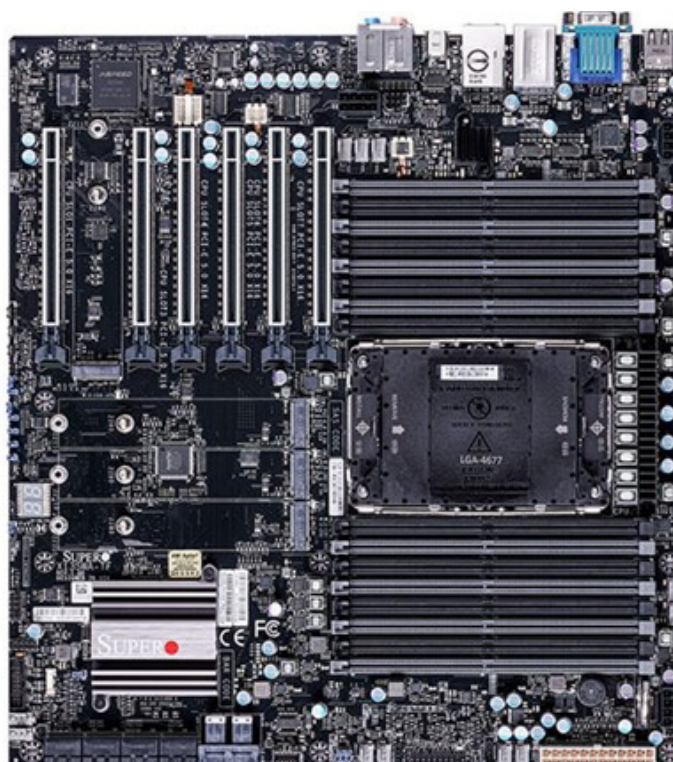

---

## Validated chassis

The following chassis have been validated by Matrox to work with Matrox Mura C4K Series, Matrox Mura IPX Series, Matrox LUMA A380P, and Matrox LUMA A310FP products.

---

### Currently supported chassis

#### Chenbro RM41300 FS81

<b>Cards supported (maximum)</b>	7
<b>Part number</b>	RM41300-FS81 (includes chassis and fans. Power supply is not included.)
<b>Power supply</b>	750 W (Part#: Corsair RM750X / Part#: EVGA SuperNOVA 750 G3) 850 W (Part#: EVGA Supernova 850G3) 1200 W (Enermax Revolution D.F.2 1200 W; Part#: ERS1200EWT)
<b>Power supply bracket</b>	Standard
<b>Fan</b>	<ul style="list-style-type: none"><li>One 120 mm x 120 mm x 25 mm <b>85.5 CFM</b> front fan (included with the chassis)</li><li>Two 80 mm x 80 mm x 25 mm <b>39 CFM</b> rear fans (included with the chassis)</li><li>Two 120 mm x 120 mm x 25 mm <b>85.5 CFM</b> fans on the lid (included with the chassis)</li></ul>
<b>Supported motherboards</b>	<ul style="list-style-type: none"><li>ASUS Pro WS W790-ACE</li><li>ASUS Pro WS W790E-SAGE SE</li><li>ASUS WS C422 SAGE/10G</li><li>Gigabyte MW83-RP0</li><li>MSI MEG Z790 ACE</li><li>Supermicro X12SPA-TF</li></ul>
<b>Notes</b>	<ul style="list-style-type: none"><li>The chassis fans must run at full speed in the system BIOS.</li><li>Only the front chassis fan that comes with the Chenbro chassis must be changed to 120 mm x 120 mm x 25 mm <b>120 CFM</b> fan, purchased separately (Part#: Orion OD1225-12HBIP69K).</li><li>The dust protection filter in the front door must be removed for proper system ventilation.</li></ul>

#### Rosewill RSV-L4000U

<b>Cards supported (maximum)</b>	7
<b>Part number</b>	Rosewill RSV-L4000U (includes bare-bone chassis only)
<b>Power supply</b>	1200 W (Enermax Revolution D.F.2 1200 W; Part#: ERS1200EWT)
<b>Power supply bracket</b>	Standard
<b>Fan</b>	<ul style="list-style-type: none"><li>2 x 120 mm x 120 mm x 25 mm standard front fans (included with the chassis)</li><li>3 x 120 mm x 120 mm x 25 mm <b>113 CFM</b> front fans (included inside the chassis)</li><li>2 x 80 mm x 80 mm x 25 mm standard fans (included with the chassis)</li></ul>
<b>Supported motherboards</b>	<ul style="list-style-type: none"><li>Asus Pro WS W790-ACE</li><li>ASUS Pro WS W790E-SAGE SE</li><li>ASUS WS C422 SAGE/10G</li><li>Gigabyte MW83-RP0</li><li>MSI MEG Z790 ACE</li></ul>
<b>Notes</b>	<ul style="list-style-type: none"><li>Power supply isn't included with the chassis.</li><li>Only the three front fans inside the chassis must be changed to 120 mm x 120 mm x 25 mm <b>120 CFM</b> fans, purchased separately (Part#: Orion OD1225-12HBIP69K).</li></ul>

## Supermicro CSE-747BTS-R2K20BP chassis

<b>Cards supported (maximum)</b>	7
<b>Part number</b>	CSE-747BTS-R2K20BP (includes chassis, 2200 W redundant power supply, and fans)
<b>Power supply</b>	2200 W redundant, model PWS-2K20A-1R
<b>Power supply bracket</b>	Standard
<b>Fan</b>	<ul style="list-style-type: none"><li>▪ Two 92 mm x 92 mm x 38 mm <b>109.7 CFM</b> front fans (Supermicro part#: FAN-0114L4, included with the chassis)</li><li>▪ Two 92 mm x 92 mm x 38 mm <b>150 CFM</b> middle fans (Supermicro part#: FAN-0138L4, included with the chassis)</li><li>▪ Two 80 mm x 80 mm x 38 mm <b>68.3 CFM</b> rear fans (Supermicro part#: FAN-0082L4, included with the chassis)</li></ul>
<b>Supported motherboards</b>	<ul style="list-style-type: none"><li>▪ Supermicro X12SPA-TF</li><li>▪ Supermicro X13SWA-TF</li></ul>
<b>Notes</b>	<ul style="list-style-type: none"><li>▪ The system fan speed must be set to <b>HeavyIO</b> mode in IPMI.</li><li>▪ Optional rack-mount kit mounting rails are available (Supermicro part#: MCP-290-000590B).</li></ul>

---

# System ventilation

Without proper system ventilation, the motherboard and add-in cards will operate at elevated temperatures. Continued operation at elevated temperatures will reduce the life expectancy of the overall system. Mechanical components (such as fans), in particular, experience higher failure rates when exposed to elevated temperatures over long periods of time. The system integrator must verify that the system – and the add-in card area in particular – is properly ventilated. The result is a system that runs cooler, has a longer operating life, and offers higher reliability.



**Note:** To guarantee the longevity of your system and the installed cards, make sure your system is installed in a properly ventilated location. Running Matrox Mura C4K, Mura IPX, and LUMA Pro Series cards above the specified temperatures will lead to permanent damage to the cards that won't be covered by the Matrox warranty.

**Mura C4K Series** – The Mura C4K Series operating temperature is 0 to 45 °C. When a Mura C4K Series card is installed in a properly ventilated system, the temperature of the Mura C4K Series card recorded by the Matrox Utility tool or APIs *must never exceed 100 °C*.

To monitor and record the temperature changes of your Mura C4K Series card, open a Telnet session at the Command prompt:  
*Telnet <IP ADDRESS OF CONTROLLER>>capturedevice /allnoedid.*

**Mura IPX Series** – The Mura IPX Series operating temperature is 0 to 45 °C. When a Mura IPX Series card is installed in a properly ventilated system, the temperature of the Mura IPX Series card recorded by the Matrox IPX Utility tool or APIs *must never exceed 100 °C*.

To monitor and record the temperature changes of your Mura IPX Series card, use **Matrox IPX utility tool**. From the Mura CD package, install *Network API SDK.msi*. Then, go to system's *Program Files (x86)\Matrox Graphics Inc\Matrox Network API SDK\Applications* and run the *IPX utility.exe*. From the IPX utility tool window, enter **localhost** to get the temperature of your Mura IPX Series card.

**LUMA Pro Series** – The temperature of your LUMA Pro Series cards should never exceed 90 °C. To retrieve the temperature of your LUMA Pro Series card, use the Matrox PowerDesk software. From the main interface, click **Help and Troubleshooting** → **Troubleshoot**. Under **Chip temperature data and logging**, you can enable options to monitor the peak temperatures and log the chip temperatures of your LUMA Pro Series card.

---

# Power supply sizing for Matrox LUMA Pro Series based systems

When assembling a system based on LUMA Pro Series products, the power supply must be sized to provide power for the entire system, including the CPU, all add-in cards, and any peripherals connected. To determine the power supply size, you must consider not only the power requirements of all devices but also the power rails from which the current is being drawn.

Each power supply provides different voltages with varying current load capacities, depending on system usage. For example, a -12V supply (still used in some systems) supports less than 1A of load, whereas a +12V supply, which bears the brunt of the load in modern systems, can easily exceed 50A capacity in many mid-sized power supplies. The remaining voltages (typically, +3.3V, +5V, and +5VSB) fall between these extremes in terms of current load capacity.

Matrox cards, being PCI Express based, draw power primarily from the +12V supply, though a small amount of current is drawn from the +3.3V supply (typically on the order of 1-2A). Since each Matrox SKU has slightly different power supply requirements, using the largest possible current requirement to size the power supply will ensure the power supply is adequate, regardless of the SKUs installed.

To properly size the power supply, the power requirements of all the devices must be added together separately for each supply rail and then the appropriate power supply selected. For example, the D1480 can consume up to approximately 4.3 A from the +12V supply, while Mura IPX consumes approximately 2A. A system integrating the maximum configuration of 4 D1480 cards and 3 Mura-IPX cards would therefore require up to approximately 23.2 A (or  $4 \times 4.3A + 3 \times 2A$ ) from the +12V supply. Note: This is *in addition* to any pre-existing requirements of the motherboard and installed hardware (CPU, hard disk drives, etc.). For example, if the system configuration requires 15A from the +12V supply with no Matrox cards installed, once the Matrox cards are installed the power supply must be capable of providing  $15A + 23.2A$  (or 39A, rounding up) on the +12V rail for adequate power supply.

A merely “adequate” power supply, however, isn’t sufficient. Most power supplies operate at optimal efficiency at 50-60% of their rated power load. Continually operating beyond this may cause excessive thermal generation and lead to premature aging of the electronic components. It is common practice to ensure that the power supply can supply additional current beyond what’s required for the system configuration in typical use. For maximum efficiency and reliability, make sure to provide a minimum 50% margin on the power supply rating. In the example above, a system requiring 39A on the +12V rail would require approximately 468W. Assuming another 50W for the +3.3V rail and 10W for the +5V rail, the total system requirements are approximately  $468W + 50W + 10W$ , for a total of 528W. A 50% margin on the power supply means specifying a supply of 800W that can supply around 59A on the +12V supply.

Providing less margin than specified above may lead to excess heat generation within the power supply and premature wear-out of electronic components, possibly compromising the overall reliability of the product.



**Note:** The margin provided on the power supply must never be less than 35-40%.

For a common display wall setup that supports up to seven Matrox cards and uses a mid-range Intel CPU, we recommend a minimum power supply of 800W. For larger systems, the power supply must be increased accordingly, taking into account the requirements of the CPU or SHB and backplane/motherboard components.

---

## Shipping an integrated system

While shipping an integrated system, make sure that add-in cards are properly installed in the expansion slots and the board bracket is screwed securely to the chassis. Most systems have a board retaining clip to protect cards from shock and vibration. If your system has a board retaining clip, use it to securely clamp the boards into place. For more information, see the user guide for your system or chassis. Follow the system /chassis manufacturer’s guidelines for proper installation, shipment, and transportation of an integrated system. Failure to do so may cause damage to the cards due to shock and vibration during shipping and transportation.

---

# PCI Express® bandwidth considerations in Matrox LUMA Pro Series and Mura IPX Series based systems

System architecture is an important factor in determining overall capture/display performance with Matrox LUMA Pro Series, Matrox Mura C4K, and Matrox Mura IPX based systems. While the input resolutions and formats must be taken into account, the system bus-level architecture also plays an important role in determining how to optimize the system to obtain the best possible performance. This section attempts to clarify some of the issues that must be considered when implementing Mura-based Display Wall architectures.

## Input source bandwidth requirements

Any capture architecture receives its data from external sources and transfers it to one or more graphic engines for display. The inputs may take many forms: HDMI, Display Port and SDI. Each of these inputs places a different load on the system in terms of quantity of data to be transferred. Each input type is also associated with a default data format HDMI, Display Port and SDI are typically transferred in RGB: 8:8:8, 10:10:10 (24/32 bits per pixel), and in YUV: 4:4:4, 4:2:2, 4:2:0 (8 /10 bits per component). Understanding the different transmission formats and their bandwidth requirements will help guide the integrator in setting up and configuring a Mura-based capture system.

The bandwidth required by any input source can be expressed as follows:

$$BW = Res_x \times Res_y \times fps \times Bytes_{pixel}$$

Where the values *fps* and *Bytes<sub>pixel</sub>* represent the number of frames per second and the number of bytes taken by each pixel, respectively. In HDMI, DP and SDI modes, each pixel requires 3 Bytes for RGB 8:8:8 or YUV 4:4:4 8 bit.

$$BW_{4K} = 3840 \times 2160 \times 60 \times 3 \text{ (4:4:4 8-bit packed)} = 1,500 \text{ MB/s}$$



**Note:** In some cases, it may be possible to capture HDMI, DP or SDI sources and transfer them internally using a 16-bit YUV format. Doing so will reduce the amount of system bandwidth required to transfer the input data; however, it will generally also degrade the capture quality (since less data is used to represent each pixel). This option should be used only when necessary and with sources when the quality of input capture can be sacrificed.

Regardless of the resolutions and formats of the various inputs, the available system bandwidth should not be exceeded. Doing so will result in reduced system performance and/or instability.

## PCI Express architecture overview

To understand how system architecture plays a role in the available bandwidth, a basic understanding of the PCI-Express architecture is helpful. This section describes very briefly, and in general terms, the PCI-Express architecture with the goal of providing some background.

PCI-Express is a point-to-point serial transmission interface using high-speed differential signaling to enable high-performance transfer of data within systems. The PCI-Express architecture is currently in its fifth generation, with each generation providing increased performance over its predecessor. The following table summarizes the peak data transfer capabilities of the PCI-Express architecture based on generation and link width (the link width is the “size” of the electrical connection between two PCI-Express devices). Generally speaking, bus efficiency is anywhere in between 70% and 90% of this peak bandwidth.

The PCI Express specification also defines backward-compatibility between PCI Express devices. That is, a device designed for Gen-3 PCI Express functions at Gen-2 speeds when connected to a Gen-2 device, a Gen-2 device functions at Gen-1 speeds when connected to a Gen-1 device, and so on.

Link width*	PCIe Gen-1	PCIe Gen-2	PCIe Gen-3	PCIe Gen-4	PCIe Gen-5
×1	250 MB/s	500 MB/s	1 GB/s	2 GB/s	4 GB/s
×4	1 GB/s	2 GB/s	4 GB/s	8 GB/s	16 GB/s
×8	2 GB/s	4 GB/s	8 GB/s	16 GB/s	32 GB/s
×16	4 GB/s	8 GB/s	16 GB/s	32 GB/s	64 GB/s

\* The link width provides a measure of the data transfer capabilities of the link in a single direction. Since each PCI Express lane contains both an upstream and a downstream link, the effective bandwidth is doubled. The numbers in this table represent the maximum bandwidth available *in each direction*.

For maximizing data transfer capabilities within a system, it is desirable to have the widest lane widths possible throughout the system. An ideal system for Display Wall applications provides all add-in boards with x16 PCI-Express Gen3 links or x8 PCI-Express Gen4 links, maximizing throughput at each communication link.



## General bandwidth guidelines

It is virtually impossible to provide general guidelines for the installation of Mura cards in a PCIe-based system as there are many different motherboards, and each client's Display Wall implementation is unique. Knowledge of the system architecture and the number and types of inputs is required to optimally place capture cards in the system. By carefully calculating the required bandwidth and ensuring that no data bottlenecks are present at any point in the system, the integrator can guarantee the optimal functioning of the Mura-based Display Wall.

## A word about system architecture and performance

One factor that should be considered when using Matrox LUMA Pro Series, Mura C4K, and Mura IPX is that to improve performance, transfers are performed using system memory, rather than peer-to-peer transfers. In other words, transferring graphical or video data from a capture card to a display source involves first transferring the data to system memory and then from system memory to the display adapter. This is done to address performance limitations imposed by the combination of capture and graphics cards.

Prior to Luma based controllers, the systems used for Mura-based Display Walls were based on a switched architecture (that is, the PCI-Express connectors are connected to PCI-Express switches that form the fabric, or backbone, of the system architecture) to provide multiple PCIe slots for add-in cards. However, the most recent motherboards no longer use switch-based architecture but rather use lane-based architecture that is connected directly to the CPU's to provide multiple PCIe slots. For example, shown below is the block diagram of the Intel Xeon W-3400/2400 platform with Intel W790 chipset. The Intel Xeon W-3400/2400 based platforms have 112/64 PCIe lanes available directly from the CPU. Using lane-based architecture provides sufficient bandwidth without any bottlenecks from the chipset, optimal performance, and reduce latency for graphics intense applications. Knowledge of the capabilities of the motherboard is essential to properly configure the system to maximize the overall performance.:

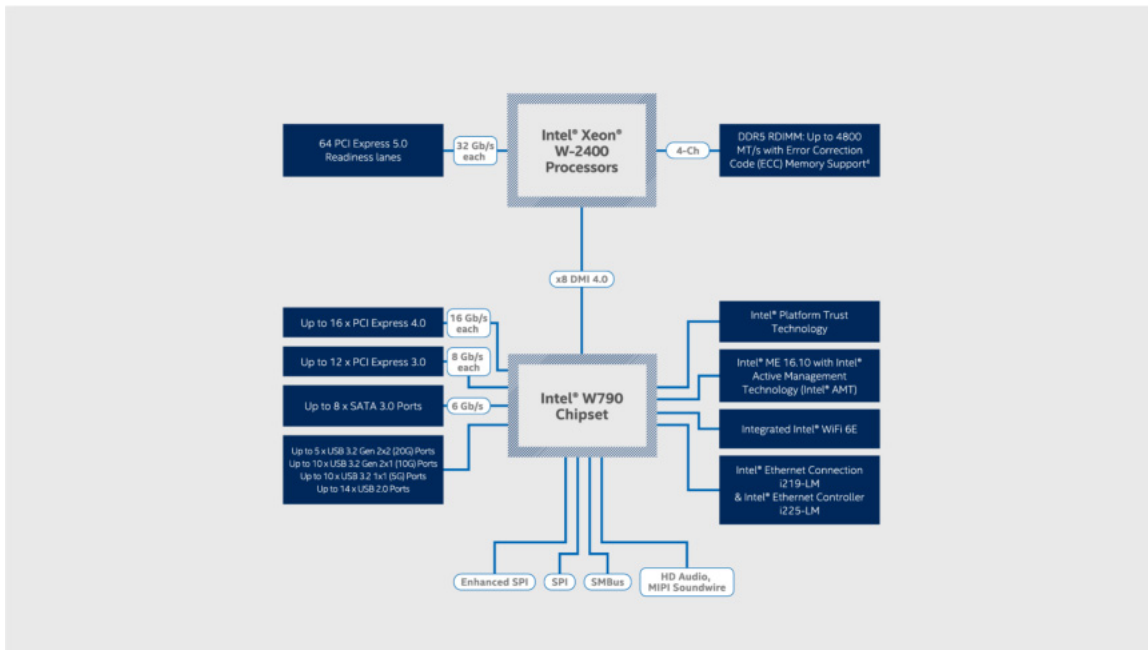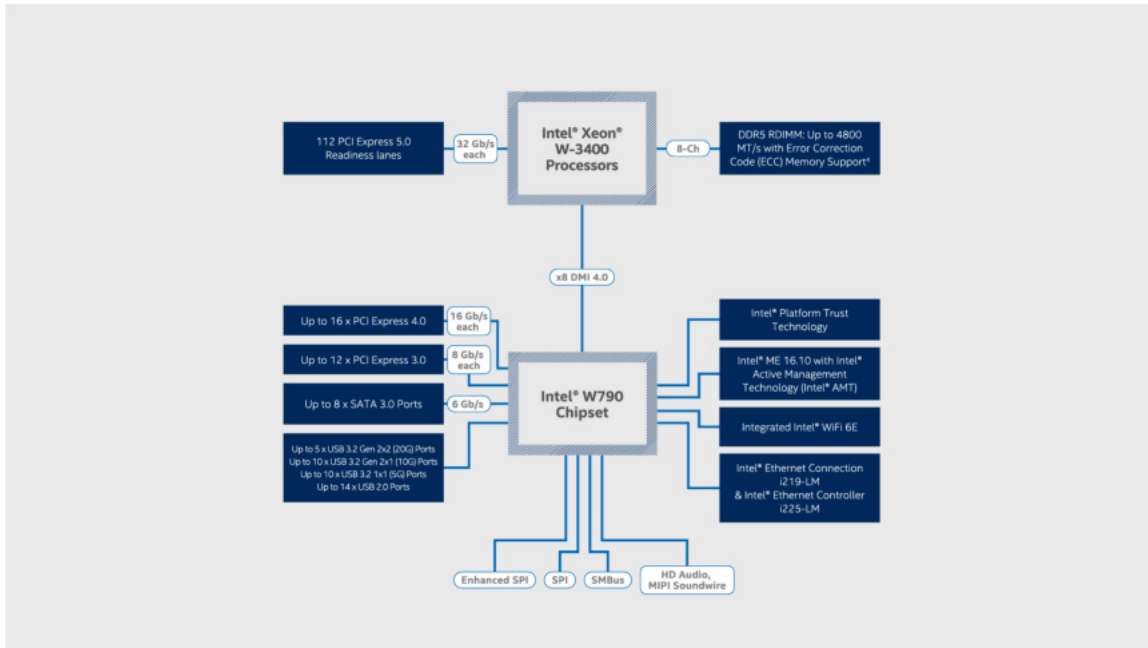

Source: [Intel.com](https://www.intel.com)

---

## Contact us

The Matrox Video Web site has product literature, press releases, technical material, a sales office list, trade show information, and other relevant material. Visit us at [video.matrox.com](https://video.matrox.com).

If you have any questions or comments about our products or solutions, contact us at <https://video.matrox.com/en/forms/contact/general>.

You can get technical assistance by contacting Matrox Video technical support at [dwcsupport@matrox.com](mailto:dwcsupport@matrox.com).

---

# Disclaimer

Information in this document may contain technical inaccuracies or typographical errors. Information may be changed or updated without notice. Matrox reserves the right to make improvements and/or changes in the products, programs and/or specifications described in this information at any time without notice. All trademarks and trade names, service marks and logos referenced herein belong to their respective owners.

ASUS Trademark is either a US registered trademark or trademark of Asustek Computer Inc. in the United States and/or other countries. Reference to any ASUS products, services, processes, or other information and/or use of ASUS Trademarks does not constitute or imply endorsement, sponsorship, or recommendation thereof by ASUS.

Dell and Precision are trademarks or registered trademarks of Dell Inc.

DisplayPort is a trademark of VESA.

HDMI is a registered trademark of HDMI Licensing, LLC in the United States and/or other countries.

HP is a registered trademark of the Hewlett-Packard Development Company, L.P. in the U.S. and other countries.

Intel, Core, and Xeon are trademarks or registered trademarks of Intel Corporation in the U.S. and/or other countries.

Linux is a registered trademark of Linus Torvald in the United States and in other countries.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

NVIDIA is a registered trademark of NVIDIA Corporation.

OpenCL is a trademark of Apple Inc.

OpenGL is a trademark or registered trademark of Silicon Graphics, Inc. in the United States and/or other countries worldwide.

PCIe and PCI Express are registered trademarks and/or service marks of PCI-SIG.

Copyright © 2025 Matrox is a registered trademark of Matrox Graphics Inc. All rights reserved.

**Matrox Graphics Inc.**

1055 Saint Regis Boulevard  
Dorval, Quebec, Canada H9P 2T4  
(514) 822-6000

[video@matrox.com](mailto:video@matrox.com)  
<https://video.matrox.com>

