

# matrox ATC-RG Series

family of external graphics units

Specialty Graphics




Matrox Remote Graphics Unit

### Extending your multi-display possibilities

Matrox Graphics, the industry leader in delivering graphics solutions for professionals for over 30 years, is pleased to introduce the revolutionary Matrox ATC-RG series. A new line of external graphics units designed to keep the computing system in the computer room while bringing the high graphics performance in the operations room.

This system consist of one host interface card and the remote graphics unit (RGU). The interface card connects into the application computer. The RGU is located at the operators desk and allows to connect up to 4 displays, a keyboard, a mouse and sound devices (micro, speakers, headset). It offers also extra USB connection for any USB device that the operator would want to connect. The RGU and the interface board are linked by a fiber optic cable that can be up to 250 meter long (820 feet).

The dual-link version allows to connect a 2K x 2K monitor and an auxiliary monitor with resolution up to 1920 x 1200. This auxiliary monitor can be driven in landscape or partrait mode.

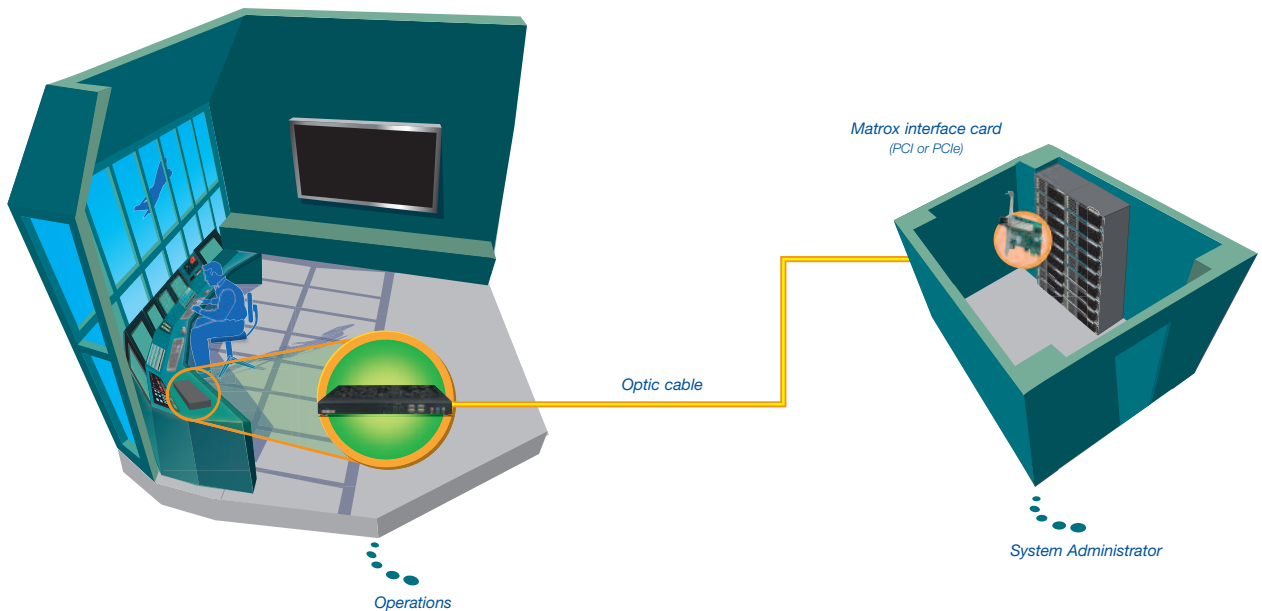


## Matrox ATC-RG series characteristics

Front  
height: 1.15"  
2.7cm



Top  
width: 11.8"  
30cm  
height: 5.6"  
14.5cm

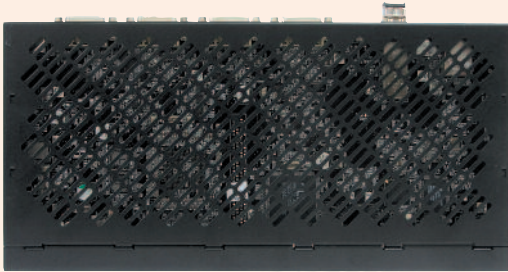


Back



Cable & Connector



Interface Card



PCI



PCIe

## Remote Graphics unit

### Version

#### Outputs

#### Supported resolutions

#### OS Supported

### Dual link 2Kx2K

2 x Dual-Link DVI-I

#### Dual link output:

- 2048 x 2048 Digital
- 2560 x 1600
- Analog Output:**
- Up to 2048 x 2048 analog
- Pivot fonctionnalité

WindowsXP, Linux, Solaris X86, (\*)

### Single link Quad-Head

4 x Single-Link DVI

Up to 1920 x 1200 on each output  
(Analog or digital)

WindowsXP, Linux, Solaris x86 (\*)

### Single link Dual-Head

• 2 x Single-Link DVI

• Up to 1920 x 1200 on each output  
(Analog or digital)

WindowsXP, Linux, Solaris x86 (\*)

\* Contact Matrox for other Operating Systems

### Key features

- 6 USB 2.0 ports for keyboard, mouse, and other USB devices (4 in front and 2 in back)
- 2 stereo-audio line/SPDIF-output connectors (1/8" stereo mini jacks, 1 in front and 1 in back)
- 1 stereo-audio line-input connector (1/8" stereo mini jacks, in front)
- 1 microphone input (1/8" stereo mini jacks, in front)
- Passive cooling (heat sink with no fan) for silent operation, and extra reliability
- PCI and PCI Express (PCIe) fiber-optic interface cards
- Graphics memory: 128 MB
- 1 year warranty

### Interface card

- PCI interface card: 32-bit
- PCIe interface card: PCI Express
- EMC certifications: Class A – ACA, CE, FCC, VCCI

### Fiber-optic cable requirements

(optic cable and cable termination connectors are not included):

- Dual-LC connector type
- Multi-mode compatibility
- 250 meters (820 feet) maximum length with high-bandwidth 50µm/125µm cable

### Contact Matrox

**Montreal Headquarters:** 1-800-361-4903 (North America), 514-822-6364 (Worldwide) | [video@matrox.com](mailto:video@matrox.com)

**London Office:** +44 (1895) 827300

Serving: United Kingdom, Ireland, Benelux, France, Spain, Portugal, Middle East, Africa

**Munich Office:** +49 89 62170-444

Serving: Germany, Austria, Switzerland, Denmark, Finland, Norway, Sweden, Central and Eastern Europe, the Baltic States, Greece, Turkey, Italy

Matrox reserves the right to change specifications without notice. All trademarks and trade names, service marks and logos referenced herein belong to their respective companies.