# Matrox® **Display Wall**

Mura<sup>™</sup> C4K Series • Mura<sup>™</sup> IPX Series • LUMA Pro Series<sup>™</sup>

System Builder's Guide

20349-101-0105 2025.10.28



# **Contents**

Product overview	4
Hardware summary – Mura IPX Series	4
MURAIPXI-E4SF/MURAIPXI-E4SHF	4
MURAIPXI-E2MF/MURAIPXI-E2MHF	5
MURAIPXI-D2MF/MURAIPXI-D2MHF	6
MURAIPXI-E4JF/MURAIPXI-E4JHF	7
MURAIPXI-D4JF/MURAIPXI-D4JHF	8
Hardware summary – Matrox LUMA Pro Series	9
Matrox LUMA Pro A380 Octal	10
Matrox LUMA Pro A380 Quad	11
Matrox LUMA Pro A310 Quad	12
Hardware summary – Mura C4K Series	13
Matrox Mura C4K	13
Matrox Mura C4KH	14
Why choose a validated platform?	15
Platforms validated by Matrox	
Validated systems	
Validated motherboards	
Validated chassis	
LUMA Pro Series system requirements	16
Validated systems	17
Before you begin	
LUMA Pro Series based video wall system	17
Notes and Limitations with Matrox LUMA Pro Series and Mura C4K Series based systems	17
Mura C4K with LUMA Pro Quad Series	17
Mura C4K with LUMA Pro A380 Octal	18
Currently supported systems	18
Dell Precision T5860 Workstation	19
Dell Precision T7960 Workstation	21
HP Z8 G5 Workstation	23
Shuttle XH510G2	25
Supermicro SYS 531A-I	26
Supermicro SYS-540A-TR	28
Supermicro SYS-551A-T	30
Validated motherboards	32
Currently supported motherboards	32
ASUS Pro WS W790-ACE	33
ASUS Pro WS W790E-SAGE SE	35
ASUS WS C422 SAGE/10G	37
Gigabyte MW53-HP0	39
Gigabyte MW83-RP0	41
MSI MEG Z790 ACE	43
MSI MEG Z790 ACE MAX	45
Supermicro X12SPA-TF	47

Supermicro X13SWA-TF	49
Validated chassis	
Currently supported chassis	51
Chenbro RM41300 FS81	51
Rosewill RSV-L4000U	
Supermicro CSE-747BTS-R2K20BP chassis	
Chenbro RM42300-F1U3	52
System ventilation	53
Power supply sizing for Matrox LUMA Pro Series based systems	
Shipping an integrated system	54
PCI Express® bandwidth considerations in Matrox LUMA Pro Series and Mul	ra IPX Series based systems 55
Input source bandwidth requirements	55
PCI Express architecture overview	55
General bandwidth guidelines	56
A word about system architecture and performance	56
Contact us	58
Disclaimer	59

# **Product overview**

Mura IPX Series products are PCIe ×8 Gen 2.0 cards that provide high-density capture, encode, and decode functionality to enhance video walls and operator workstations with advanced video processing and networking capabilities.

#### **Hardware summary - Mura IPX Series**

The Matrox Mura IPX Decode and IPX Encode/Decode Series of products include the following key features:

- Multi-channel 4K/HD/SD encode and decode over standard IP
- DisplayPort<sup>™</sup>, SDI, and HDMI® capture, IP encode, and IP decode support on a single card
- Flexible stream and record capabilities anywhere on the network
- Separate on-board network interface controller for zero impact on the system
- RGB 10:10:10 and 8:8:8 plus YUV 4:4:4, 4:2:2, and 4:2:0 color space support
- Ideal for control rooms, operation centers, board rooms and other mission critical environments as well as digital signage and presentation systems.

#### **MURAIPXI-E4SF/MURAIPXI-E4SHF**





	MURAIPXI-E4SF	MURAIPXI-E4SHF
Part number	MURAIPXI-E4SF	MURAIPXI-E4SHF
Card type	PCle ×16 2.0 (×16 mechanical, ×8 electrical)	PCle ×16 2.0 (×16 mechanical, ×8 electrical)
Form factor	ATX	ATX
Connector	4× BNC 1x 100/1000 Base-T RJ45 Ethernet Port	4× BNC 1x 100/1000 Base-T RJ45 Ethernet Port
Memory	8 GB	8 GB
Output support	_	_
Input support	4× SDI + IP	4× SDI + IP
Decode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Encode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Power consumption	Typical: 27.12 W @ 12 V, 6.27 W @ 3.3 V, or 33.39 W Total	Typical: 27.12 W @ 12 V, 6.27 W @ 3.3 V, or 33.39 W Total
Weight	398 g	334 g
Dimensions	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
Regulatory compliance	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

#### **MURAIPXI-E2MF/MURAIPXI-E2MHF**





	MURAIPXI-E2MF	MURAIPXI-E2MHF
Part number	MURAIPXI-E2MF	MURAIPXI-E2MHF
Card type	PCle ×16 2.0 (×16 mechanical, ×8 electrical)	PCle ×16 2.0 (×16 mechanical, ×8 electrical)
Form factor	ATX	ATX
Connector	2× DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port	2× DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port
Memory	8 GB	8 GB
Output support	_	_
Input support	2× DisplayPort 1.2 + IP	2× DisplayPort 1.2 + IP
Decode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Encode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Power consumption	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
Weight	304 g	268 g
Dimensions	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
Regulatory compliance	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

#### **MURAIPXI-D2MF/MURAIPXI-D2MHF**





	MURAIPXI-D2MF	MURAIPXI-D2MHF
Part number	MURAIPXI-D2MF	MURAIPXI-D2MHF
Card type	PCle ×16 2.0 (×16 mechanical, ×8 electrical)	PCle ×16 2.0 (×16 mechanical, ×8 electrical)
Form factor	ATX	ATX
Connector	2× DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port	2× DisplayPort 1.2, 1x 100/1000 Base-T RJ45 Ethernet Port
Memory	8 GB	8 GB
Output support	_	_
Input support	2× DisplayPort 1.2 + IP	2× DisplayPort 1.2 + IP
Decode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Encode support	_	_
Power consumption	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
Weight	304 g	268 g
Dimensions	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
Regulatory compliance	Class B: FCC, CE, RCM, VCCI, ICES-3, CSA, KC	

#### **MURAIPXI-E4JF/MURAIPXI-E4JHF**





	MURAIPXI-E4JF	MURAIPXI-E4JHF
Part number	MURAIPXI-E4JF	MURAIPXI-E4JHF
Card type	PCle ×16 2.0 (×8 2.0 electrically)	PCIe ×16 2.0 (×8 2.0 electrically)
Form factor	ATX	ATX
Connector	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port
Memory	8 GB	8 GB
Output support	_	_
Input support	4× HDMI, IP	4× HDMI, IP
Decode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Encode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Power consumption	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
Weight	312 g	278 g
Dimensions	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
Regulatory compliance	Class A: FCC, CE, RC	CM, ICES-3, CSA, KC

#### **MURAIPXI-D4JF/MURAIPXI-D4JHF**





	MURAIPXI-D4JF	MURAIPXI-D4JHF
Part number	MURAIPXI-D4JF	MURAIPXI-D4JHF
Card type	PCle ×16 2.0 (×8 2.0 electrically)	PCIe ×16 2.0 (×8 2.0 electrically)
Form factor	ATX	ATX
Connector	4x Mini HDMI (Type C), 1× 100/1000 Base-T RJ45 Ethernet Port	4x Mini HDMI (Type C), 1x 100/1000 Base-T RJ45 Ethernet Port
Memory	8 GB	8 GB
Output support	_	_
Input support	4× HDMI, IP	4× HDMI, IP
Decode support	Multi-channel 4K H.264	Multi-channel 4K H.264
Encode support	_	_
Power consumption	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total	Typical: 24.6 W @ 12 V, 6.105 W @ 3.3 V, or 30.705 W Total
Weight	304 g	268 g
Dimensions	L: 9.02 in / W: 0.75 in / H: 4.38 in L: 22.91 cm / W: 1.91 cm / H: 11.13 cm	
Regulatory compliance	Class A: FCC, CE, RCM, ICES-3, CSA, KC	

### **Hardware summary - Matrox LUMA Pro Series**

The Matrox LUMA Pro Series family of products includes the following key features:

- Matrox LUMA Pro A380 Quad or A310 Quad Pair up to four (4) cards for up to 16x synchronized 2x 8K @60Hz/5K @120Hz or 4x 5K @ 60Hz HDR 12b outputs
- Matrox LUMA Pro A380 Octal Drive a single (1) card for up to 8 x synchronized 8x 5K @ 60Hz HDR 12b outputs
- Support for an over-the-top ribbon synchronization cable (no need for additional synchronization card)
- Matrox LUMA Pro A380 Quad or A310 Quad PCIe 4.0 x16 (x8 electrical) bus interface for higher bandwidth capabilities
- Matrox LUMA Pro A380 Octal PCIe 4.0 x16 (mechanical and electrical) bus interface for higher bandwidth capabilities
- HDCP compliant when used with Matrox Mura IPX HDMI Capture Series cards (as of Mura 4.03.00 driver version)
- HDCP compliant when used with Matrox Mura C4K Capture Series cards (as of Mura 4.06.00 driver version)
- Multi-channel H.264/H.265 IP stream decoding using built-in GPU advanced media codec engine
- Matrox LUMA Pro A380 Octal Eight Mini DisplayPort 2.0 outputs, each with a maximum resolution of 8x 5K@ 60Hz HDR 12b
- Matrox LUMA Pro A380 Quad Four DisplayPort 2.0 outputs, each with a maximum resolution of 2x 8K @60Hz/5K @120Hz or 4x 5K @ 60Hz HDR 12b
- Matrox LUMA Pro A310 Quad Four Mini DisplayPort 2.0 outputs, each with a maximum resolution of 2x 8K @60Hz/5K @120Hz or 4x 5K @ 60Hz HDR 12b
- Microsoft® DirectX 12.0 support enables latest professional applications
- Ideal for control rooms, operation centers, board rooms, and other critical environments as well as digital signage and presentation systems

#### **Matrox LUMA Pro A380 Octal**



	Matrox LUMA Pro A380 Octal
Part number	LUMA-A380P8
Card type	PCle 4.0 x16 (x16 mechanical and electrical)
Form factor	ATX, Full length, single slot
Connector	8 x Mini DisplayPort 1 Auxiliary power connector*
Memory	12 GB
Output support	8
Input support	_
Decode support	Multi-channel H.264 (up to 4K) and H.265 (up to 8K)
Encode support	_
Power consumption	130 W Total
Weight	800 g
Dimensions†	L: 10.86 in / W: 0.771 in / H: 4.97 in L: 27.58 cm / W: 1.958 cm / H: 12.62 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC, UKCA

<sup>\*</sup> Must be connected to an auxiliary power source for the board to function. † Length and height dimensions are with fansink and bracket.


#### **Matrox LUMA Pro A380 Quad**



	Matrox LUMA Pro A380 Quad
Part number	LUMA-A380P
Card type	PCIe 4.0 x16 (x8 electrical)
Form factor	Full Height
Connector	4 x DisplayPort
Memory	6 GB GDDR6
Output support	4
Input support	_
Decode support	Multi-channel H.264 (up to 4K) and H.265 (up to 8K)
Encode support	_
Power consumption	75 W Total
Weight	547 g
Dimensions*	L: 9.99 in / W: 0.737 in / H: 4.99 in L: 25.38 cm / W: 1.872 cm / H: 12.68 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC, UKCA, CSA

 $<sup>^{\</sup>star}\,$  Length and height dimensions are with fansink and bracket.

#### **Matrox LUMA Pro A310 Quad**



	Matrox LUMA Pro A310 Quad
Part number	LUMA-A310FP
Card type	PCIe 4.0 x16 (x8 electrical)
Form factor	Low profile
Connector	4 x Mini DisplayPort
Memory	4 GB GDDR6
Output support	4
Input support	_
Decode support	Multi-channel H.264 (up to 4K) and H.265 (up to 8K)
Encode support	_
Power consumption	50 W Total
Weight	179 g
Dimensions*	L: 6.6 in / W: 0.737 in / H: 2.7 in L: 16.76 cm / W: 1.872 cm / H: 6.86 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC, UKCA, CSA

<sup>\*</sup> Length and height dimensions are with fansink and bracket.

# **Hardware summary - Mura C4K Series**

The Matrox Mura C4K Series includes the following key features:

- Quad HDMI capture up to 4 x 4Kp60 per card
- PCIe x8 Gen 3.0 (x16 mechanical, x8 electrical) fan and fanless design
- Capture HDCP v1.4/v2.3 sources when paired with Matrox LUMA Pro Series\*
- Ideal for control rooms, digital signage, AV presentation and other applications that require high-density HDMI streams

Note: \* Supported with Mura 4.06 driver or later.

#### **Matrox Mura C4K**



	Matrox Mura C4K
Part number	MURA-C4K
Card type	PCIe ×16 3.0 (×16 mechanical, ×8 electrical)
Form factor	ATX, half length, single slot
Connector	4 x HDMI
Memory	2 GB
Output support	_
Input support	4 x HDMI 2.1
Power consumption	29.8 W Typical, 32 W Max
Weight	264 g
Dimensions	L: 5.953 in / W: 0.75 in / H: 4.724 in L: 15.120 cm / W: 1.91 cm / H: 12.615 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC

#### **Matrox Mura C4KH**



	Matrox Mura C4KH
Part number	MURA-C4KH
Card type	PCIe ×16 3.0 (×16 mechanical, ×8 electrical)
Form factor	ATX, half length, single slot
Connector	4 x HDMI
Memory	2 GB
Output support	<del>-</del>
Input support	4 x HDMI 2.1
Power consumption	29.8 W Typical, 32 W Max
Weight	298 g
Dimensions	L: 5.953 in / W: 0.75 in / H: 4.724 in L: 15.120 cm / W: 1.91 cm / H: 12.615 cm
Regulatory compliance	Class A: CE, FCC, ICES-3, RCM, KC

# Why choose a validated platform?

Matrox display wall products are designed for control rooms, operation centers, and other critical environments that require stable, reliable, and durable solutions. Matrox display wall products work in numerous non-validated, commercial-off-the-shelf (COTS) motherboards and systems, but only a select few of these off-the-shelf solutions can be thoroughly tested, verified, and validated by Matrox. Choosing a validated platform guarantees a high-quality solution to drive your display wall system.

Some of the key benefits of using a Matrox-validated platform include:

- Optimized performance Carefully selected by Matrox to ensure better performance, a validated platform guarantees that your display wall product will work at or close to optimum performance.
- Extensive validation process Systems are put to the test by Matrox Engineering, QA, Sales, and Marketing departments. From development and testing to sales and product demos, our employees use these systems in various practices to monitor performance. Using a validated platform guarantees the same level of performance experienced by Matrox staff.
- Easier deployment Using an already validated system takes the guesswork out of building a display wall system. Integrators can use a validated platform to quickly and easily deploy solutions across a wide range of project sizes.
- Faster customer support Customer support is faster, easier, and more precise because our technical support team is already familiar with the validated system you're using.
- Uncompromized compatibility Using a validated platform ensures that your display wall product has been thoroughly tested
  and verified for uncompromized compatibility.
- Improved reliability Systems validated by Matrox have guaranteed thermal and ventilation characteristics, resulting in better product longevity.

#### **Platforms validated by Matrox**

Matrox is constantly reviewing new systems and looking to validate new platforms across multiple price points. Any system suggestions are welcome. The following tables are summaries of the active list.

#### Validated systems

Validated System	Maximum number of boards supported per system
Dell Precision T5860 Workstation	4
Dell Precision T7960 Workstation	8
HP Z8 G5 Workstation	6
Shuttle XH510G2	1
Supermicro SYS 531A-I	4
Supermicro SYS-540A-TR	7
Supermicro SYS-551A-T	6

#### Validated motherboards

Validated motherboard	Maximum number of boards supported per system
ASUS Pro WS W790-ACE	5
ASUS Pro WS W790E-SAGE SE	7
ASUS WS C422 SAGE/10G	7
Gigabyte MW53-HP0	5
Gigabyte MW83-RP0	7

Validated motherboard	Maximum number of boards supported per system
MSI MEG Z790 ACE	3
MSI MEG Z790 ACE MAX	3
Supermicro X12SPA-TF	7
Supermicro X13SWA-TF	6

#### Validated chassis

Validated chassis	Currently supported motherboards
Chenbro RM41300 FS81	<ul> <li>ASUS Pro WS W790-ACE</li> <li>ASUS Pro WS W790E-SAGE SE</li> <li>ASUS WS C422 SAGE/10G</li> <li>Gigabyte MW83-RP0</li> <li>MSI MEG Z790 ACE</li> <li>Supermicro X12SPA-TF</li> </ul>
Rosewill RSV-L4000U	<ul> <li>ASUS Pro WS W790-ACE</li> <li>ASUS Pro WS W790E-SAGE SE</li> <li>ASUS WS C422 SAGE/10G</li> <li>Gigabyte MW83-RP0</li> <li>MSI MEG Z790 ACE</li> </ul>
Supermicro CSE-747BTS-R2K20BP chassis	Supermicro X12SPA-TF     Supermicro X13SWA-TF
Chenbro RM42300-F1U3	<ul><li>Gigabyte MW53-HP0</li><li>MSI MEG Z790 ACE</li><li>MSI MEG Z790 ACE MAX</li><li>ASUS Pro WS W790-ACE</li></ul>

### **LUMA Pro Series system requirements**

For LUMA Pro Series based display walls (with or without Mura C4K Series and/or Mura IPX Series cards), the demands and requirements of a system are more generic. To use as a LUMA Pro Series based display wall, a system *must* meet the following requirements:

- The system *must* be properly ventilated and the Mura C4K Series, Mura IPX Series, and LUMA Pro Series cards must not exceed the maximum allowed temperature. For more information, see "System ventilation", page 53.
- Mura C4K Series and Mura IPX Series cards used in a non-validated system *must* have a fansink.
- The system *must* be populated with at least 64 GB of system memory. Follow the system manufacturer's guideline for memory population sequence.



**Note:** We recommend choosing memory from the system or motherboard manufacturer's supported list. The actual memory frequency may differ depending on the CPU types and the memory module used.

# Validated systems

The following systems have been validated by Matrox to work with the Matrox Mura C4K Series, the Matrox Mura IPX Series, and the Matrox LUMA Pro Series products.



Note: Ensure that you have the following default settings to launch the Windows operating system:

- In the system BIOS main page, go to Boot Tab → Boot Mode Select and select UEFI.
- In the system BIOS main page, go to Boot Tab → CSM → Launch CSM and select Disabled.
- 0

Note: Ensure that you have the following default settings:

- In the system BIOS, go to Advanced → PCI Subsystem Settings → Re-Size Bar and select Enabled.
- In the system BIOS, go to Advanced → PCI Subsystem Settings → Above 4G Decoding and select Enabled.

#### Before you begin

To ensure optimal performance, read the following guidelines before installing your Matrox graphics hardware.

#### **LUMA Pro Series based video wall system**

0

Note: Always insert your *LUMA Pro Series* in the *PCIe*®  $3.0/4.0/5.0 \times 16$  or  $\times 8$  slots, your *Mura C4K Series* in the *PCIe*®  $3.0/4.0/5.0 \times 16$  or  $\times 8$  slots, and your *Mura IPX Series* cards in the *PCIe*®  $2.0/3.0/4.0/5.0 \times 16$  or  $\times 8$  slots ( $\times 16$  or  $\times 8$  electrical).

- LUMA Pro Series, Mura C4K Series, and Mura IPX Series Insert these cards in the PCIe ×16 slots that are ×16 /×8 electrical.
- 0

Note: LUMA Pro A380 Quad and LUMA Pro A310 Quad cards require Mura 4.02 driver or later. LUMA Pro A380 Octal cards require Mura 4.05 driver or later. Mura IPX Series cards require 4.03 driver or later. Mura C4K Series cards require 4.06 driver or later.

0

Note: Requires 4.05 or later drivers for Win 11 24H2 LUMA Pro Series controllers.

#### **Supported configurations**

- Up to four (4) LUMA Pro A310 Quad standalone cards or with multiple Mura IPX / Mura C4K Capture Series cards
- Up to four (4) LUMA Pro A380 Quad standalone cards or with multiple Mura IPX / Mura C4K Capture Series cards
- Single LUMA Pro A380 Octal standalone card or with multiple Mura IPX / Mura C4K Capture Series cards

# Notes and Limitations with Matrox LUMA Pro Series and Mura C4K Series based systems

This sections describes the notes and limitations pertaining to the LUMA Pro Series and Mura C4K Series based systems.

#### **Mura C4K with LUMA Pro Quad Series**

The following are notes and limitations of Mura C4K with LUMA Pro Quad Series based systems.

- Performances on the LUMA Pro series when capturing Mura C4K and IPX are limited by the GPU Copy Engine and 3D Engine, and the bus capacity per GPU of the system.
- To capture 4K60 (4:4:4) streams and display on sixteen (16) 4K60 outputs and achieve best performance, following are the requirements:

- System Configuration: 3x Mura C4K cards + 4 x LUMA Pro A380 Quad cards
- 10 GB/s¹ Bus bandwidth required on each LUMA Pro A380 Quad card
- PowerDesk configuration must be in "Stretch" mode
- Display Wall must be started in "Background" mode

#### Mura C4K with LUMA Pro A380 Octal

The following are notes and limitations of Mura C4K with LUMA Pro Octal based systems.

- While installing the LUMA Pro A380 Octal card in the system, use the recommended PCIe slots specified in the "Performance considerations with LUMA Pro series controllers" configuration table of that system.
- LUMA Pro A380 Octal can only receive and display a total of six (6) 4Kp60 captures coming from two (2) Mura C4K cards. Use lower resolutions to capture and display more streams.
- To capture 4K60 (4:4:4) streams and display on six (6) 4K60 outputs and achieve best performance, following are the requirements:
  - System Configuration: 2x Mura C4K cards + 1 x LUMA Pro A380 Octal card
  - 7.5 GB/s² Bus bandwidth per GPU is required on the LUMA Pro A380 Octal card
  - PowerDesk configuration must be in "Stretch" mode
  - Display Wall must be started in "Background" mode

### **Currently supported systems**

The following systems have been validated by Matrox to work with Matrox Mura C4K Series, Matrox Mura IPX Series, and Matrox LUMA Pro Series products.

Validated system	Maximum number of boards supported per system
Dell Precision T5860 Workstation	4
Dell Precision T7960 Workstation	8
HP Z8 G5 Workstation	6
Shuttle XH510G2	1
Supermicro SYS 531A-I	4
Supermicro SYS-540A-TR	7
Supermicro SYS-551A-T	6

<sup>1</sup> Performances on the LUMA Pro series when capturing Mura C4K is limited by the GPU Copy Engine and 3D engine and the bus capacity per GPU of the system. If the bus bandwidth is lower than 10GB/s, we may still be able to capture 4K60 (4:4:4) streams but display only on eight (8) or twelve (12) 4K60 LUMA Pro A380 outputs depending on the configuration

<sup>2</sup> Performances on the LUMA Pro A380 Octal when capturing Mura C4K is limited by the GPU Copy Engine and 3D engine and the bus capacity per GPU of the system. If the bus bandwidth is lower than 7.5GB/s, we may still be able to capture but less than six (6) inputs

#### **Dell Precision T5860 Workstation**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	4
Maximum supported Mura C4K Series	-
Maximum supported Mura IPX Series	-
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Dell Precision T5860
Chipset	Intel® W790
Processor	Intel® Xeon® W5-2455, @ 3.2 GHz CPU
Heatsink (for CPU)	LGA 4677
System BIOS version	1.1.15, 2023-12-09
System memory	64 GB (4 x16 GB, DDR5, 4800 MHz)
Chassis	Mid-size tower
Power supply	750 W
PCIe expansion slots	<ul> <li>1 PCle x16 5.0 slot</li> <li>1 PCle x16 4.0 slot</li> <li>2 PCle x8 4.0 slots</li> <li>1 PCle x8 4.0 slot (x8 mechanical x4 electrical)</li> </ul>
Notes	<ul> <li>Currently supports only standalone LUMA Pro cards in the system.</li> <li>In the system BIOS:         <ul> <li>Go to Advanced → Power → Thermal Management → select Ultra Performance.</li> <li>Go to Advanced → Power → Thermal Management → Lower PCle Slot Zone → select 50.</li> <li>Go to Advanced → Power → ASPM → select Disabled.</li> </ul> </li> <li>In the system BIOS, go to Advanced → Performance → Resizeable Base Address (BAR) → select ON.</li> <li>In the system BIOS:         <ul> <li>Go to Advanced → Update, Recovery → SupportAssist OS Recovery → select OFF.</li> <li>Go to Advanced → Update, Recovery → BIOSConnect → select OFF.</li> <li>Go to Advanced → Update, Recovery → Dell Auto OS Recovery Threshold → select OFF.</li> </ul> </li> <li>In the system BIOS, go to Advanced → SystemManagement → Power-on-Self-Test Automatic Recovery → select OFF.</li> <li>In the system BIOS, go to Advanced → Pre-boot Behavior → Warnings &amp; Errors → select Continue on Warning and Errors.</li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>On-board console supported with 4.02 or later drivers.</li> <li>Third-party controller is unsupported.</li> </ul>

# Configurations

	LUMA Pro Series based controller	
Slot	Main	Option
SLOT1 PCIe5 x16	LUMA-A380P	В
SLOT2 PCIe4 x8	LUMA-A380P	В
SLOT3 PCIe4 x8 (4)	-	-

	LUMA Pro Series based controller	
Slot	Main	Option
SLOT4 PCIe4 x16	LUMA-A380P	В
SLOT5 PCIe4 x8	LUMA-A380P	В

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
SLOT1 PCle5 x16	x16	В	В	В	В
SLOT2 PCIe4 x8	x8	-	-	В	В
SLOT3 PCIe4 x8 (4)	x4	-	-	-	-
SLOT4 PCle4 x16	x16	-	В	В	В
SLOT5 PCIe4 x8	x8	-	-	-	В

Option	Product
Α	-
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

#### **Dell Precision T7960 Workstation**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	8
Maximum supported Mura C4K Series	7
Maximum supported Mura IPX Series	-
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Dell Precision T7960
Chipset	Intel® W790
Processor	Intel® Xeon® W5-3433X CPU @ 2.0 GHz
Heatsink (for CPU)	LGA 4677
System BIOS version	2.7.0, 2024-12-17
System memory	64 GB (4 x16 GB 4800 MHz ECC DDR5 RDIMM)
Chassis	Tower
Power supply	1400 W
PCIe expansion slots	<ul> <li>2 full-height PCle x16 5.0 slots</li> <li>2 full-height PCle x16 4.0 slots</li> <li>2 full-height PCle x8 4.0 slots</li> <li>2 full-height, half-length PCle x8 4.0 slots (x4 electrical)</li> </ul>
Notes	<ul> <li>The system fans' speed must be set to full speed. In the system BIOS:         <ul> <li>Go to Advanced → Power → Thermal Management → select Ultra Performance.</li> <li>Go to Advanced → Power → Lower PCle Slot Zone → select 50.</li> <li>Go to Advanced → Power → CPU/Memory Zone → select 50.</li> <li>Go to Advanced → Power → Upper PCle Slot Zone → select 50.</li> <li>Go to Advanced → Power → Active State Power Management → ASPM → select Disabled.</li> </ul> </li> <li>In the system BIOS, go to Advanced → Performance → PCle Resizable Address Register (BAR) → select Enabled.</li> <li>Ensure to have the Primary Video set to Slot1. In the system BIOS:         <ul> <li>Go to Advanced → Display → Primary Video Slot → change from Auto to Primary card (Slot 1).</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.06 or later drivers for Mura C4K Series support.</li> <li>Third-party controller is unsupported.</li> </ul>

#### Configurations

	LUMA Pro Series based controller	
Slot	Main	Option
SLOT1PCle5x16	LUMA-A380P	В
SLOT2PCle4x8(4)	MURA-C4KH	Α
SLOT3PCle4x8(4)	MURA-C4KH	Α
SLOT4PCle4x16	LUMA-A380P	A, B
SLOT5PCle5x16	LUMA-A380P	A, B
SLOT6PCle4x8	MURA-C4KH	Α

	LUMA Pro Series based controller	
Slot	Main	Option
SLOT7PCle4x8	MURA-C4KH	Α
SLOT8PCle4x16	LUMA-A380P	A, B

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
SLOT1PCle5x16	x16	В	В	В	В
SLOT2PCle4x8(4)	x4*	Α	Α	Α	Α
SLOT3PCle4x8(4)	x4*	Α	Α	Α	Α
SLOT4PCle4x16	x16	Α	В	В	В
SLOT5PCle5x16	x16	Α	Α	В	В
SLOT6PCle4x8	x8	Α	Α	Α	Α
SLOT7PCle4x8	x8	Α	Α	Α	Α
SLOT8PCle4x16	x16	А	Α	Α	В

Note: \* Mura C4K Series performance is reduced by half when installed in PCIe x4 slot.

Option	Product
Α	MURA-C4K or MURA-C4KH
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

#### **HP Z8 G5 Workstation**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	6
Maximum supported Mura C4K Series	-
Maximum supported Mura IPX Series	5
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19045 Build 19045
Motherboard	HP Z8 G5
Chipset	Intel® C741
Processor	Intel® Xeon® Gold 5416S Dual CPU @ 2.0 GHz
Heatsink (for CPU)	LGA 4677
System BIOS version	HP U60 Ver. 01.02.01, 2024-03-07
System memory	64 GB (4 x16 GB 4800 MHz DDR5 RDIMM)
Chassis	Tower
Power supply	1125 W
PCIe expansion slots	<ul> <li>1 PCle x16 5.0 slot</li> <li>2 PCle x16 4.0 slots</li> <li>1 PCle x16 3.0 slot</li> <li>1 PCle x8 3.0 slot</li> <li>2 PCle x4 3.0 slots</li> </ul>
Notes	<ul> <li>Ensure to have the front &amp; rear system fans connected directly to the 4-pin fan connectors on the Motherboard to run at full speed.</li> <li>In the system BIOS go to Advanced → System Options → SATA Controller RAID Mode → deselect.</li> <li>In the system BIOS:         <ul> <li>Go to Advanced → Slot Settings → NVME0 → NVME0 → select Disabled.</li> <li>Go to Advanced → Slot Settings → Personality Slot0 → Personality Slot0 → select Disabled.</li> <li>Go to Advanced → Slot Settings → Personality Slot1 → Personality Slot1 → select Disabled.</li> <li>Go to Advanced → Slot Settings → for every PCle x16 slot → Resizable BARs → select Enabled.</li> </ul> </li> <li>In the system BIOS:         <ul> <li>Go to Advanced → Performance Options → Permormance Control → select High Performance Mode.</li> <li>Go to Advanced → Performance Options → Hyperthreading → select Checked.</li> </ul> </li> <li>In the system BIOS, go to Advanced → Sub-NUMA clustering → Permormance Control → select Enable SNC4 (4-clusters).</li> <li>In the system BIOS, go to Advanced → Workload Configuration → select I/O Focused.</li> <li>In the system BIOS, go to Advanced → Remote Management Options → Intel Management Engin (ME) → deselect.</li> <li>In the system BIOS:</li></ul>

#### Configurations

	LUMA Pro Series based controller	
Slot	Main	Option
Slot 1 - PCle4 x16 CPU0	LUMA-A380P	В
Slot 2 - PCle4 x16 CPU1	LUMA-A380P	A, B
Slot 3 - PCle3 x4 CPU0	MURAIPXI-EAJHF	Α
Slot 4 - PCle5 x16 CPU0	LUMA-A380P	A, B
Slot 5 - PCle3 x8 CPU0	MURAIPXI-E4JHF	Α
Slot 6 - PCle3 x16 CPU1	LUMA-A380P	A, B
Slot 7 - PCIe3 x4 PCH	-	-

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
Slot 1 - PCle4 x16 CPU0	x16	В	В	В	В
Slot 2 - PCle4 x16 CPU1	x16	Α	Α	В	В
Slot 3 - PCle3 x4 CPU0	x4*	А	Α	Α	А
Slot 4 - PCle5 x16 CPU0	x16	Α	В	В	В
Slot 5 - PCle3 x8 CPU0	x8	Α	Α	Α	Α
Slot 6 - PCle3 x16 CPU1	x16	А	Α	Α	В
Slot 7 - PCle3 x4 PCH	x4	-	-	-	-

Note: \* Mura IPX performance in the x4 slot is reduced by half.

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

#### Shuttle XH510G2

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	1
Maximum supported Mura C4K Series	-
Maximum supported Mura IPX Series	-
Maximum supported LUMA Pro A310 Quad / A380 Quad	1 (LUMA-A310FP only)
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Shuttle XH510G2
Chipset	Intel® H510 Express
Processor	Intel® Core™ i5-11500 CPU @ 2.7 GHz
Heatsink (for CPU)	LGA 1200
System BIOS version	1.10 2023-03-08
System memory	16 GB (2 x8 GB 3200 MHz DDR4 SODIMM Non ECC)
Chassis	5L form factor
Power supply	180 W
PCIe expansion slots	1 PCle ×16 4.0 slot
Notes	<ul> <li>Only LUMA-A310FP can fit in this chassis. The LUMA-A380P is not supported with this chassis.</li> <li>Optional riser card (PRC02 kit) required to insert add-in LUMA-A310FP card in the PCle x16 4.0 slot.</li> <li>The chassis fans' speed must be set to full speed. In the system BIOS:         <ul> <li>Go to Advanced → Hardware Health Configuration → Fan1 Speed Control → set to Full Mode.</li> </ul> </li> <li>In the system BIOS, go to Advanced → Onboard Device Configuration → PCleX16 Speed → set to Gen4.</li> <li>PClex16 Gen4 option is only available with 11th Core I CPU family.</li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>On-board console supported with 4.02 or later drivers.</li> <li>Third-party controller is unsupported.</li> </ul>

#### Configurations

	LUMA Pro Series based controller	
Slot	Main	Option
PCI-Ex16	LUMA-A380FP	-

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1
PCI-Ex16	x16	LUMA-310FP

Option	Product
Α	-
В	LUMA-A310FP

# **Supermicro SYS 531A-I**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	4
Maximum supported Mura C4K Series	3
Maximum supported Mura IPX Series	3
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	2*
Validated OS	Windows 11 Enterprise LTSC; Version 10.0.026100 Build 26100
Motherboard	Supermicro X13SRA-TF
Chipset	Intel® W790
Processor	Intel® Xeon® W3-2425 CPU @ 3.0 GHz
Heatsink (for CPU)	LGA 4677 (Part# SNK-P0090AP4)
System BIOS version	2.2a, 2025-03-28
System memory	64 GB (4 x16GB 4800MHz ECC DDR5 RDIMM)
Chassis	Supermicro CSE-735D4-1K26B
Power supply	1200 W
PCIe expansion slots	3 PCle ×16 5.0 slots     1 PCle x4 4.0 slot
Notes	<ul> <li>In the system BIOS go to Advanced → PCIe/PCI/PnP Configuration → Re-Size BAR → select Enabled.</li> <li>In the system BIOS go to Advanced → PCIe/PCI/PnP Configuration → VGA priority → select Offboard.</li> <li>In the Windows device manager, ensure to disable the onboard graphics.</li> <li>Ensure to have the following default setting for ASPM. In the system BIOS:         <ul> <li>Go to Advanced → Chipset Configuration&gt; North Bridge → II) Configuration → PCIe ASPM Support (global) → select Disabled.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series.</li> <li>Require 4.06 or later drivers for Mura C4K Series support.</li> <li>Optional TPM 2.0 module is required for Windows 11.</li> <li>Third-party controller is unsupported.</li> <li>When installing multiple GPU cards, follow the manufacturer's recommendation to connect the 24-pin ATX power connector and both 8-pin power connectors (JPW2 and JPW3) to the power supply</li> </ul>

 $<sup>^{\</sup>star}$  LUMA Pro A380 Octal single card is supported with Mura 4.05 driver. Two cards will be supported with a future driver.

#### Configurations

	LUMA Pro Series based controller		
Slot	Main Option		
CPUSLOT1PCIe4.0X4	MURA-C4KH	A, B	
CPUSLOT2PCIe5.0X16	LUMA-A380P	A, B	
CPUSLOT4PCle5.0X16	MURA-C4KH	A, B	
CPUSLOT6PCIe5.0X16	LUMA-A380P	В	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCle4.0X4	x4	Α	В	Α	Α
CPUSLOT2PCle5.0X16	x16	Α	Α	В	В
CPUSLOT4PCle5.0X16*	x16	А	А	Α	В
CPUSLOT6PCle5.0X16*	x16	В	В	В	В

#### Performance considerations with LUMA Pro A380 Octal controller

Slot	Connectivity	Configuration 1
CPUSLOT1PCIe4.0X4	x4	Α
CPUSLOT2PCle5.0X16	x16	Α
CPUSLOT4PCle5.0X16*	x16	Α
CPUSLOT6PCle5.0X16*	x16	С

Note: \* While using LUMA Pro A380 Octal, install in CPUSLOT4PCIe5.0x16 or CPUSLOT6PCIe5.0X16.

Option	Product
A	Mura C4K or Mura IPX Series Options for Mura C4K Series: MURA-C4K or MURA-C4KH. Options for Mura IPX Series: MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-E4JF, Or MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

#### **Motherboard layout**



#### **Supermicro SYS-540A-TR**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	7
Maximum supported Mura C4K Series	6
Maximum supported Mura IPX Series	6
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Supermicro X12SPA-TF
Chipset	Intel® C621A
Processor	Intel® Xeon® W-3323 CPU @ 3.5 GHz
Heatsink (for CPU)	LGA 4189
System BIOS version	1.9, 2024-01-04
System memory	64 GB (8 x8 GB 2400 MHz DDR4 DIMM)
Chassis	Supermicro CSE-747BTS-R2K20BP
Power supply	2200 W
PCIe expansion slots	4 PCle x16 4.0 slots  3 PCle x8 4.0 slots (in x16 slots)
Notes	<ul> <li>The chassis fans' speed must be set to Heavy I/O in IPMI.</li> <li>Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, disable the four M.2 slots. In the system BIOS:         <ul> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M.2-CO1 → select Disabled.</li> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M.2-CO2 → select Disabled.</li> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M.2-CO3 → select Disabled.</li> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M.2-CO4 → select Disabled.</li> </ul> </li> <li>In the system BIOS go to Advanced → PCIe/PCI/PnP Configuration → VGA Priority → select Offboard.</li> <li>In the Windows device manager, ensure to disable the onboard graphics.</li> <li>Ensure to have the following default settings for Above 4G Decoding. In the system BIOS:         <ul> <li>Go to Advanced → PCIe/PCI/PnP Configuration → Above 4G Decoding → select Enabled.</li> </ul> </li> <li>In the system BIOS, go to Advanced → PCIe/PCI/PnP Configuration → Re-Size Bar → select Enabled.</li> <li>In the system BIOS, go to Advanced → ACPI Settings → WHEA Support → select Disabled.</li> <li>In the system BIOS, go to Advanced → Chipset Configuration&gt; North Bridge → II) Configuration → PCIe ASPM</li> </ul>
	Support (global) → select Disabled.

Require 4.02 or later drivers for LUMA Pro Series controllers.
 Require 4.03 or later drivers for Mura IPX Series controllers.
 Require 4.06 or later drivers for Mura C4K Series support.

#### **Configurations**

	LUMA Pro Series based controller	
Slot	Main	Option
CPUSLOT1PCle4.0X16	LUMA-A380P	В
CPUSLOT2PCle4.0X8(inx16)	MURA-C4KH	Α
CPUSLOT3PCle4.0X16	LUMA-A380P	A, B

• Third-party controller is unsupported.

	LUMA Pro Series based controller		
Slot	Main Option		
CPUSLOT4PCle4.0X8(inx16)	MURA-C4KH	Α	
CPUSLOT5PCle4.0X16	LUMA-A380P	A, B	
CPUSLOT6PCle4.0X8(inx16)	MURA-C4KH	Α	
CPUSLOT7PCle4.0X16	LUMA-A380P	A, B	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCle4.0X16	x16*	В	В	В	В
CPUSLOT2PCle4.0X8(inx16)	x8/x0	Α	Α	Α	Α
CPUSLOT3PCle4.0X16	x16/x8	А	Α	В	В
CPUSLOT4PCle4.0X8(inx16)	x8/x0	Α	Α	Α	Α
CPUSLOT5PCle4.0X16	x16/x8	А	В	В	В
CPUSLOT6PCle4.0X8(inx16)	x8/x0	Α	Α	Α	Α
CPUSLOT7PCle4.0X16	x16/x8	Α	Α	Α	В

Note: \* Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, ensure to disable the four M.2 slots in the system BIOS. Shared slots are 2 & 3, 4 & 5, and 6 & 7.

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MF, MURAIPXI-D2MF, MURAIPXI-D4JF, MURAIPXI-D4JF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

#### **Motherboard layout**



#### **Supermicro SYS-551A-T**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	6
Maximum supported Mura C4K Series	5
Maximum supported Mura IPX Series	5
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Supermicro X13SWA-TF
Chipset	Intel® W790
Processor	Intel® Xeon® W5-3423 CPU @ 2.1 GHz
Heatsink (for CPU)	LGA 4677 (Part# SNK-P0091AP4)
System BIOS version	2.1b, 2024-05-28
System memory	128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM)
Chassis	Supermicro CSE-GS7A-2000B
Power supply	2000 W
PCIe expansion slots	6 PCle ×16 5.0 slots
Notes	<ul> <li>Ensure to order the air-cooled configuration for the chassis.</li> <li>One 120 mm x 120 mm x 25 mm 6.4 KRPM optional fan (Part#: FAN-0222L4) must be ordered for the rear fan separately for air-cooled configuration when ordering the system.</li> <li>Two 120 mm x 120 mm x 25 mm 59 CFM front fans that come with the system must be replaced with two 120 mm x 120 mm x 25 mm 150 CFM fans.</li> <li>The chassis fans' speed must be set to Heavy I/O in IPMI.</li> <li>In the system BIOS go to Advanced → PCIe/PCI/PnP Configuration → VGA Priority → select Offboard.</li> <li>In the Windows device manager, ensure to disable the onboard graphics.</li> <li>Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul> <li>Go to Advanced → PCIe/PCI/PnP Configuration → Above 4G Decoding → select Enabled.</li> </ul> </li> <li>In the system BIOS, go to Advanced → PCIe/PCI/PnP Configuration → Re-Size Bar → select Enabled.</li> <li>In the system BIOS: <ul> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M2-C01 OPROM → select Disabled.</li> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M2-C02 OPROM → select Disabled.</li> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M2-C03 OPROM → select Disabled.</li> <li>Go to Advanced → PCIe/PCI/PnP Configuration → M2-C04 OPROM → select Disabled.</li> </ul> </li> <li>Ensure to have the following settings for ASPM. In the system BIOS: <ul> <li>Go to Advanced → Chipset Configuration → North Bridge → II) Configuration → PCIe ASPM Support (global) → select Disabled.</li> </ul> </li> <li>Require 4.02 or later drivers for Mura IPX Series support.</li> <li>Require 4.03 or later drivers for Mura IPX Series support.</li> <li>Require 4.06 or later drivers for Mura C4K Series support.</li> <li>Third-party controller is unsupported.</li> <li>Optional rack-mount kit mounting rails are available (Supermicro Part#: MCP-290-00057-0B).</li> </ul>

# Configurations

	LUMA Pro Series based controller		
Slot	Main	Option	
CPUSLOT1PCle5.0X16	LUMA-A380P	A, B	
SLOT2 (no connector)	-	-	
CPUSLOT3PCle5.0X16	LUMA-A380P	A, B	
CPUSLOT4PCle5.0X16	MURA-C4KH	Α	
CPUSLOT5PCle5.0X16	LUMA-A380P	A, B	
CPUSLOT6PCle5.0X16	MURA-C4KH	Α	
CPUSLOT7PCle5.0X16	LUMA-A380P	В	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCle5.0X16	x16	А	Α	Α	В
SLOT2	No connector	-	-	-	-
CPUSLOT3PCle5.0X16	x16	А	Α	В	В
CPUSLOT4PCle5.0X16	x16	А	Α	Α	А
CPUSLOT5PCle5.0X16	x16	Α	В	В	В
CPUSLOT6PCle5.0X16	x16	А	А	Α	А
CPUSLOT7PCle5.0X16	x16	В	В	В	В

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MHF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JHF, or MURAIPXI-E4JHF)
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

# **Motherboard layout**



# **Validated motherboards**

The following motherboards have been validated by Matrox to work with Matrox Mura C4K Series, Matrox Mura IPX Series, Matrox LUMA A380P, and Matrox LUMA A310FP products.



Note: Ensure to have the following default settings to launch the Windows operating system:

- In the system BIOS main page, go to Boot Tab → Boot Mode Select → and select UEFI.
- In the system BIOS main page, go to **Boot Tab**  $\rightarrow$  **CSM**  $\rightarrow$  **Launch CSM** and select **Disabled**.
- 0

**Note:** The motherboard *must* be populated with at least 64 GB of system memory. Follow the system or motherboard manufacturer's guideline for memory population sequence.

- We recommend choosing memory from the system or motherboard manufacturer's supported list. The actual memory frequency may differ depending on the CPU types and the memory module used.
- 0

Note: Ensure that you have the following default settings:

- In the system BIOS, go to Advanced → PCI Subsystem Settings → Re-Size Bar and select Enabled.
- In the system BIOS, go to Advanced → PCI Subsystem Settings → Above 4G Decoding and select Enabled.

#### **Currently supported motherboards**

The following validated motherboards are currently supported.

Validated motherboard	Maximum number of boards supported per system
ASUS Pro WS W790-ACE	5
ASUS Pro WS W790E-SAGE SE	7
ASUS WS C422 SAGE/10G	7
Gigabyte MW53-HP0	5
Gigabyte MW83-RP0	7
MSI MEG Z790 ACE	3
MSI MEG Z790 ACE MAX	3
Supermicro X12SPA-TF	7
Supermicro X13SWA-TF	6

#### **ASUS Pro WS W790-ACE**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	5
Maximum supported Mura C4K Series	4
Maximum supported Mura IPX Series	4
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Asus Pro WS W790-ACE
Chipset	Intel® W790
Processor	Intel® Xeon® W7-2495X CPU @ 2.5 GHz or Intel® Xeon® W5-2465X CPU @ 3.10 GHz
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)
System BIOS version	1502
System memory	64 GB (4 x 16 GB 4800 MHz ECC DDR5 RDIMM)
Chassis	Chenbro RM41300-FS81
Power supply	850 W (Part#: EVGA SUPERNOVA 850 GT)
PCIe expansion slots	5 PCle ×16 5.0 slots (supports x16, x16, x16, x0/x8, x16/x8 modes)
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>Only the front chassis fan that comes with the Chenbro chassis must be changed to: <ul> <li>120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>The chassis fans must run at full speed.</li> <li>The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>Ensure to have the following default settings in the system BIOS: <ul> <li>Go to Advanced → PCI Subsystem Settings → Above 4G Decoding → select Enabled.</li> <li>Go to Advanced → PCI Subsystem Settings → Re-Size Bar → select Enabled.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX series.</li> <li>Require 4.06 or later drivers for Mura C4K series.</li> <li>Third-party controller is unsupported.</li> <li>Check the Windows Device Manager to ensure all chipset drivers are installed.</li> </ul>

#### Configurations

	LUMA Pro Series based controller		
Slot	Main	Option	
PCIEx16_1(x16)	LUMA-A380P	В	
PCIEx16_2(x16)	MURA-C4KH	A, B	
PCIEx16_3(x16)	LUMA-A380P	A, B	
PCIEx16_4(x0/x8)	MURA-C4KH	Α	
PCIEx16_5(x16/x8)	MURA-C4KH	A, B	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIEx16_1(x16)	x16	В	В	В	В
PCIEx16_2(x16)	x16	Α	А	В	В
PCIEx16_3(x16)	x16	Α	В	В	В
PCIEx16_4(x0/x8)	x0/x8	Α	А	Α	А
PCIEx16_5(x16/x8)	x16/x8	Α	Α	Α	В

Option	Product
A	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JHF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

# **Motherboard layout**



#### **ASUS Pro WS W790E-SAGE SE**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	7
Maximum supported Mura C4K Series	6
Maximum supported Mura IPX Series	6
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044
Motherboard	Asus Pro WS W790E-SAGE SE
Chipset	Intel® W790
Processor	■ Intel® Xeon® W5-3425 CPU @ 3.2 GHz or ■ Intel® Xeon® W3-2435 CPU @ 3.1 GHz
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)
System BIOS version	1502, 2024-08-30
System memory	<ul> <li>128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM) or</li> <li>64 GB (4 x16 GB 4800 MHz ECC DDR5 RDIMM)*</li> </ul>
Chassis	Rosewill RSV-L4000U 4U
Power supply	1200 W (Enermax Revolution D.F.2 1200 W; Part#: ERS1200EWT)
PCIe expansion slots	<ul> <li>7 PCIe ×16 5.0 slots (with Intel® Xeon® W5-3425 CPU) or</li> <li>4 PCIe ×16 5.0 slots (Intel® Xeon® W3-2435 CPU)**</li> </ul>
Notes	<ul> <li>Power supply isn't included with the chassis.</li> <li>The middle chassis fans inside the Rosewill chassis must be changed to: <ul> <li>3x 120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>You must disable onboard VGA. Ensure to have the VGA_SW switch disabled on the motherboard to completely disable onboard VGA.</li> <li>Ensure to have the following default settings for Above 4G Decoding. In the system BIOS: <ul> <li>Go to Advanced → PCI Subsystem Settings → Above 4G Decoding → select Enabled.</li> <li>Go to Advanced → PCI Subsystem Settings → Resize bar support → select Enabled.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series support.</li> <li>Require 4.06 or later drivers for Mura C4K Series support.</li> <li>Third-party controller is unsupported.</li> <li>* When populated with Intel® Xeon® W-2400 Series processors, memory slots DIMM_C1, DIMM_DIM_G1, and DIMM_H1 are not supported.</li> <li>** When populated with Intel® Xeon® W-2400 Series processors, slots PCIEX16(G5)_2, PCIEX16(G5)_4, and PCIEX16(G5)_6 are not supported.</li> </ul>

#### Configurations

	LUMA Pro Series based controller		
Slot	Main	Option	
PCIEX16(G5)_1	LUMA-A380P	В	
PCIEX16(G5)_2	MURA-C4KH	Α	
PCIEX16(G5)_3	LUMA-A380P	A, B	
PCIEX16(G5)_4	MURA-C4KH	Α	

	LUMA Pro Series based controller		
Slot	Main	Option	
PCIEX16(G5)_5	LUMA-A380P	A, B	
PCIEX16(G5)_6	MURA-C4KH	Α	
PCIEX16(G5)_7	LUMA-A380P	A, B	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIEX16(G5)_1	x16	В	В	В	В
PCIEX16(G5)_2*	x16	А	Α	Α	Α
PCIEX16(G5)_3	x16	A	А	В	В
PCIEX16(G5)_4*	x16	А	А	Α	Α
PCIEX16(G5)_5	x16	А	В	В	В
PCIEX16(G5)_6*	x8	А	А	Α	Α
PCIEX16(G5)_7	x16	А	А	А	В

Note: \* When populated with Intel® Xeon® W-2400 Series processors, slots  $PCIEX16(G5)_2$ ,  $PCIEX16(G5)_4$ , and  $PCIEX16(G5)_6$  are not supported.

Option	Product
Α	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MHF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JHF, or MURAIPXI-E4JHF)
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8

#### **Motherboard layout**



#### **ASUS WS C422 SAGE/10G**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	7
Maximum supported Mura C4K Series	-
Maximum supported Mura IPX Series	6
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 10 Enterprise; Version 10.0.19045 Build 19045
Motherboard	Asus WS C422 SAGE/10G
Chipset	Intel® C422
Processor	Intel® Xeon® W-2123 CPU @ 3.6 GHz
Heatsink (for CPU)	LGA2066
System BIOS version	4101, 2023-08-25
System memory	64 GB (8 x 8 GB 2666 MHz ECC DDR4 RDIMM)
Chassis	Chenbro RM41300-FS81
Power supply	750 W (Part#: Corsair RM750X)
PCIe expansion slots	7 PCIe ×16 3.0 slots (×16 mechanical, ×16/x8 electrical)
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>Only the front chassis fan that comes with the Chenbro chassis must be changed to: <ul> <li>120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>The chassis fans must run at full speed.</li> <li>The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>Ensure to have the following settings. In the system BIOS: <ul> <li>Go to Advanced → Boot CSM → select Disabled.</li> <li>Go to Advanced → Platform Misc Configuration → ASPM → select Disabled.</li> <li>Go to Advanced → PCI Subsystem Settings → Above 4G Decoding → select Enabled.</li> <li>Go to Advanced → PCI Subsystem Settings → Re-Size Bar → select AUTO.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series controllers.</li> <li>Third-party controller is unsupported.</li> <li>Check the Windows Device Manager to ensure all chipset drivers are installed.</li> </ul>

#### **Configurations**

	LUMA Pro Series based controller	
Slot	Main	Option
PCIEx16_1	LUMA-A380P	В
PCIEx16_2	MURAIPXI-E4JHF	Α
PCIEx16_3	LUMA-A380P	A, B
PCIEx16_4	MURAIPXI-E4JHF	Α
PCIEx16_5	LUMA-A380P	A, B
PCIEx16_6	MURAIPXI-E4JHF	Α
PCIEx16_7	LUMA-A380P	A, B

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIEx16_1	x16	В	В	В	В
PCIEx16_2	x4/x8	Α	Α	Α	Α
PCIEx16_3	x16/x8	А	А	B*	B*
PCIEx16_4	x0/x8	А	Α	Α	Α
PCIEx16_5	x16/x8	Α	B*	B*	B*
PCIEx16_6	x0/x8	А	А	Α	А
PCIEx16_7	x16/x8	Α	Α	Α	B*

Note: \* The GPU bandwidth is reduced to 6 GB/s instead of 12 GB/s when shared slots are used. Shared slots are 2 & 3, 4 & 5 and 6 & 7.

Option	Product
Α	MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



### Gigabyte MW53-HP0

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	5
Maximum supported Mura C4K Series	4
Maximum supported Mura IPX Series	4
Maximum supported LUMA Pro A310 Quad / A380 Quad	4
Maximum supported LUMA Pro A380 Octal	-
Validated OS	Windows 11 Enterprise LTSC; Version 10.0.26100 Build 26100
Motherboard	Gigabyte MW53-HP0
Chipset	Intel® W790
Processor	Intel® Xeon® W5-2465 CPU @ 3.1 GHz
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)
System BIOS version	R09, 2025-04-08
System memory	64 GB (4 x16 GB 4800 MHz ECC DDR5 RDIMM)
Chassis	Chenbro RM42300-F1U3
Power supply	750 W (EVGA Supernova 750 G5; Part#: EVGA 220-G5-0750-X1)
PCIe expansion slots	4 PCle ×16 5.0 slots 1PCle ×4 3.0 slot
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>The front chassis fan that comes with the Chenbro chassis must be changed to         <ul> <li>120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>The chassis fan setting must be at the default.</li> <li>Ensure to have the following setting. In the system BIOS:         <ul> <li>Go to Advanced → PCI Subsystem Settings → Re-Size Bar Setting → select ENABLED.</li> </ul> </li> <li>Ensure to have the following settings. In the system BIOS:         <ul> <li>Go to Chipset → Miscellaneous Configuration → ACTIVE VIDEO → select Onboard Device.</li> <li>Go to Chipset → Power Policy → Power Policy Quick Settings → select BEST PERFORMANCE.</li> </ul> </li> <li>Require 4.03 or later drivers for Mura IPX Series controllers.</li> <li>Require 4.06 or later drivers for Mura C4K Series controllers.</li> <li>Third-party controller is unsupported.</li> <li>On-board console supported with 4.02 or later drivers.</li> </ul>

#### Configurations

	LUMA Pro Series based	LUMA Pro Series based controller	
Slot	Main	Option	
PCIE_2(G3x4)	LUMA-A380P	Α	
PCIE_4(G5x16)	MURA-C4KH	A, B	
PCIE_5(G5x16)	LUMA-A380P	A, B	
PCIE_6(G5x16)	MURA-C4KH	A, B	
PCIE_7(G5x16) near CPU	LUMA-A380P	В	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIE_2(G3x4	x4	Α	А	Α	А
PCIE_4(G5x16)	x16	Α	Α	В	В
PCIE_5(G5x16)	x16	A	В	В	В
PCIE_6(G5x16)	x16	А	Α	Α	В
PCIE_7(G5x16)	x16	В	В	В	В

Option	Product
Α	Mura C4K or Mura IPX Series Options for Mura C4K: MURA-C4K or MURA-C4KH Options for Mura IPX: MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MF, MURAIPXI-E4JHF, MURAIPXI-E4JHF, MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



#### **Gigabyte MW83-RP0**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards	7	
supported		
Maximum supported Mura C4K Series	6	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro A310 Quad / A380 Quad	4	
Maximum supported LUMA Pro A380 Octal		
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044	
Motherboard	Gigabyte MW83-RP0	
Chipset	Intel® W790	
Processor	Intel® Xeon® W7-3465 CPU @ 2.5 GHz or Intel® Xeon® W3-2435 CPU @ 3.1 GHz	
Heatsink (for CPU)	LGA 4677 (Part#: Noctua NH-D9 DX-4677 4U)	
System BIOS version	F12, 2024-04-08	
System memory	128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM) or 64 GB (4 x16 GB 4800 MHz ECC DDR5 RDIMM)*	
Chassis	Chenbro RM41300-FS81	
Power supply	850 W (EVGA Supernova 850 G5; Part#: 220-G5-0850-X1)	
PCle expansion slots	7 PCle ×16 5.0 slots	
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>Only the front chassis fan that comes with the Chenbro chassis must be changed to <ul> <li>120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>The chassis fans must run at full speed.</li> <li>The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>Ensure to have the following setting. In the system BIOS: <ul> <li>Go to Default Bios Settings → Fan setting → select DC MODE.</li> </ul> </li> <li>Ensure to have the following setting. In the system BIOS: <ul> <li>Go to Advanced → PCI Subsystem Settings → Re-Size Bar → select AUTO.</li> </ul> </li> <li>Ensure to have the following settings. In the system BIOS: <ul> <li>Go to Chipset → Miscellaneous Configuration → ACTIVE VIDEO → select PCI DEVICE.</li> <li>Go to Chipset → Miscellaneous Configuration → Decode IO decode for Second GPU → select Enabled.</li> <li>Go to Chipset → Advanced Power Management Configuration → CPU C State Control → Enhance Halt State(C1E) → select Disable.</li> </ul> </li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series controllers.</li> <li>Require 4.06 or later drivers for Mura C4K Series controllers.</li> <li>Third-party controller is unsupported.</li> <li>On-board console supported with 4.02 or later drivers.</li> <li>When populated with Intel® Xeon® W-2400 Series processors, only 4 DIMMs are supported. When installing memory modules, make sure to begin with the first socket of each channel, such as DIMM_P0_A0, DIMM_P0_B0, DIMM_P0_C0, and DIMM_P0_D0.</li> <li>When populated with Intel® Xeon® W-2400 Series processors, slots PCIE_4(G5x16), PCIE_5(G5x16), and PCIE_6(G5x16) are not supported.</li> <li>Optional W-2400 (E1B) carrier (P/N: 12KRC-0I4677-12R) must be ordered for Intel® Xeon® W-2400 Series processors.</li> </ul>	

### Configurations

	LUMA Pro Series based controller	
Slot	Main	Option
PCIE_1(G5x16)	LUMA-A380P	A, B
PCIE_2(G5x16)	MURA-C4KH	Α
PCIE_3(G5x16)	LUMA-A380P	A, B
PCIE_4(G5x16)	MURA-C4KH	Α
PCIE_5(G5x16)	LUMA-A380P	A, B
PCIE_6(G5x16)	MURA-C4KH	Α
PCIE_7(G5x16)	LUMA-A380P	В

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
PCIE_1(G5x16)	x16	Α	Α	Α	В
PCIE_2(G5x16)	x16	Α	Α	Α	Α
PCIE_3(G5x16)	x16	Α	В	В	В
PCIE_4(G5x16)	x16	Α	Α	Α	Α
PCIE_5(G5x16)	x16	Α	А	В	В
PCIE_6(G5x16)	x16	Α	А	Α	Α
PCIE_7(G5x16)	x16	В	В	В	В

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E4JF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



#### **MSI MEG Z790 ACE**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	3
Maximum supported Mura C4K Series	2
Maximum supported Mura IPX Series	2
Maximum supported LUMA Pro A310 Quad / A380 Quad	2
Maximum supported LUMA Pro A380 Octal	2*
Validated OS	Windows 11 Enterprise; Version 10.0.26100 Build 26100
Motherboard	MSI MEG Z790 ACE
Chipset	Intel® Z790
Processor	Intel® Core™ i9-13900K CPU @ 3.0 GHz
Heatsink (for CPU)	LGA 1700 (Part#: Noctua NH-L12S)
System BIOS version	1.E0 (2025-04-17)
System memory	64 GB (4 x16 GB 5600 MHz Non ECC DDR5 UDIMM)
Chassis	Chenbro RM41300-FS81
Power supply	850 W (Part#: EVGA Supernova 850 P6 or 850 GT)
PCIe expansion slots	<ul> <li>1 PCle 5.0 slot ×16 mechanical and electrical</li> <li>1 PCle 5.0 slot x16 mechanical x8 electrical</li> <li>1 PCle 4.0 slot x16 mechanical x4 electrical</li> </ul>
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>Only the front chassis fan that comes with the Chenbro chassis must be changed to         <ul> <li>120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>The chassis fans' speed must be set to full speed.</li> <li>The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>Ensure to have the following settings. In the system BIOS:         <ul> <li>Go to Advanced → PCIe/PCI Subsystem Settings → Re-Size Bar Support → select Enabled.</li> <li>Go to Advanced → PCIe/PCI Subsystem Settings → PCIe Native Power Management → select Disabled.</li> </ul> </li> <li>In the system BIOS:         <ul> <li>Go to Advanced → PCIe/PCI Subsystem Settings → Integrated Graphics Configuration → Initiate Graphics Adapter → PEG → select Enabled.</li> <li>Go to Advanced → PCIe/PCI Subsystem Settings → Integrated Graphics Configuration → IGD Multi-Monitor → select Disabled.</li> </ul> </li> <li>M2_4 slot will be unavailable when PCI_E2 slot is populated.</li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series controllers.</li> <li>Require 4.06 or later drivers for Mura C4K Series controllers.</li> <li>Third-party controller is unsupported.</li> <li>On-board console is supported with 4.02 or later drivers.</li> </ul>

 $<sup>^{\</sup>star}$  LUMA Pro A380 Octal single card is supported starting with Mura 4.05 driver. Two cards will be supported with a future driver.

#### **Configurations**

	LUMA Pro Series based controller	
Slot	Main	Options
PCI_E1x16 (x16/x8)*	LUMA-A380P	В
PCI_E2x16 (x8)	MURA-C4KH	A, B
PCI_E3x16 (x4)	MURA-C4KH	Α

Note: \* PCI\_E1 slot will run at x8 speed when PCI\_E2 slot is populated.

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2
PCI_E1x16 (x16/x8)*	x16/x8	В	В
PCI_E2x16 (x8)	x8	Α	В
PCI_E3x16 (x4)	x4	А	Α

#### Performance considerations with LUMA Pro A380 Octal controller

Slot	Connectivity	Configuration 1
PCI_E1x16 (x16/x8)*	x16/x8	С
PCI_E2x16 (x8)	x8	Α
PCI_E3x16 (x4)	x4	А

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



#### **MSI MEG Z790 ACE MAX**

	LUMA Pro Series based controllers	Third-party based controllers
Validated	Yes	No

Maximum number of cards supported	3
Maximum supported Mura C4K Series	2
Maximum supported Mura IPX Series	2
Maximum supported LUMA Pro A310 Quad / A380 Quad	2
Maximum supported LUMA Pro A380 Octal	2*
Validated OS	Windows 11 Enterprise; Version 10.0.26100 Build 26100
Motherboard	MSI MEG Z790 ACE MAX
Chipset	Intel® Z790
Processor	Intel® Core™ i9-13900K CPU @ 3.0 GHz
Heatsink (for CPU)	LGA 1700 (Part#: Noctua NH-L12S)
System BIOS version	A.7
System memory	64 GB (4 x16 GB 5600 MHz Non ECC DDR5 UDIMM)
Chassis	Chenbro RM41300-FS81
Power supply	850 W (Part#: EVGA Supernova 850 P6 or 850 GT)
PCIe expansion slots	<ul> <li>1 PCle 5.0 slot ×16 mechanical and electrical</li> <li>1 PCle 5.0 slot x16 mechanical x8 electrical</li> <li>1 PCle 4.0 slot x16 mechanical x4 electrical</li> </ul>
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply isn't included with the chassis.</li> <li>Only the front chassis fan that comes with the Chenbro chassis must be changed to         <ul> <li>120 mm x 120 mm x 25 mm 120 CFM.</li> </ul> </li> <li>The chassis fans' speed must be set to full speed.</li> <li>The dust protection filter in the front door must be removed for proper system ventilation.</li> <li>Ensure to have the following settings. In the system BIOS, go to Advanced → PCle/PCI Subsystem Settings:         <ul> <li>Re-Size Bar Support → select Enabled.</li> <li>PCle Native Power Management → select Disabled.</li> <li>Above 4G Memory → select Enabled.</li> </ul> </li> <li>In the system BIOS:         <ul> <li>Go to Advanced → PCle/PCI Subsystem Settings → Integrated Graphics Configuration → Initiate Graphics Adapter → select PEG.</li> <li>Go to Advanced → PCle/PCI Subsystem Settings → Integrated Graphics Configuration → IGD Multi-Monitor → select Enabled.</li> <li>In Windows Control Panel, go to Power Options → Preferred Plans → select Ultimate Performance.</li> <li>In Windows Control Panel, go to System → Advanced System Settings → Advanced → Performance Setting → select Adjust for best performance.</li> <li>M02_4 slot will be unavailable when PCI_E2 slot is populated.</li> <li>Require 4.02 or later drivers for LUMA Pro Series controllers.</li> <li>Require 4.03 or later drivers for Mura IPX Series.</li> <li>Require 4.06 or later drivers for Mura C4K Series.</li> <li>Third-party controller is unsupported.</li> <li>On-board console is supported with 4.02 or later drivers.</li> </ul> </li> </ul>

 $<sup>^{\</sup>star}$  LUMA Pro A380 Octal single card is supported starting with Mura 4.05 driver. Two cards will be supported with a future driver.

#### **Configurations**

	LUMA Pro Series based controller	
Slot	Main	Options
PCI_E1x16 (x16/x8)*	LUMA-A380P	В
PCI_E2x16 (x8)	MURA-C4KH	A, B
PCI_E3x16 (x4)	MURA-C4KH	Α

Note: \* PCI\_E1 slot will run at x8 speed when PCI\_E2 slot is populated.

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2
PCI_E1x16 (x16/x8)*	x16/x8	В	В
PCI_E2x16 (x8)	x8	Α	В
PCI_E3x16 (x4)	x4	Α	А

#### Performance considerations with LUMA Pro A380 Octal controller

Slot	Connectivity	Configuration 1	
PCI_E1x16 (x16/x8)*	x16/x8	С	
PCI_E2x16 (x8)	x8	Α	
PCI_E3x16 (x4)	x4	А	

Option	Product
Α	Mura C4K or Mura IPX Series Options for Mura C4K: MURA-C4K or MURA-C4KH Options for Mura IPX: MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MF, MURAIPXI-E4JHF, MURAIPXI-E4JHF, MURAIPXI-E4JHF
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



#### **Supermicro X12SPA-TF**

Validated	Yes	No
Maximum number of cards supported	7	
Maximum supported Mura C4K Series	6	
Maximum supported Mura IPX Series	6	
Maximum supported LUMA Pro A310 Quad / A380 Quad	4	

Maximum supported LUMA Pro A380 Octal

Validated OS Windows 10 Enterprise LTSC; Version 10.0.19044 Build 19044

**LUMA Pro Series based controllers** 

Motherboard Supermicro X12SPA-TF

Chipset Intel® C621A

Processor Intel® Xeon® W-3323 CPU @ 3.5 GHz

Heatsink (for CPU) LGA 4189

**System BIOS version** 1.9, 2024-01-04

System memory 64 GB (8 x8 GB 2400 MHz DDR4 DIMM)

Chassis Supermicro CSE-747BTS-R2K20BP

Power supply 2200 W

PCle expansion slots ■ 4 PCle ×16 4.0 slot

3 PCle x8 4.0 slots (in x16)

Notes

- The chassis fans' speed must be set to Heavy I/O mode in IPMI.
- Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, disable the four M.2 slots. In the system BIOS:

Third-party based controllers

- Go to Advanced → PCle/PCl/PnP Configuration → M.2-CO1 → select Disabled.
- Go to Advanced → PCIe/PCI/PnP Configuration → M.2-CO2 → select Disabled.
- Go to Advanced → PCIe/PCI/PnP Configuration → M.2-CO3 → select Disabled.
- Go to Advanced → PCle/PCI/PnP Configuration → M.2-CO4 → select Disabled.
- In the system BIOS, go to Advanced → PCIe/PCI/PnP Configuration → VGA Priority → select Offboard.
- In the Windows device manager, ensure to disable the onboard graphics.
- Ensure to have the following default settings for Above 4G Decoding. In the system BIOS:
- $\blacksquare \ \, \text{In the system BIOS, go to Advanced} \to \textbf{PCle/PCI/PnP Configuration} \to \textbf{Re-Size Bar} \to \textbf{select Enabled}. \\$
- In the system BIOS, go to Advanced  $\rightarrow$  ACPI Settings  $\rightarrow$  WHEA Support  $\rightarrow$  select Disabled.
- In the system BIOS, go to Advanced → Chipset Configuration --> North Bridge → II) Configuration → PCle ASPM Support (global) → select Disabled.
- Require 4.02 or later drivers for LUMA Pro Series controllers.
- Require 4.03 or later drivers for Mura IPX Series controllers.
- Require 4.06 or later drivers for Mura C4K Series support.
- Third-party controller is unsupported.

#### **Configurations**

	LUMA Pro Series based controller		
Slot	Main Options		
CPUSLOT1PCle4.0X16	LUMA-A380P	В	
CPUSLOT2PCle4.0X8(inx16	MURA-C4KH	Α	
CPUSLOT3PCle4.0X16	LUMA-A380P	A, B	

	LUMA Pro Series based controller		
Slot	Main Options		
CPUSLOT4PCle4.0X8(inx16)	MURA-C4KH	Α	
CPUSLOT5PCle4.0X16	LUMA-A380P	A, B	
CPUSLOT6PCle4.0X8(inx16)	MURA-C4KH	Α	
CPUSLOT7PCIe4.0X16	LUMA-A380P	A, B	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCle4.0X16	x16*	В	В	В	В
CPUSLOT2PCle4.0X8(inx16	x8/x0	Α	Α	Α	Α
CPUSLOT3PCle4.0X16	x16/x8	Α	Α	В	В
CPUSLOT4PCle4.0X8(inx16)	x8/x0	Α	Α	Α	Α
CPUSLOT5PCle4.0X16	x16/x8	А	В	В	В
CPUSLOT6PCle4.0X8(inx16)	x8/x0	Α	Α	Α	А
CPUSLOT7PCle4.0X16	x16/x8	Α	Α	Α	В

Note: \* Slot1 is shared with four M.2 slots. For Slot1 to perform at x16 electrical, ensure to disable the four M.2 slots in the system BIOS. Shared slots are 2 & 3, 4 & 5 and 6 & 7.

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



#### **Supermicro X13SWA-TF**

Validated	Yes	No
Maximum number of cards supported	6	
Maximum supported Mura C4K Series	5	
Maximum supported Mura IPX Series	5	
Maximum supported LUMA Pro A310 Quad / A380 Quad	4	
Maximum supported LUMA Pro A380 Octal	-	
Validated OS	Windows 10 Enterprise LTSC; Version 10.0.19044	Build 19044
Motherboard	Supermicro X13SWA-TF	
Chipset	Intel® W790	
Processor	Intel® Xeon® W5-3423 CPU @ 2.1 GHz	
Heatsink (for CPU)	LGA 4677 (Part#: SNK-P0091AP4)	
System BIOS version	2.1b, 2024-05-28	
System memory	128 GB (8 x16 GB 4800 MHz ECC DDR5 RDIMM)	
Chassis	Supermicro CSE-747BTS-R2K20BP	
Power supply	2200 W	
PCle expansion slots	6 PCle ×16 5.0 slots	
Notes	The chassis fans' speed must be set to Heavy I/O     In the system BIOS, go to Advanced → PCIe/PCI/Pr     In the Windows device manager, ensure to disable the Ensure to have the following default settings for	nP Configuration → VGA Priority → select Offboard.  ble the onboard graphics.  Above 4G Decoding. In the system BIOS:  → Above 4G Decoding → select Enabled.  nP Configuration → Re-Size Bar → select Enabled.  → M.2-CO1 OPROM → select Disabled.  → M.2-CO2 OPROM → select Disabled.  → M.2-CO3 OPROM → select Disabled.  → M.2-CO4 OPROM → select Disabled.

Third-party based controllers

**LUMA Pro Series based controllers** 

#### **Configurations**

	LUMA Pro Series based controller		
Slot	Main Options		
CPUSLOT1PCIe5.0X16	LUMA-A380P	A, B	
SLOT2 (no connector)	-	-	
CPUSLOT3PCIe5.0X16	LUMA-A380P	A, B	
CPUSLOT4PCIe5.0X16	MURA-C4KH	Α	

select Disabled.

• Third-party controller is unsupported.

Require 4.02 or later drivers for LUMA Pro Series controllers.
 Require 4.03 or later drivers for Mura IPX Series support.
 Require 4.06 or later drivers for Mura C4K Series support.

• Optional rack-mount kit mounting rails are available (Supermicro part#: MCP-290-00059-0B).

	LUMA Pro Series based controller		
Slot	Main Options		
CPUSLOT5PCle5.0X16	LUMA-A380P	A, B	
CPUSLOT6PCle5.0X16	MURAIPXI-E4JHF	Α	
CPUSLOT7PCle5.0X16	LUMA-A380P	В	

#### Performance considerations with LUMA Pro Quad Series controller

Slot	Connectivity	Configuration 1	Configuration 2	Configuration 3	Configuration 4
CPUSLOT1PCIe5.0X16	x16	Α	Α	Α	В
SLOT2	No connector	-	-	-	-
CPUSLOT3PCIe5.0X16	x16	A	Α	В	В
CPUSLOT4PCIe5.0X16	x16	Α	Α	Α	Α
CPUSLOT5PCIe5.0X16	x16	А	В	В	В
CPUSLOT6PCIe5.0X16	x16	Α	Α	Α	А
CPUSLOT7PCIe5.0X16	x16	В	В	В	В

Option	Product
A	Mura C4K Series (MURA-C4K or MURA-C4KH) or Mura IPX Series (MURAIPXI-E4SF, MURAIPXI-E4SHF, MURAIPXI-D2MF, MURAIPXI-D2MHF, MURAIPXI-E2MHF, MURAIPXI-D4JF, MURAIPXI-D4JHF, MURAIPXI-E4JF, or MURAIPXI-E4JHF)
В	LUMA-A310FP or LUMA-A380P
С	LUMA-A380P8



# Validated chassis

The following chassis have been validated by Matrox to work with Matrox Mura C4K Series, Matrox Mura IPX Series, Matrox LUMA Pro Series products.

## **Currently supported chassis**

#### Chenbro RM41300 FS81

Cards supported (maximum)	7*			
Part number	RM41300-FS81 (includes chassis and fans. Power supply is not included.)			
Power supply	750 W (Part#: Corsair RM750X / Part#: EVGA SuperNOVA 750 G3) 850 W (Part#: EVGA Supernova 850 G3 or 850 P6 or 850 GT) 1200 W (Enermax Revolution D.F.2 1200 W; Part#: ERS1200EWT) 1200 W (SAMA P1200 Platinum)			
Power supply bracket	Standard			
Fan	<ul> <li>One 120 mm x 120 mm x 25 mm 85.5 CFM front fan (included with the chassis)</li> <li>Two 80 mm x 80 mm x 25 mm 39 CFM rear fans (included with the chassis)</li> <li>Two 120 mm x 120 mm x 25 mm 85.5 CFM fans on the lid (included with the chassis)</li> </ul>			
Supported motherboards	<ul> <li>ASUS Pro WS W790-ACE</li> <li>ASUS Pro WS W790E-SAGE SE</li> <li>ASUS WS C422 SAGE/10G</li> <li>Gigabyte MW83-RP0</li> <li>MSI MEG Z790 ACE</li> <li>Supermicro X12SPA-TF</li> <li>Gigabyte MW53-HP0</li> <li>MSI MEG Z790 ACE MAX</li> </ul>			
Notes	<ul> <li>The chassis fans must run at full speed in the system BIOS.</li> <li>Only the front chassis fan that comes with the Chenbro chassis must be changed to 120 mm x 120 mm x 25 mm 120 CFM fan, purchased separately (Part#: Orion OD1225-12HBIP69K).</li> <li>The dust protection filter in the front door must be removed for proper system ventilation.</li> </ul>			

<sup>\*</sup> Refer to the Power supply sizing for LUMA Pro Series based systems section to choose the right power supply size.

#### **Rosewill RSV-L4000U**

Cards supported (maximum)	7
Part number	Rosewill RSV-L4000U (includes bare-bone chassis only)
Power supply	1200 W (Enermax Revolution D.F.2 1200 W; Part#: ERS1200EWT) 1200 W (SAMA P1200 Platinum)
Power supply bracket	Standard

Fan	<ul> <li>2 x 120 mm x 120 mm x 25 mm standard front fans (included with the chassis)</li> <li>3 x 120 mm x 120 mm x 25 mm 113 CFM front fans (included inside the chassis)</li> <li>2 x 80 mm x 80 mm x 25 mm standard fans (included with the chassis)</li> </ul>
Supported motherboards	<ul> <li>Asus Pro WS W790-ACE</li> <li>ASUS Pro WS W790E-SAGE SE</li> <li>ASUS WS C422 SAGE/10G</li> <li>Gigabyte MW83-RP0</li> <li>MSI MEG Z790 ACE</li> <li>Gigabyte MW53-HP0</li> <li>MSI MEG Z790 ACE MAX</li> </ul>
Notes	<ul> <li>Power supply isn't included with the chassis.</li> <li>Only the three front fans inside the chassis must be changed to 120 mm x 120 mm x 25 mm 120 CFM fans, purchased separately (Part#: Orion OD1225-12HBIP69K).</li> </ul>

## Supermicro CSE-747BTS-R2K20BP chassis

Cards supported (maximum)	7			
Part number	CSE-747BTS-R2K20BP (includes chassis, 2200 W redundant power supply, and fans)			
Power supply	2200 W redundant, model PWS-2K20A-1R			
Power supply bracket	Standard			
Fan	<ul> <li>Two 92 mm x 92 mm x 38 mm 109.7 CFM front fans (Supermicro part#: FAN-0114L4, included with the chassis)</li> <li>Two 92 mm x 92 mm x 38 mm 150 CFM middle fans (Supermicro part#: FAN-0138L4, included with the chassis)</li> <li>Two 80 mm x 80 mm x 38 mm 68.3 CFM rear fans (Supermicro part#: FAN-0082L4, included with the chassis)</li> </ul>			
Supported motherboards	Supermicro X12SPA-TF     Supermicro X13SWA-TF			
Notes	<ul> <li>The system fan speed must be set to HeavylO mode in IPMI.</li> <li>Optional rack-mount kit mounting rails are available (Supermicro part#: MCP-290-000590B).</li> </ul>			

#### Chenbro RM42300-F1U3

Cards supported (maximum)	5			
Part number	RM42300-F1U3 (Includes chassis and fans. Power supply is not included.)			
Power supply	750W (P/N: Corsair RM750X / P/N: EVGA SuperNOVA 750 G5) or 850W (P/N: EVGA Supernova 850G3)			
Power supply bracket	Standard			
Fan	One 120 mm x 120 mm x25 mm <b>85.5 CFM</b> front fan			
Supported motherboards	<ul> <li>Gigabyte MW53-HP0</li> <li>MSI MEG Z790 ACE</li> <li>MSI MEG Z790 ACE MAX</li> <li>ASUS Pro WS W790-ACE</li> </ul>			
Notes	<ul> <li>The chassis must be ordered from Chenbro. Power supply is not included with the chassis.</li> <li>The chassis fan setting is at default.</li> <li>The front chassis fan that comes with the Chenbro chassis must be changed to 120 mm x 120 mm x 25 mm 120 CFM.</li> </ul>			

## **System ventilation**

Without proper system ventilation, the motherboard and add-in cards will operate at elevated temperatures. Continued operation at elevated temperatures will reduce the life expectancy of the overall system. Mechanical components (such as fans), in particular, experience higher failure rates when exposed to elevated temperatures over long periods of time. The system integrator must verify that the system – and the add-in card area in particular – is properly ventilated. The result is a system that runs cooler, has a longer operating life, and offers higher reliability.



Note: To guarantee the longevity of your system and the installed cards, make sure your system is installed in a properly ventilated location. Running Matrox Mura C4K, Mura IPX, and LUMA Pro Series cards above the specified temperatures will lead to permanent damage to the cards that won't be covered by the Matrox warranty.

Mura C4K Series – The Mura C4K Series operating temperature is 0 to 45 °C. When a Mura C4K Series card is installed in a properly ventilated system, the temperature of the Mura C4K Series card recorded by the Matrox Utility tool or APIs *must never* exceed 100 °C.

To monitor and record the temperature changes of your Mura C4K Series card, open a Telnet session at the Command prompt: Telnet <IP ADDRESS OF CONTROLLER>>capturedevice /allnoedid.

Mura IPX Series – The Mura IPX Series operating temperature is 0 to 45 °C. When a Mura IPX Series card is installed in a properly ventilated system, the temperature of the Mura IPX Series card recorded by the Matrox IPX Utility tool or APIs *must never exceed* 100 °C.

To monitor and record the temperature changes of your Mura IPX Series card, use **Matrox IPX utility tool**. From the Mura CD package, install *Network API SDK.msi*. Then, go to system's *Program Files* (x86)\Matrox Graphics Inc\Matrox Network API SDK\Applications and run the IPX utility.exe. From the IPX utility tool window, enter **localhost** to get the temperature of your Mura IPX Series card.

LUMA Pro Series – The temperature of your LUMA Pro Series cards should never exceed 90 °C. To retrieve the temperature of your LUMA Pro Series card, use the Matrox PowerDesk software. From the main interface, click **Help and Troubleshooting** → **Troubleshoot**. Under **Chip temperature data and logging**, you can enable options to monitor the peak temperatures and log the chip temperatures of your LUMA Pro Series card.

# Power supply sizing for Matrox LUMA Pro Series based systems

When assembling a system based on LUMA Pro Series products, the power supply must be sized to provide power for the entire system, including the CPU, all add-in cards, and any peripherals connected. To determine the power supply size, you must consider not only the power requirements of all devices but also the power rails from which the current is being drawn.

Each power supply provides different voltages with varying current load capacities, depending on system usage. For example, a -12V supply (still used in some systems) supports less than 1A of load, whereas a +12V supply, which bears the brunt of the load in modern systems, can easily exceed 50A capacity in many mid-sized power supplies. The remaining voltages (typically, +3.3V, +5V, and +5VSB) fall between these extremes in terms of current load capacity.

Matrox cards, being PCI Express based, draw power primarily from the +12V supply, though a small amount of current is drawn from the +3.3V supply. Since each Matrox SKU has slightly different power supply requirements, using the largest possible current requirement to size the power supply will ensure the power supply is adequate, regardless of the SKUs installed.

To properly size the power supply, the power requirements of all the devices must be added together separately for each supply rail and then the appropriate power supply selected. For example, from the +12V supply the LUMA Pro A380 Quad can consume up to approximately 5.5 A while Mura IPX consumes approximately 2A. Also, LUMA Pro A380 can consume up to 3A from the +3.3V supply. A system integrating the maximum configuration of 4 LUMA Pro A380 cards and 3 Mura-IPX cards would therefore require up to approximately 28 A (or  $4 \times 5.5 A + 3 \times 2A$ ) from the +12V supply and 12A (or  $4 \times 3A$ ) from the +3.3V supply. Note: This is in addition to any pre-existing requirements of the motherboard and installed hardware (CPU, hard disk drives, etc.). For example, if the system configuration requires 15A from the +12V supply and 3A from the +3.3V supply with no Matrox cards installed, once the Matrox cards are installed, the power supply must be capable of providing 15A + 28A (or 43A) on the +12V rail and 3A + 12A(or 15A) from the +3.3V rail for adequate power supply. A system integrated with LUMA Pro A380 Octal can consume slightly more on the +12V rail (approximately 6.25A).

A merely "adequate" power supply, however, isn't sufficient. Most power supplies operate at optimal efficiency at 50-60% of their rated power load. Continually operating beyond this may cause excessive thermal generation and lead to premature aging of the electronic components. It is common practice to ensure that the power supply can supply additional current beyond what's required for the system configuration in typical use. For maximum efficiency and reliability, make sure to provide a minimum 50% margin on the power supply rating. In the example above, a system requiring 43A on the +12V rail and 15A on the +3.3V rail would require a total of approximately 566W (516W from +12V rail and 50W from +3.3V rail). Assuming another 10W for the +5V rail, the total system requirements are approximately 576W. A 50% margin on the power supply means specifying a supply of 864W that can supply around 64.5A on the +12V supply and around 22.5A on the +3.3V supply.

Providing less margin than specified above may lead to excess heat generation within the power supply and premature wear-out of electronic components, possibly compromising the overall reliability of the product.



Note: The margin provided on the power supply must never be less than 35-40%.

For a common display wall setup that supports up to seven Matrox cards and uses a mid-range Intel CPU, we recommend a minimum power supply of 850W. For larger systems, the power supply must be increased according to the requirements of the backplane/motherboard (including the CPU and any other installed boards).

#### Shipping an integrated system

While shipping an integrated system, make sure that add-in cards are properly installed in the expansion slots and the board bracket is screwed securely to the chassis. Most systems have a board retaining clip to protect cards from shock and vibration. If your system has a board retaining clip, use it to securely clamp the boards into place. For more information, see the user guide for your system or chassis. Follow the system /chassis manufacturer's guidelines for proper installation, shipment, and transportation of an integrated system. Failure to do so may cause damage to the cards due to shock and vibration during shipping and transportation.

# PCI Express® bandwidth considerations in Matrox LUMA Pro Series and Mura IPX Series based systems

System architecture is an important factor in determining overall capture/display performance with Matrox LUMA Pro Series, Matrox Mura C4K, and Matrox Mura IPX based systems. While the input resolutions and formats must be taken into account, the system bus-level architecture also plays an important role in determining how to optimize the system to obtain the best possible performance. This section attempts to clarify some of the issues that must be considered when implementing Mura-based Display Wall architectures.

#### Input source bandwidth requirements

Any capture architecture receives its data from external sources and transfers it to one or more graphic engines for display. The inputs may take many forms: HDMI, Display Port and SDI. Each of these inputs places a different load on the system in terms of quantity of data to be transferred. Each input type is also associated with a default data format HDMI, Display Port and SDI are typically transferred in RGB: 8:8:8, 10:10:10 (24/32 bits per pixel), and in YUV: 4:4:4, 4:2:2, 4:2:0 (8/10 bits per component). Understanding the different transmission formats and their bandwidth requirements will help guide the integrator in setting up and configuring a Mura-based capture system.

The bandwidth required by any input source can be expressed as follows:

$$BW = Res_x \times Res_y \times fps \times Bytes_{pixel}$$

Where the values *fps* and *Bytespixel* represent the number of frames per second and the number of bytes taken by each pixel, respectively. In HDMI, DP and SDI modes, each pixel requires 3 Bytes for RGB 8:8:8 or YUV 4:4:4 8 bit.

$$BW_{4K} = 3840 \times 2160 \times 60 \times 3 \text{ (4:4:4 8-bit packed)} = 1,500 \text{ MB/s}$$



Note: In some cases, it may be possible to capture HDMI, DP or SDI sources and transfer them internally using a 16-bit YUV format. Doing so will reduce the amount of system bandwidth required to transfer the input data; however, it will generally also degrade the capture quality (since less data is used to represent each pixel). This option should be used only when necessary and with sources when the quality of input capture can be sacrificed.

Regardless of the resolutions and formats of the various inputs, the available system bandwidth should not be exceeded. Doing so will result in reduced system performance and/or instability.

#### **PCI Express architecture overview**

To understand how system architecture plays a role in the available bandwidth, a basic understanding of the PCI-Express architecture is helpful. This section describes very briefly, and in general terms, the PCI-Express architecture with the goal of providing some background.

PCI-Express is a point-to-point serial transmission interface using high-speed differential signaling to enable high-performance transfer of data within systems. The PCI-Express architecture is currently in its fifth generation, with each generation providing increased performance over its predecessor. The following table summarizes the peak data transfer capabilities of the PCI-Express architecture based on generation and link width (the link width is the "size" of the electrical connection between two PCI-Express devices). Generally speaking, bus efficiency is anywhere in between 70% and 90% of this peak bandwidth.

The PCI Express specification also defines backward-compatibility between PCI Express devices. That is, a device designed for Gen-3 PCI Express functions at Gen-2 speeds when connected to a Gen-2 device, a Gen-2 device functions at Gen-1 speeds when connected to a Gen-1 device, and so on.

Link width*	PCIe Gen-1	PCIe Gen-2	PCIe Gen-3	PCIe Gen-4	PCIe Gen-5
×1	250 MB/s	500 MB/s	1 GB/s	2 GB/s	4 GB/s
×4	1 GB/s	2 GB/s	4 GB/s	8 GB/s	16 GB/s
×8	2 GB/s	4 GB/s	8 GB/s	16 GB/s	32 GB/s
×16	4 GB/s	8 GB/s	16 GB/s	32 GB/s	64 GB/s

The link width provides a measure of the data transfer capabilities of the link in a single direction. Since each PCI Express lane contains both an upstream and a downstream link, the effective bandwidth is doubled. The numbers in this table represent the maximum bandwidth available in each direction.

For maximizing data transfer capabilities within a system, it is desirable to have the widest lane widths possible throughout the system. An ideal system for Display Wall applications provides all add-in boards with x16 PCI-Express Gen3 links or x8 PCI-Express Gen4 links, maximizing throughput at each communication link.


#### **General bandwidth guidelines**


It is virtually impossible to provide general guidelines for the installation of Mura cards in a PCIe-based system as there are many different motherboards, and each client's Display Wall implementation is unique. Knowledge of the system architecture and the number and types of inputs is required to optimally place capture cards in the system. By carefully calculating the required bandwidth and ensuring that no data bottlenecks are present at any point in the system, the integrator can guarantee the optimal functioning of the Mura-based Display Wall.

#### A word about system architecture and performance

One factor that should be considered when using Matrox LUMA Pro Series, Mura C4K, and Mura IPX is that to improve performance, transfers are performed using system memory, rather than peer-to-peer transfers. In other words, transferring graphical or video data from a capture card to a display source involves first transferring the data to system memory and then from system memory to the display adapter. This is done to address performance limitations imposed by the combination of capture and graphics cards.

Prior to Luma based controllers, the systems used for Mura-based Display Walls were based on a switched architecture (that is, the PCI-Express connectors are connected to PCI-Express switches that form the fabric, or backbone, of the system architecture) to provide multiple PCIe slots for add-in cards. However, the most recent motherboards no longer use switch-based architecture but rather use lane-based architecture that is connected directly to the CPU's to provide multiple PCIe slots. For example, shown below is the block diagram of the Intel Xeon W-35xx/25xx/34xx/24xx platform with Intel W790 chipset. The Intel Xeon W-35xx/25xx/34xx/24xx based platforms have 112/64 PCIe lanes available directly from the CPU. Using lane-based architecture provides sufficient bandwidth without any bottlenecks from the chipset, optimal performance, and reduce latency for graphics intense applications. Knowledge of the capabilities of the motherboard is essential to properly configure the system to maximize the overall performance.:

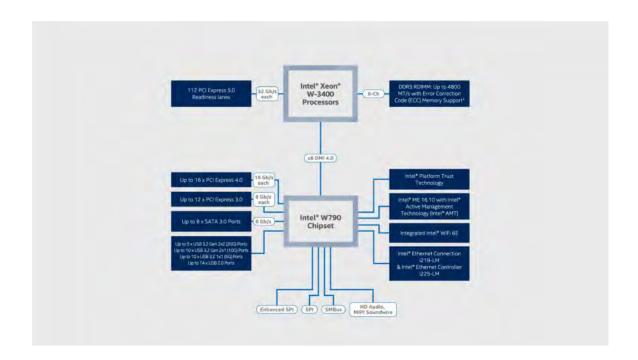

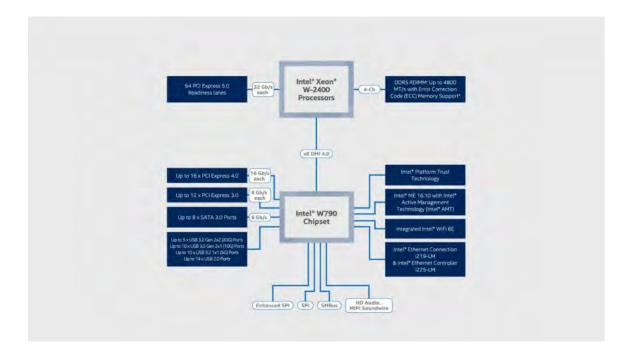

Source: Intel.com

# **Contact us**

The Matrox Video Web site has product literature, press releases, technical material, a sales office list, trade show information, and other relevant material. Visit us at <a href="https://video.matrox.com">video.matrox.com</a>.

 $If you have any questions or comments about our products or solutions, contact us at \underline{https://video.matrox.com/en/forms/contact/general.}\\$ 

You can get technical assistance by contacting Matrox Video technical support at <a href="matrox.com"><u>dwcsupport@matrox.com</u></a>.

## **Disclaimer**

Information in this document may contain technical inaccuracies or typographical errors. Information may be changed or updated without notice. Matrox reserves the right to make improvements and/or changes in the products, programs and/or specifications described in this information at any time without notice. All trademarks and trade names, service marks and logos referenced herein belong to their respective owners.

ASUS Trademark is either a US registered trademark or trademark of Asustek Computer Inc. in the United States and/or other countries. Reference to any ASUS products, services, processes, or other information and/or use of ASUS Trademarks does not constitute or imply endorsement, sponsorship, or recommendation thereof by ASUS.

Dell and Precision are trademarks or registered trademarks of Dell Inc.

DisplayPort is a trademark of VESA.

HDMI is a registered trademark of HDMI Licensing, LLC in the United States and/or other countries.

HP is a registered trademark of the Hewlett-Packard Development Company, L.P. in the U.S. and other countries.

Intel, Core, and Xeon are trademarks or registered trademarks of Intel Corporation in the U.S. and/or other countries.

Linux is a registered trademark of Linus Torvald in the United States and in other countries.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

NVIDIA is a registered trademark of NVIDIA Corporation.

OpenCL is a trademark of Apple Inc.

OpenGL is a trademark or registered trademark of Silicon Graphics, Inc. in the United States and/or other countries worldwide.

PCIe and PCI Express are registered trademarks and/or service marks of PCI-SIG.

Copyright © 2025 Matrox is a registered trademark of Matrox Graphics Inc. All rights reserved.

