



ConvertIP Daisy Chain Operation

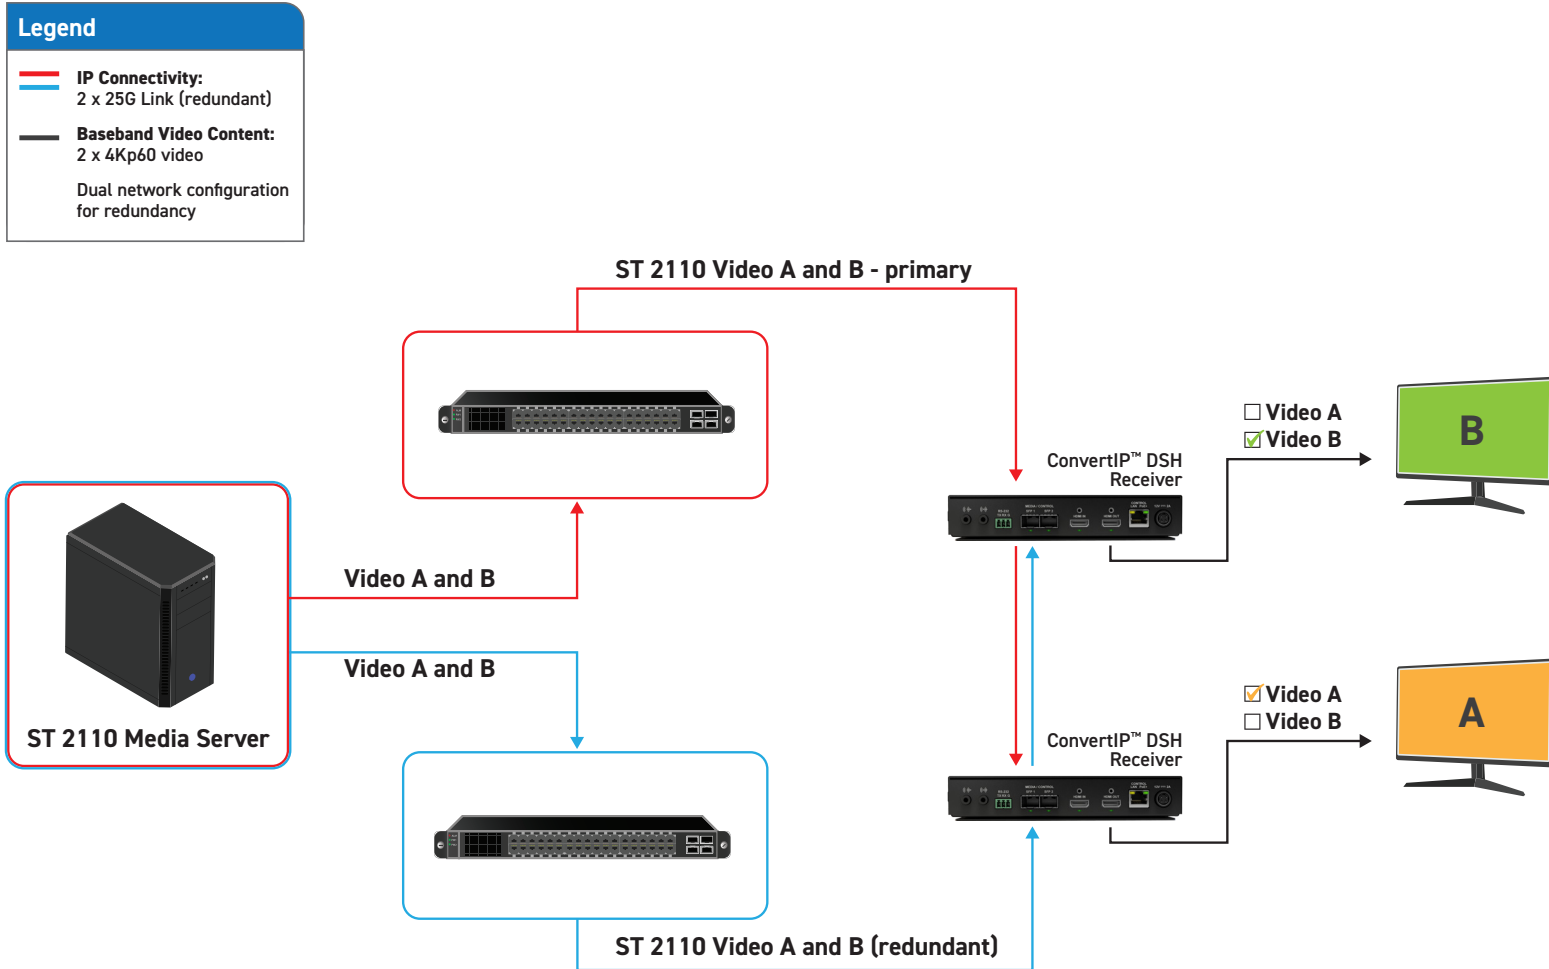

ConvertIP receivers configured in Daisy-chain mode converting UHD 2110 video content [2160p59.94] for HDMI monitoring.

ConvertIP Daisy Chain Operation

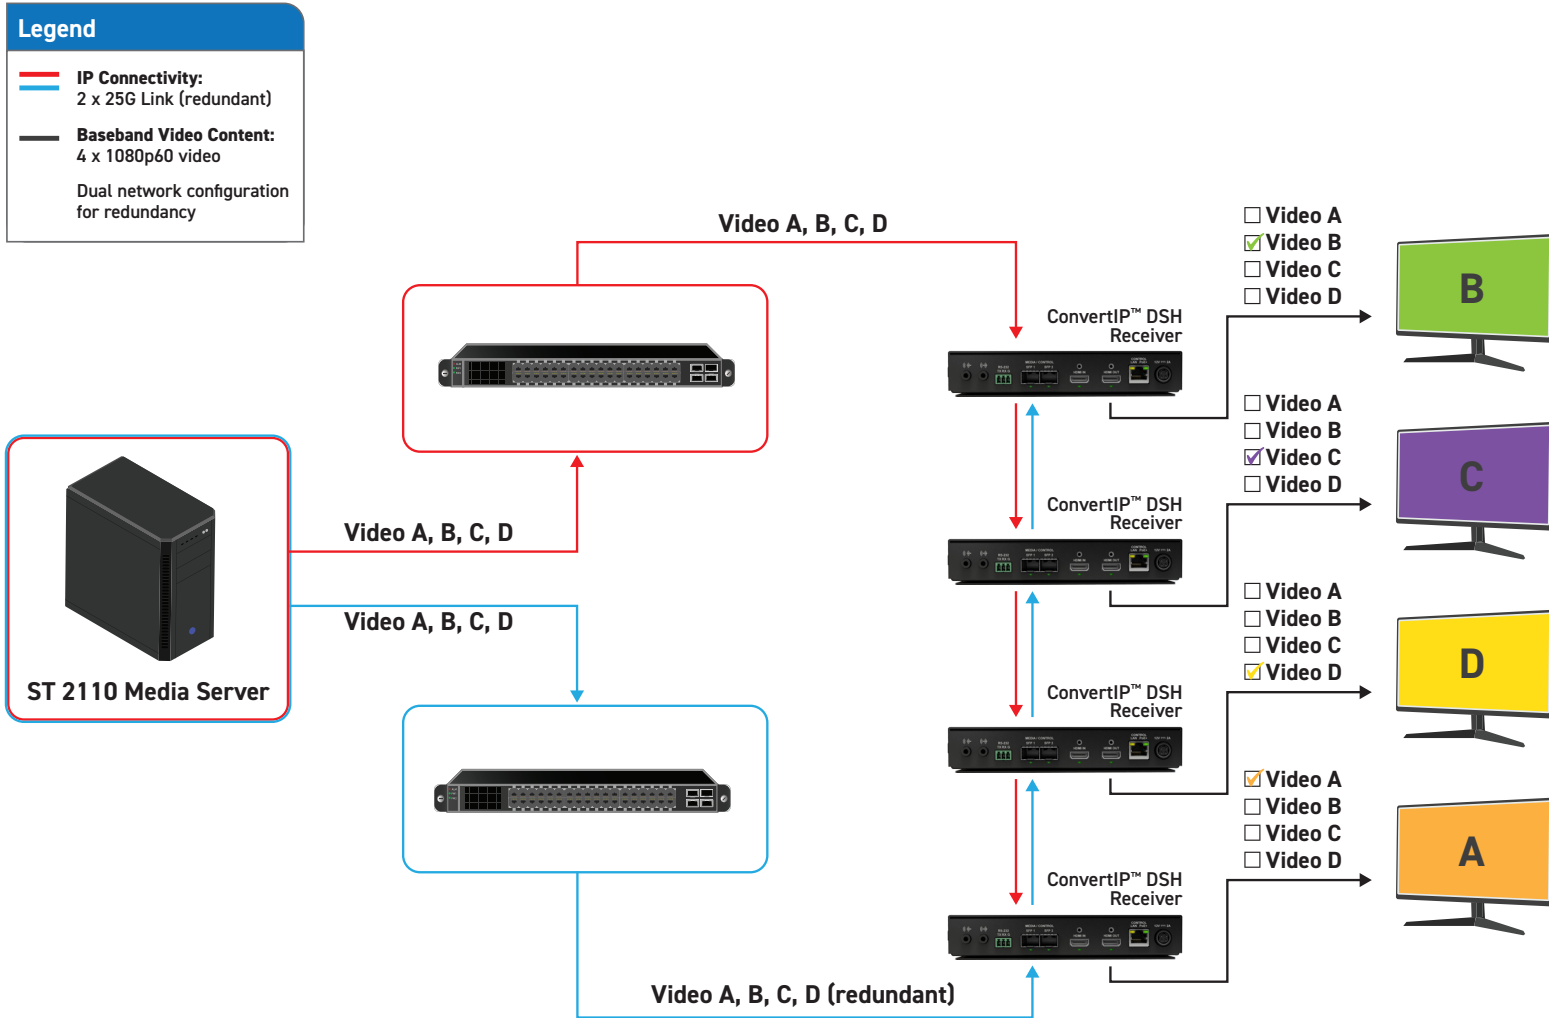


ConvertIP receivers configured in Daisy-chain mode converting FHD 2110 video content [1080p59.94] for HDMI monitoring.

ConvertIP Daisy Chain Operation


Legend

- **IP Connectivity:**
2 x 25G Link (redundant)
- **Baseband Video Content:**
4 x 1080p60 video
- Dual network configuration for redundancy

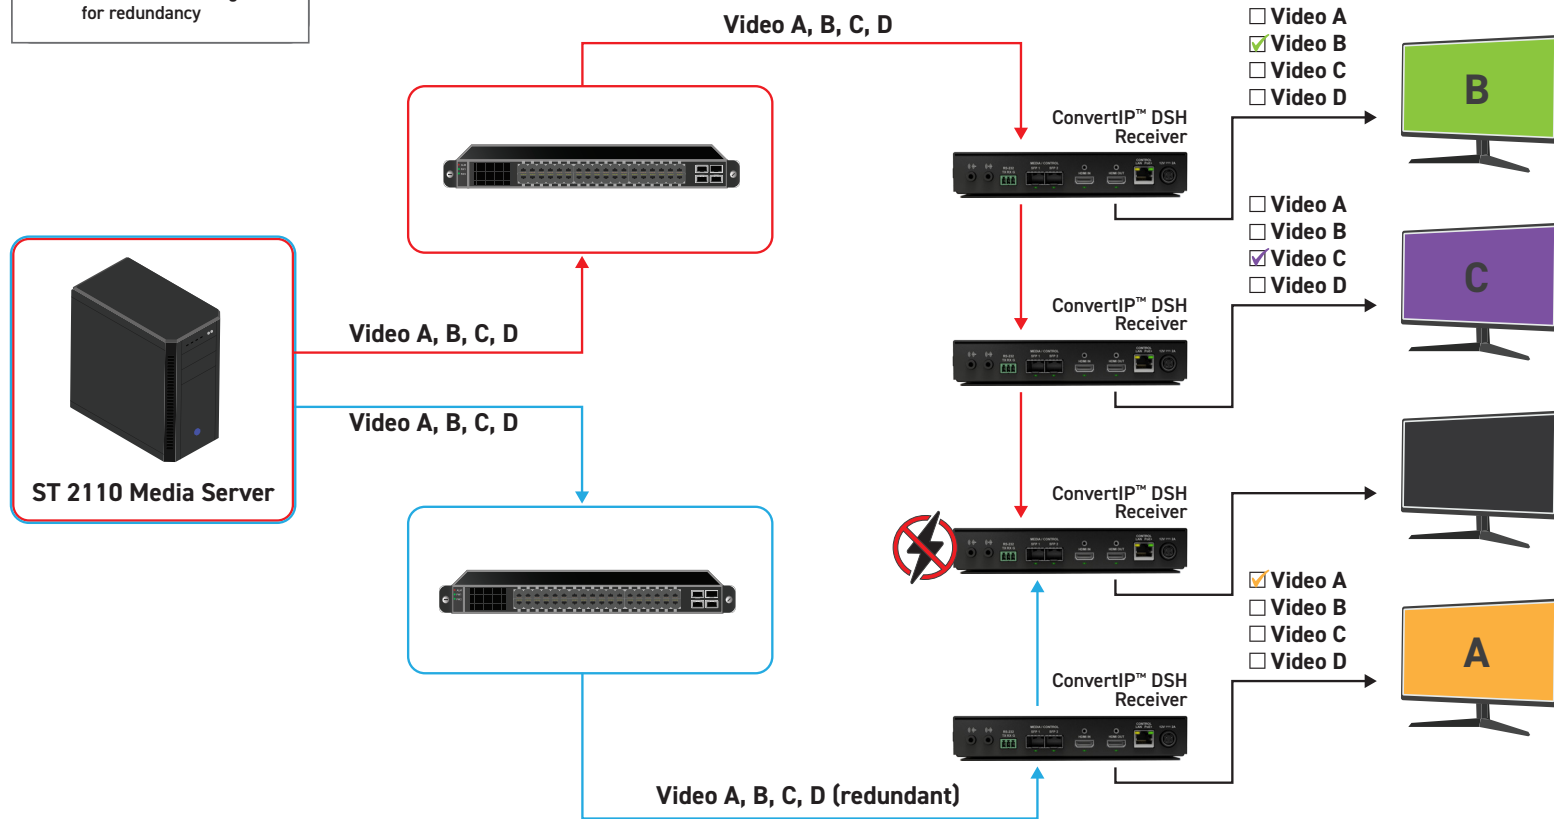

When Installed in 2022-7 environment, view content in case of a power disruption.

ConvertIP Daisy Chain Operation

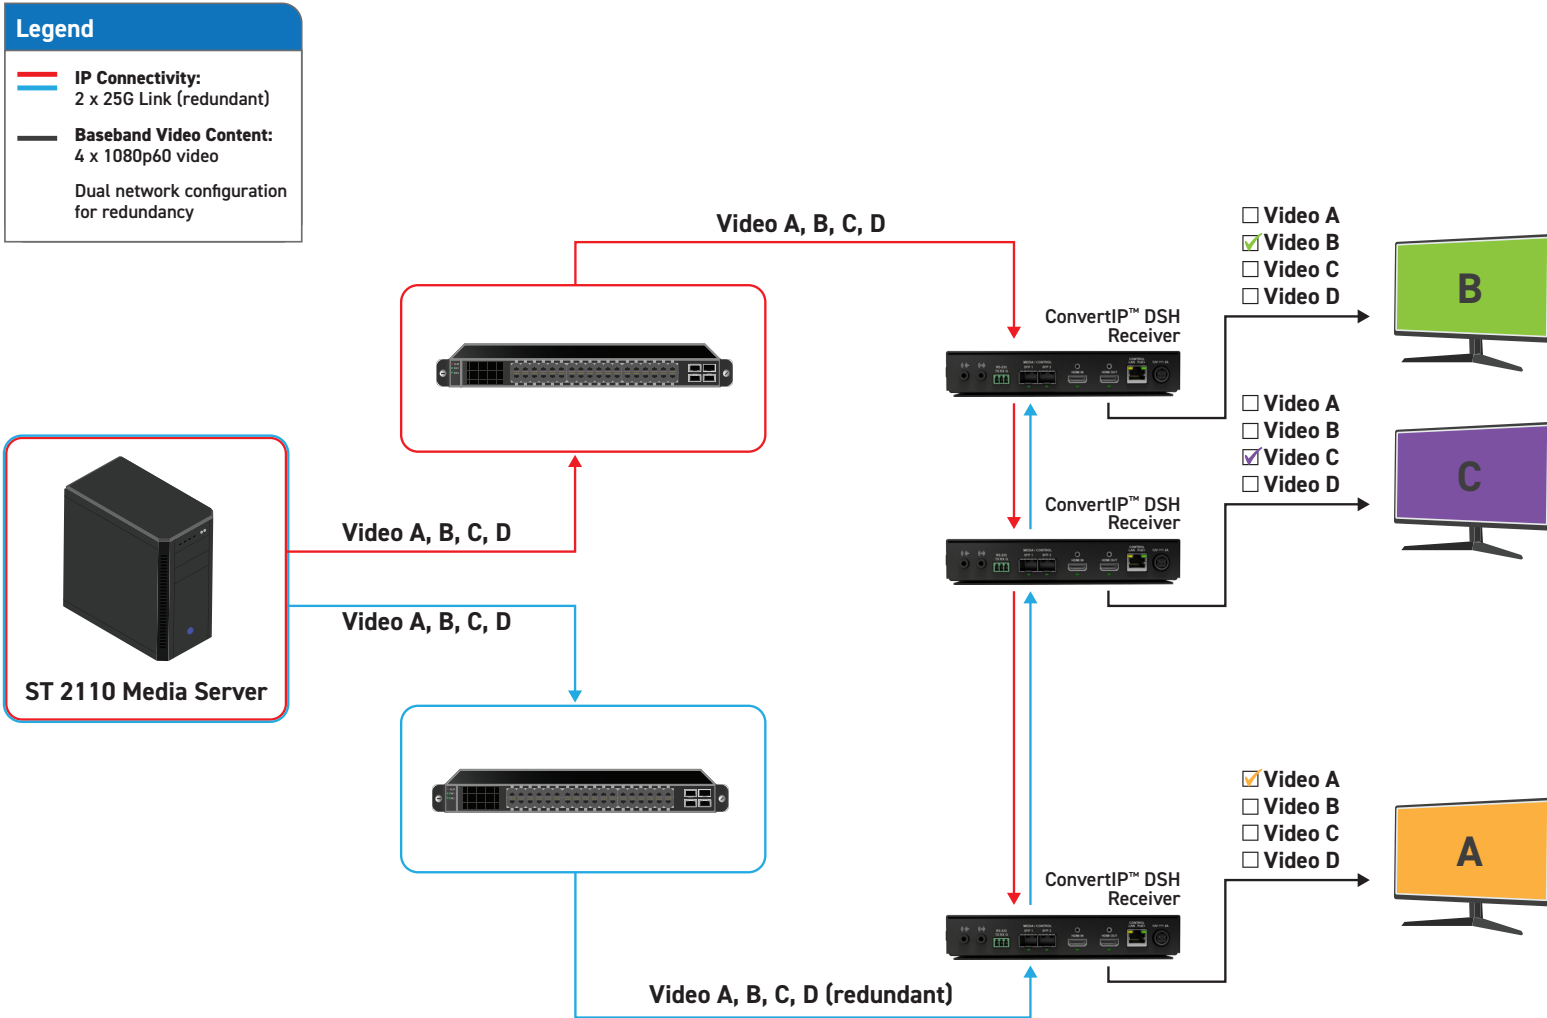


Re-establishing full 2022-7 easily route signals to remaining monitors.

ConvertIP Daisy Chain Operation

Legend

- **IP Connectivity:**
2 x 25G Link (redundant)
- **Baseband Video Content:**
2 x 4Kp60 video
- **2110 Source:**
2 x SDI Cameras
- Dual network configuration for redundancy

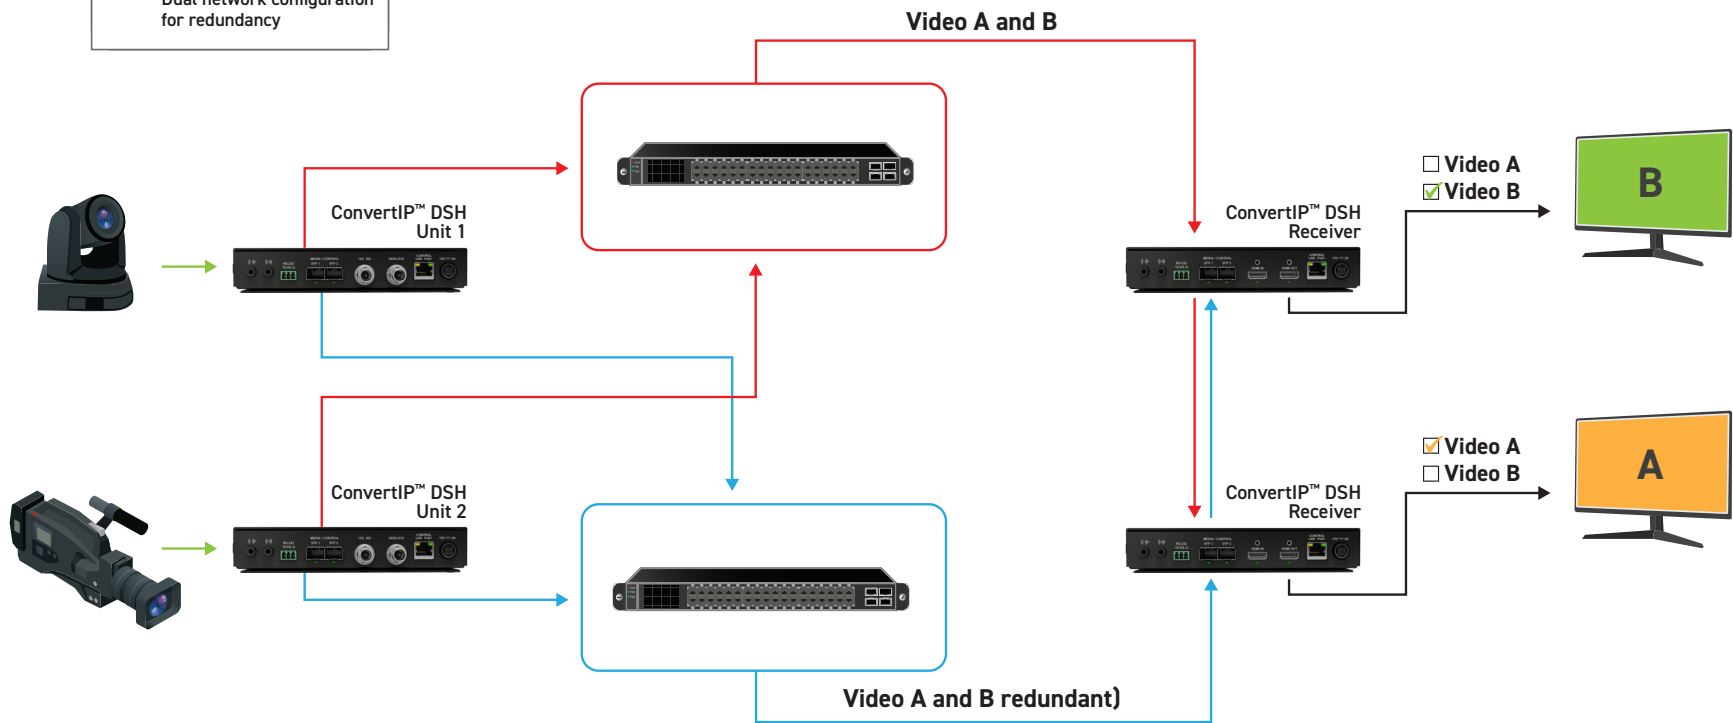

IBC Demo Using ConvertIP Tx units.